

MINI-SMMS 7

SMMS 7  
SUPER MODULAR MULTI SYSTEM

"SMMS -7 the senses of cooling"



Air Conditioning for large building  
**Product Catalogue**

**INDEX**
**Introduction**

<b>Toshiba air conditioning vision</b>	3
<b>7 Senses of smartness</b>	4
<b>7 Smart features</b>	
<b>Product line up</b>	6

**7 Smart features**

Higher energy efficiency	7
Space saving and light weight	8
Wider ambient operation	9
Environmentally- oriented	9
High reliability	10
Design flexibility	12
Easy installation and maintenance	14

**Outdoor units (SMMS-7)**

New design outdoor units	16
Outdoor units line-up	18
Outdoor units specifications	20
Outdoor units external view drawings	28

**Outdoor units (Mini-SMMS 7)**

Mini-SMMS 7 features	30
Piping design flexibility	38
Outdoor units specifications	39
Outdoor units external view drawings	40

**Indoor units**

Indoor units line-up for SMMS-7	42
4-way air discharge cassette type	44
Compact 4-way cassette type	46
2-way air discharge cassette type	48
1-way air discharge cassette type	50
Slim duct type	52
Super slim duct type	54
Concealed duct high static pressure type	56
Concealed duct type	58
Ceiling type	60
High-wall type (series 3)	62
High-wall type (series 7)	63
Floor standing concealed type	64
Floor standing cabinet type	65
Console type	66
Floor standing type	67
Large capacity floor standing duct type	68
Large capacity floor standing direct type	69
DX-COIL Interface	70
Fresh air intake indoor unit type	72
Air-to-Air heat exchanger with DX-coil	74
Air-to-Air heat exchange (stand alone unit)	76
Indoor unit accessories for SMMS-7	78

Remote controllers	80
Building management systems	84
Open network systems	86
Application controls	88
Safety precautions	91

# TOSHIBA AIR CONDITIONING VISION



## *Better Air Solutions*

Through our commitment to world-class efficiency, versatile scalability and leading quality, Toshiba Air Conditioning advances leading-edge technologies to find the most forward-thinking solutions possible for your world.



# 7 Senses

Because understand your real needs, we have searched in air conditioning, which we have innovately developed this VRF is cooling optimized for hot and humid temp

»»» Sense of efficiency  
Higher energy efficiency

»»» Sense of care  
Environmentally - oriented

»»» Sense of space  
Space saving and light weight

»»» Sense of end  
Wider ambient op



# of smartness

ed for and finally found 7 senses of smartness  
ped into the most advance technologies SMMS-7  
perature.

»»» Sense of convenience

Easy installation and maintenance

»»» Sense of flexibility

Design flexibility

»»» Sense of strength

High reliability



urance  
operation

**SMMS 7**  
SUPER MODULAR MULTI SYSTEM


"SMMS-7 the senses of cooling"



Sense of efficiency


Higher energy efficiency

Full load EER

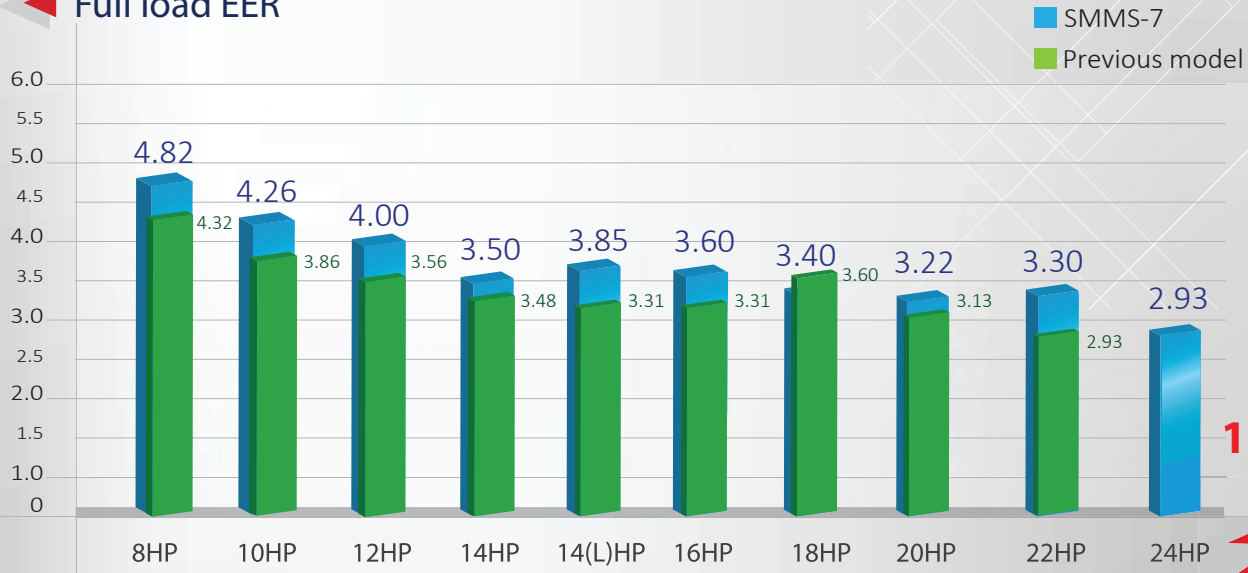

Max 16% UP!

50% Part load EER

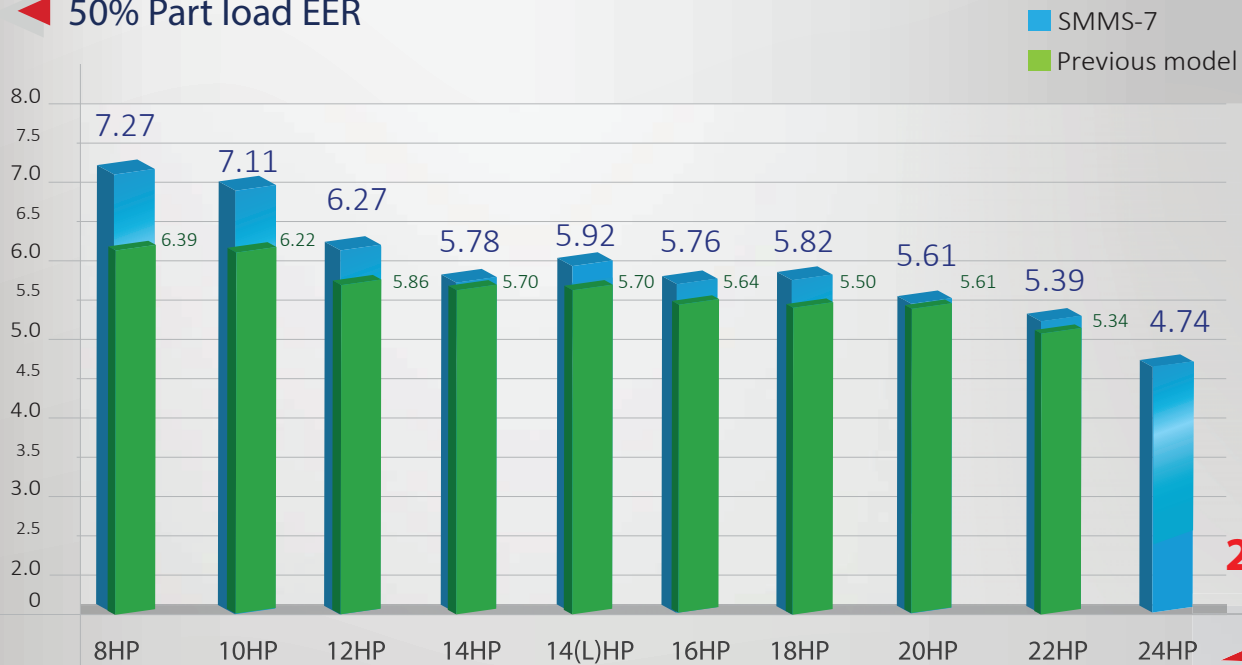

Max 26% UP!


>>> Sense of space

# Space saving and light weight

## 20 HP Model



Previous model


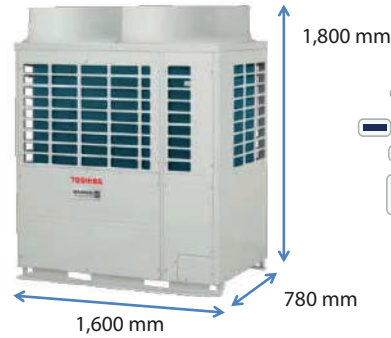


**-24%  
Reduced** space saving

## 24 HP Model



Previous model

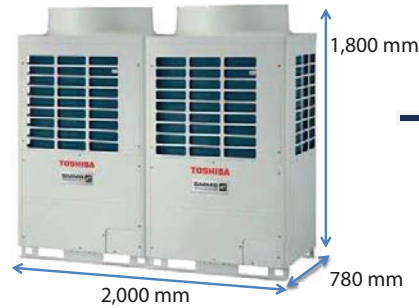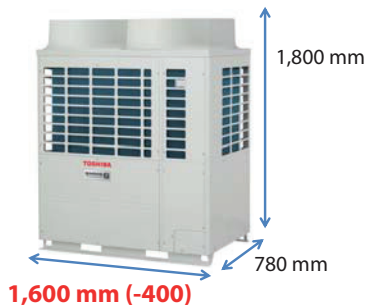

**-20%  
Reduced** space saving

## 60 HP Combination model

The new compact design not only reduce the installation foot print, but also reduce the time to deliver and install



Previous model



**-18%  
Reduced** space saving






»»» Sense of endurance

Wider ambient operation

◀ Outdoor temperature range

The combination of new compressor design and system controls have enabled SMMS-7 to expand its allowable operational temperature range

Operation ambient temperature expansion  
(Cooling: °CDB)

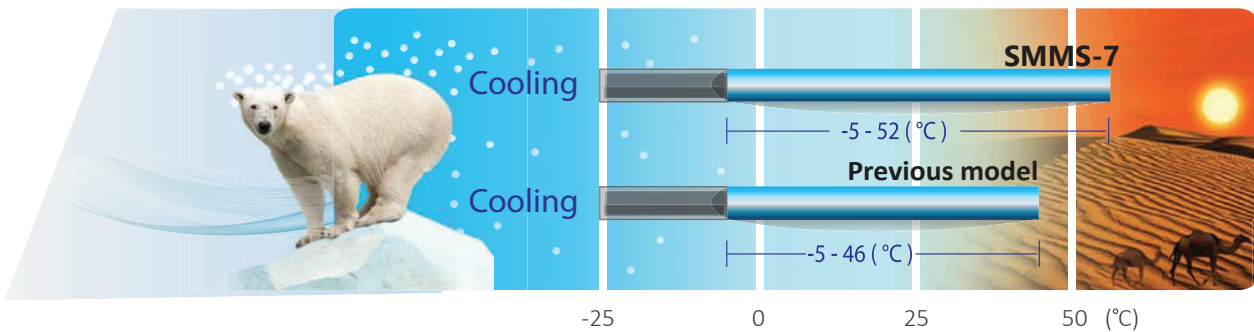


Note : Based on equivalent piping length of 7.5 m and piping height difference of 0 m.

»»» Sense of care

Environmentally - oriented

◀ Reduce refrigerant amount

More than 20% by delicated cooling design\*

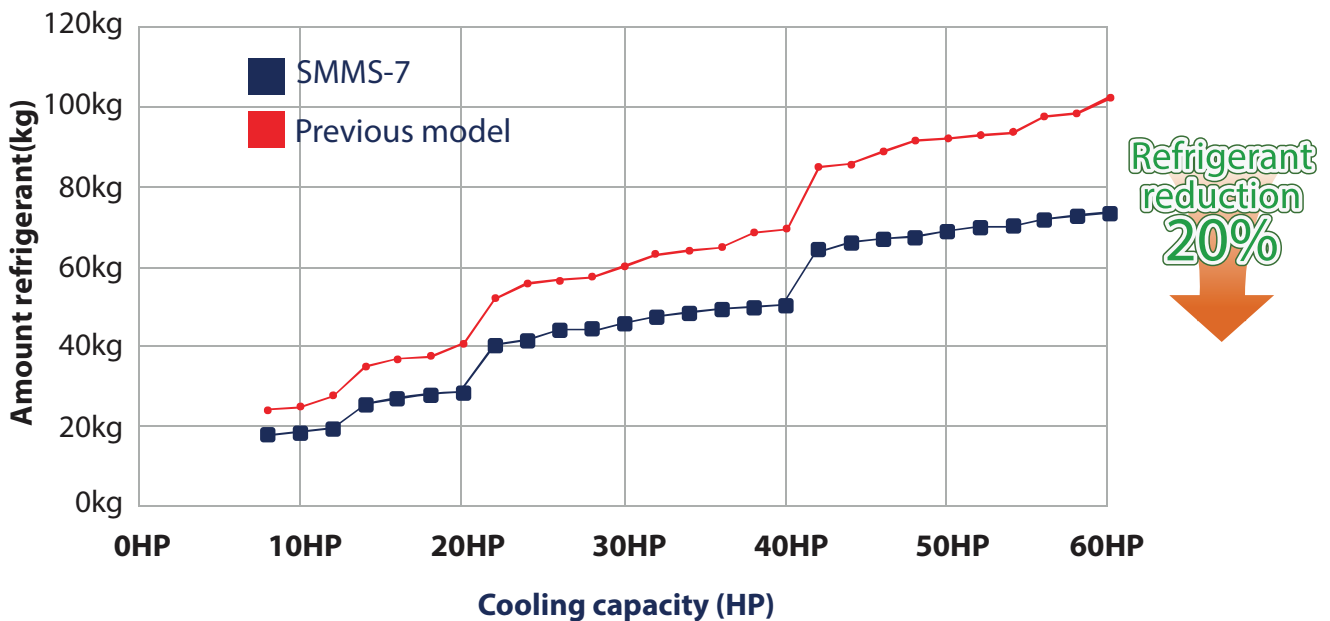


\* Testing under controlled conditions.

# >>> Sense of strength

## High reliability


### ◀ DLC (Diamond like carbon) coated vane

Diamond Like Carbon (DLC) protection coating inside "All compressor's vane" increases efficiency and reliability

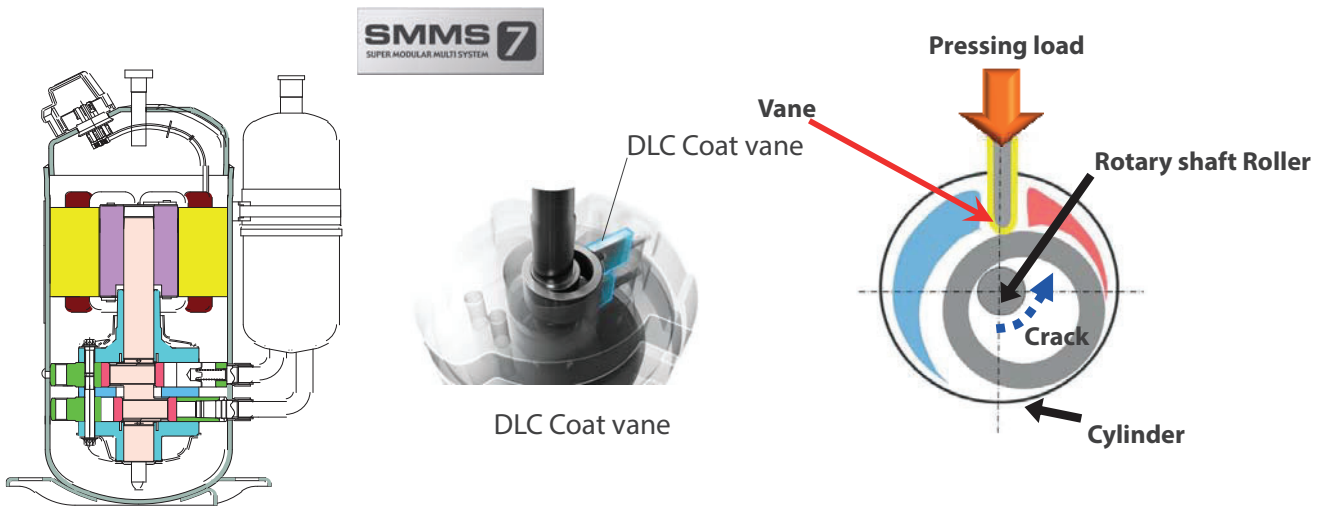

### ◀ 2-stage vane

2 stage vane reduce friction and results in a significant improvement in reliability and performance.

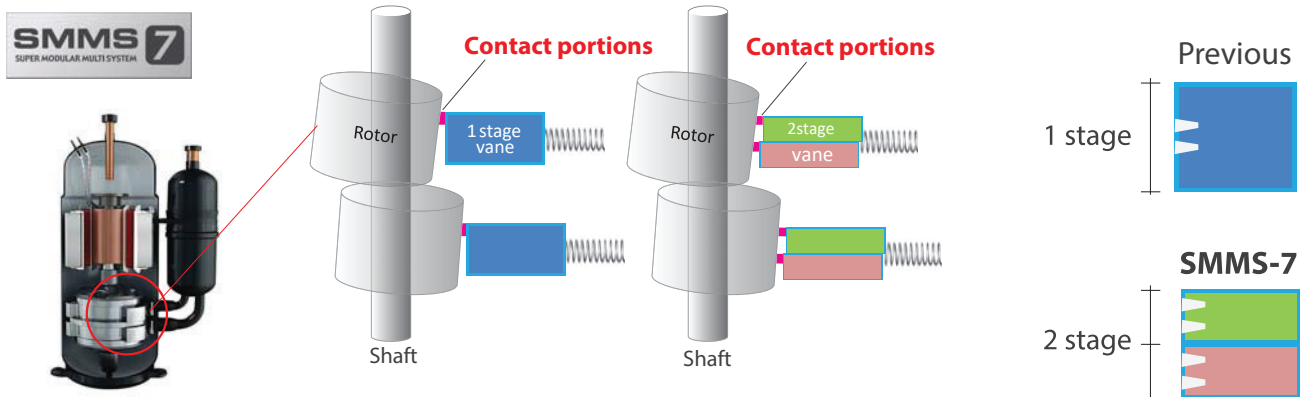


»»» Sense of strength


## High reliability

### ◀ Small animal protection

To prevent the small animals from entering and interfering with the electronic components in the system, our new inverter box has been upgraded with additional protection, while allowing reliable operation. The inverter box is fitted with punched sheet metal & resin sheet.

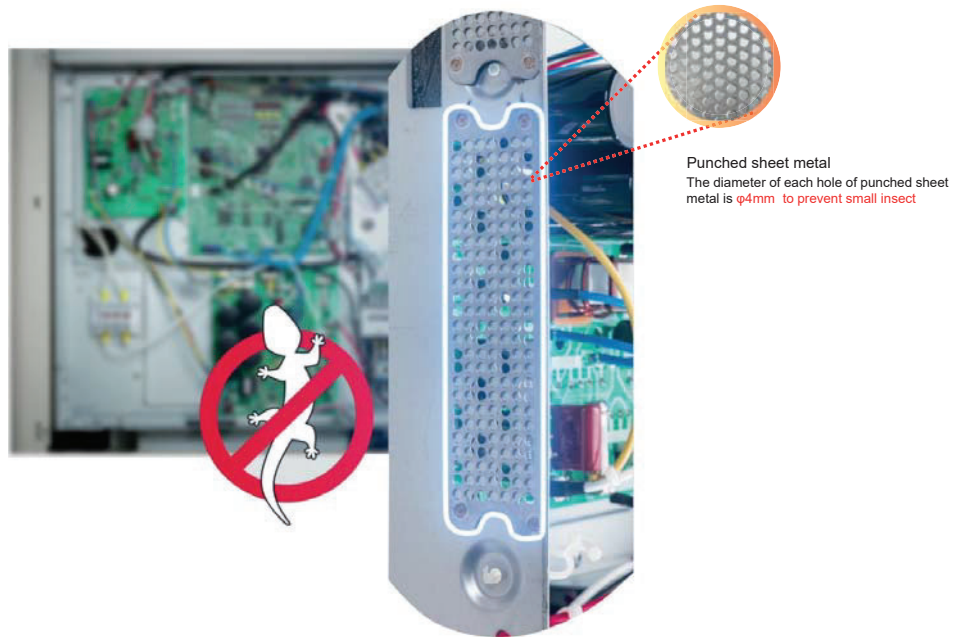

In order to stop small animals get into inverter box, SMMS-7 has resin sheet. It's preventive measure to keep them from shorting out PC boards.

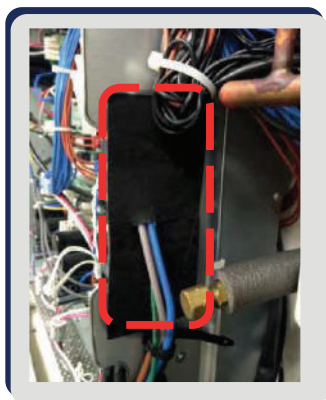


# >>> Sense of flexibility

## Design flexibility

### ◀ 200 % Maximum diversity

Thanks to the newly developed refrigerant circuit, the diversity of outdoor units has drastically increased. This makes it much easier to design for installations with many rooms or offices.

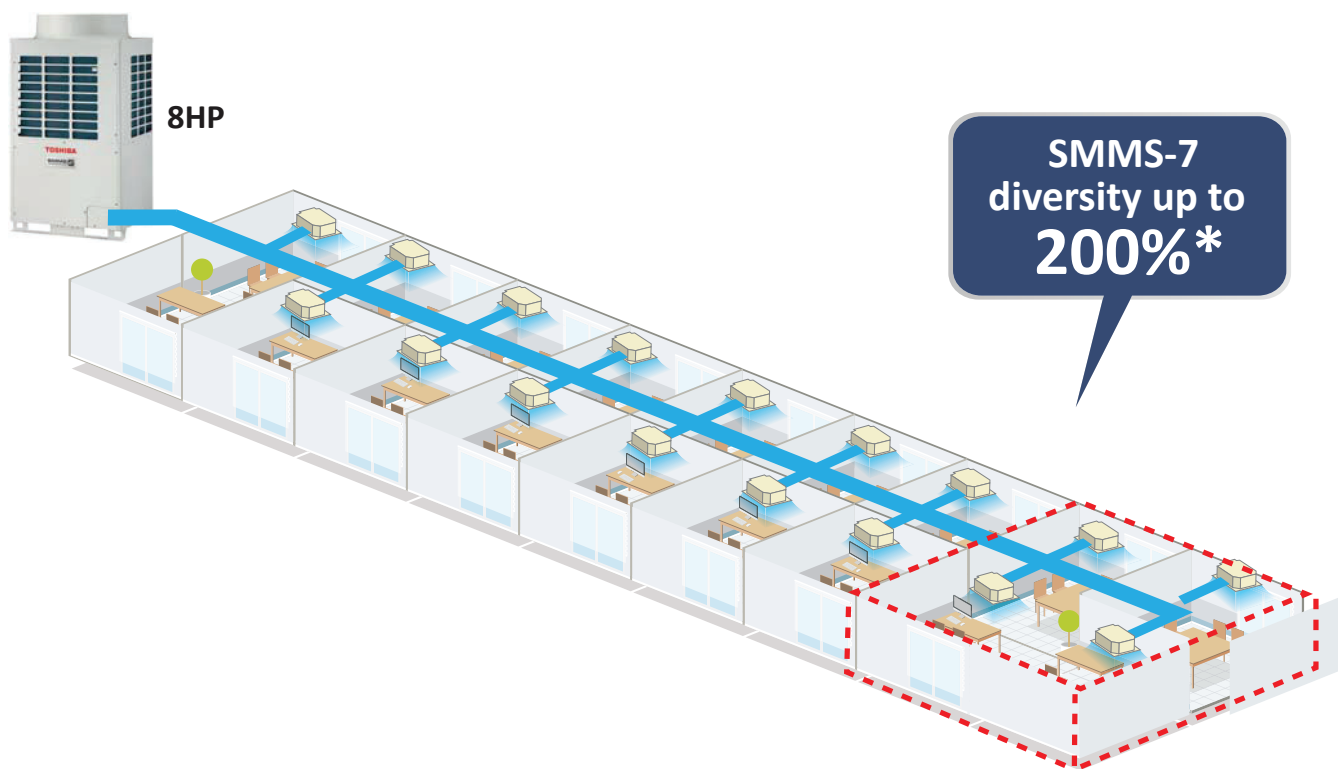

### Standard model

8HP	10HP	12HP	14HP	16HP	18HP	20HP	22HP	24HP
200%	200%	200%	200%	200%	200%	200%	200%	200%

26HP	28HP	30HP	32HP	34HP	36HP	38HP	40HP
180%	180%	180%	180%	180%	180%	180%	180%

42HP	44HP	46HP	48HP	50HP	52HP	54HP	56HP	58HP	60HP
150%	150%	150%	150%	150%	150%	150%	150%	150%	150%


\*Single module

# Sense of flexibility

## Design flexibility


### Total piping length

Applied with Toshiba's unique and greatly improved technology, SMMS-7 can reach up to 1,000 meters maximum piping length.

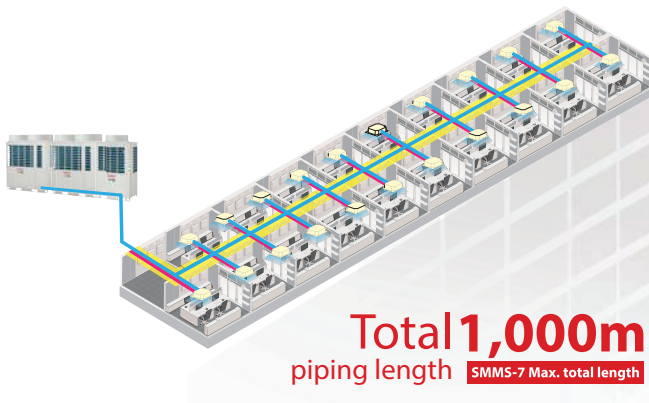

### Farthest pipe from 1st branch

Even more convenient with the piping distance from the first branch to the furthest indoor unit at 90 meters, increasing the flexibility of the installation within the hotel or office building.

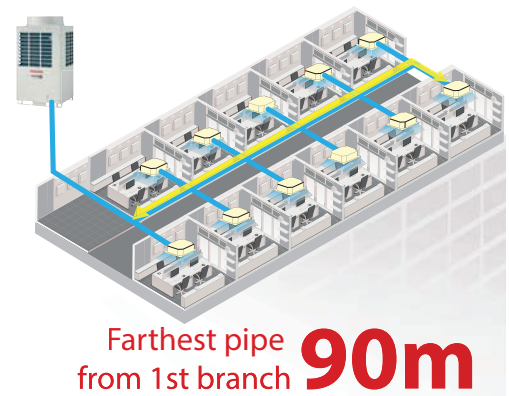

### Farthest equivalent length

The maximum equivalent distance between outdoor unit and farthest indoor unit tops at 235 meters, which tops the industry class.



### Height between indoor units

Another industry's top class is a maximum vertical distance between indoor units which reaches up to 40 meters, equal to an entire 11-storied building. SMMS-7's enhanced piping capabilities result in more benefits for the system design, installation flexibility, as well as the less installation cost.




>>> Sense of convenience

Easy installation and maintenance


◀ Installation flexibility

New system of oil management, balance pipe no longer required.

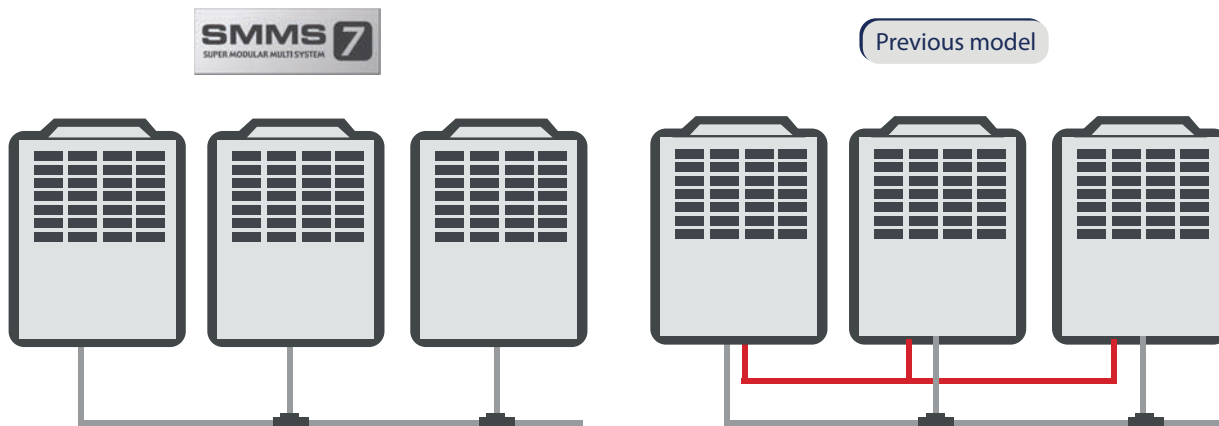


◀ Easy maintenance

Secure space for maintenance in machine area. Temperature control of liquid pipe leads to removal of liquid tank, leading to reduce refrigerant.

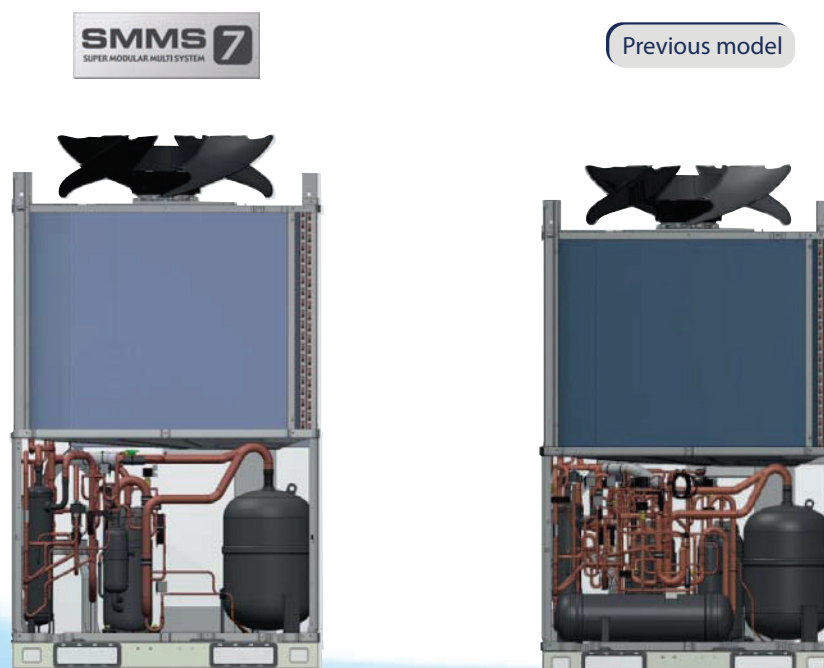

## SMMS wave tool

With SMMS wave Tool, you can read and write data from outdoor unit directly on your smart phone without the needs of connecting PC or opening cabinet.

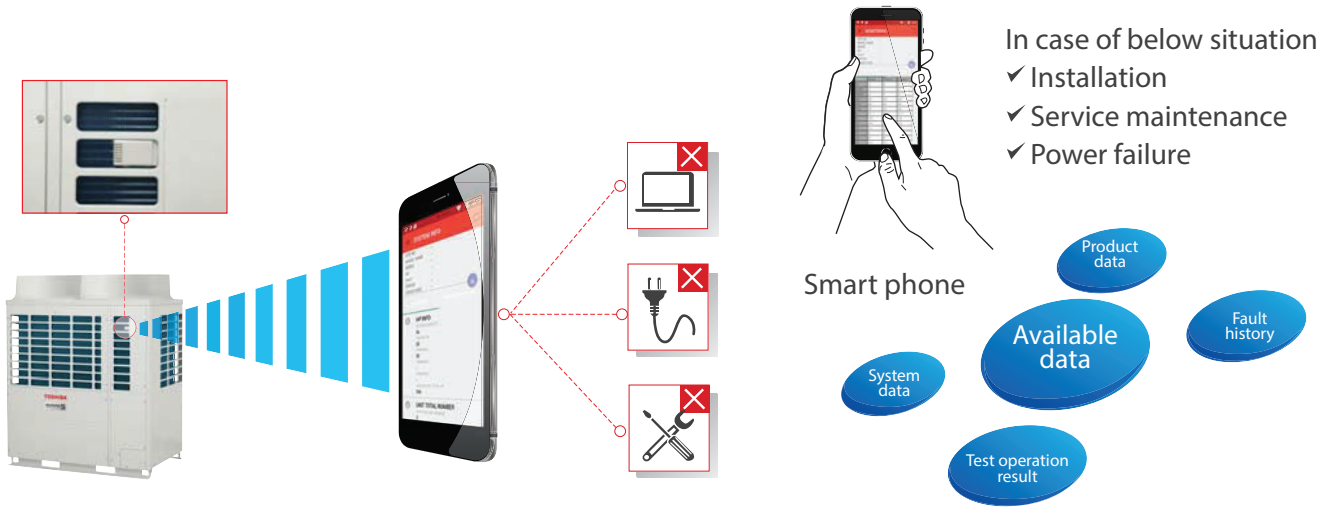


By the new smart phone application, the testing and commissioning can be done without opening the cabinet.




\*Smartphone specification : Android™ OS 5.0

## The external static pressure

The SMMS-7 units are suitable for challenging installations where high external static pressure performance

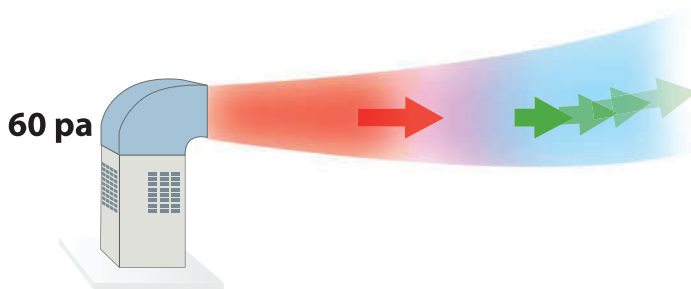

Air flow simulation diagram

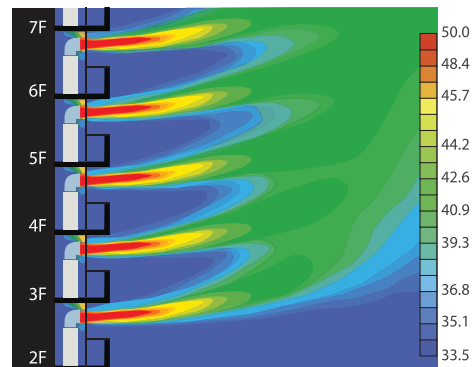


Note : This result is analytical simulation, that does not guarantee actual temperatures.

## ◀ New path of heat exchanger


Newly developed to reach max efficiency in cooling operation.  
Re-design for cooling realized dedication design of heat exchanger.

\*Not suitable for heating by H/E freezing risk due to evaporation temp drops pressure drop loss.

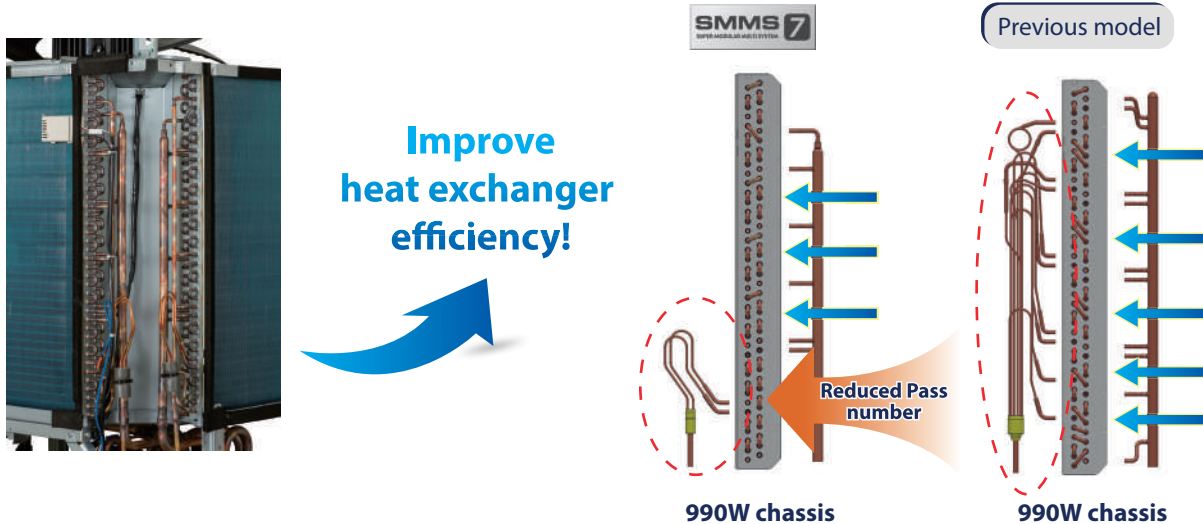


## ◀ New slim heat exchanger with 24 HP

With 3 pipes rows the heat exchanger has more surface area. This increase contribute to improve the overall performance and at the same time operate more efficiently.

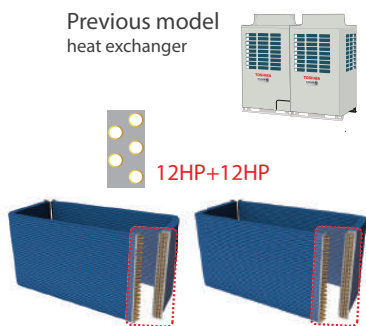


## ◀ New heat exchanger

Newly developed to reach max efficiency in cooling operation.

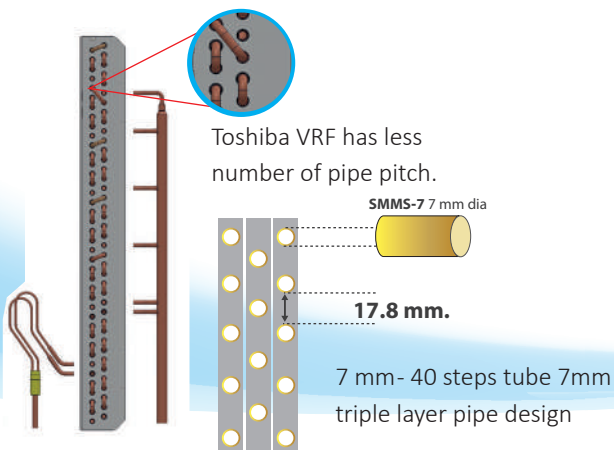

## ◀ 4-way heat exchanger

Heat exchangers are located on all four sides of the outdoor unit, ensuring air flow is equal in all directions.

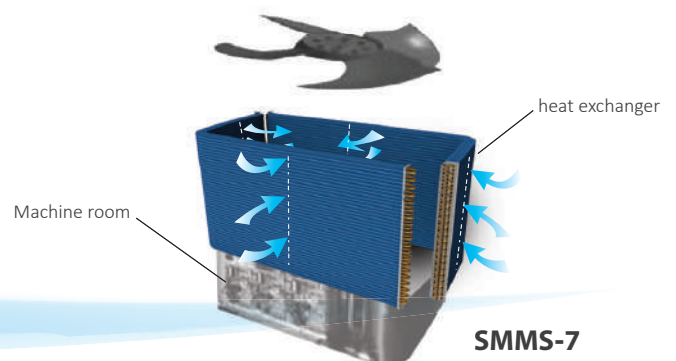




## New developed accumulator


Newly developed accumulator due to decrease pressure drop loss and add parts to improve reliability.

\* by delete of J-pipe, additional pipe & valve for return oil need to be added.

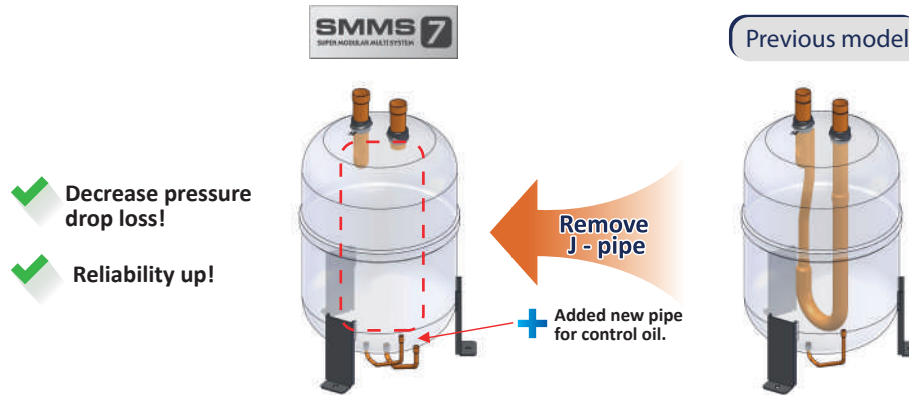

## New twin rotary compressor

Optimize the system as cooling only model and design new compressor for efficiency improving item.

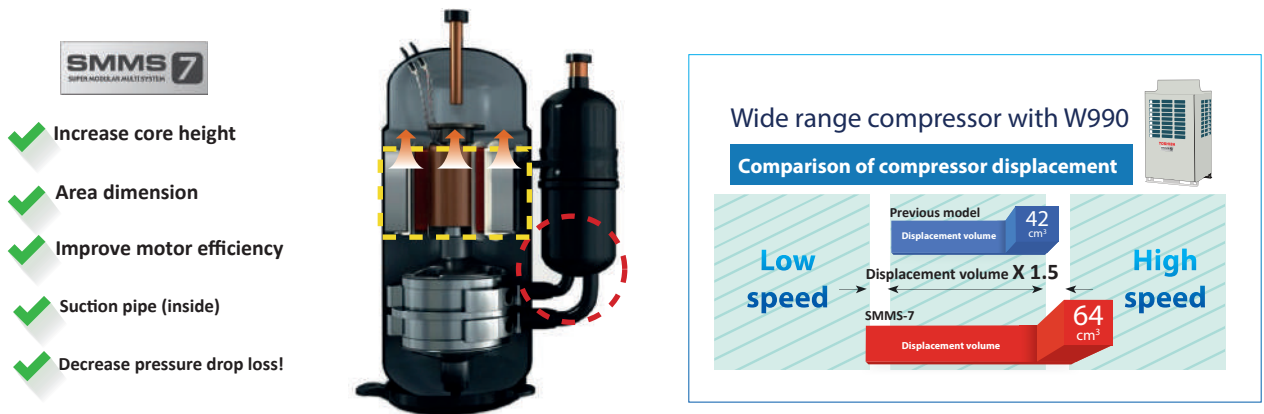







\*Need to be considered as a system for it connect directly oil level management

## Blade shapes for a better air flow management

Every single blade is designed with a unique profile, a solution that guarantees a smoother air flow without turbulences.




The new propeller deliver the same amount of air with less sound pressure level.

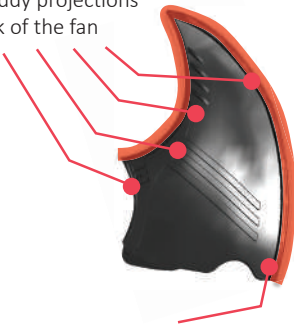

Each blade has a unique profile	Design improvements
<div style="display: flex; justify-content: space-around;"> <div style="text-align: center;"> <p><b>A</b></p>  </div> <div style="text-align: center;"> <p><b>B</b></p>  </div> </div> <div style="display: flex; justify-content: space-around; margin-top: 20px;"> <div style="text-align: center;"> <p><b>C</b></p>  </div> <div style="text-align: center;"> <p><b>D</b></p>  </div> </div>	<p>New anti-eddy projections on the back of the fan</p>  <p>New profiles of the reverse-arc shaped wings</p>



## Outdoor units

### Standard model

										
Capacity		8HP	10HP	12HP	14HP	16HP	18HP	20HP	22HP	24HP
Model Name (MMY-)	50 Hz	MAP0807T8P	MAP1007T8P	MAP1207T8P	MAP1407T8P	MAP1607T8P	MAP1807T8P	MAP2007T8P	MAP2207T8P	MAP2407T8P
	60 Hz	MAP0807T7P	MAP1007T7P	MAP1207T7P	MAP1407T7P	MAP1607T7P	MAP1807T7P	MAP2007T7P	MAP2207T7P	MAP2407T7P
Cooling capacity (kW)		22.4	28.0	33.5	40.0	45.0	50.4	56.0	61.5	67.0

															
Capacity		26HP		28HP		30HP		32HP		34HP		36HP		38HP	
Model Name (MMY-)	50 Hz	AP2617T8P		AP2817T8P		AP3017T8P		AP3217T8P		AP3417T8P		AP3617T8P		AP3817T8P	
	60 Hz	AP2617T7P		AP2817T7P		AP3017T7P		AP3217T7P		AP3417T7P		AP3617T7P		AP3817T7P	
Units in combination (MMY-)	MAP1407T8P	MAP1207T8P	MAP1407T8P	MAP1407T8P	MAP1607T8P	MAP1407T8P	MAP1607T8P	MAP1807T8P	MAP1607T8P	MAP1807T8P	MAP1807T8P	MAP2007T8P	MAP1807T8P	MAP2007T8P	MAP1807T8P
	MAP1407T7P	MAP1207T7P	MAP1407T7P	MAP1407T7P	MAP1607T7P	MAP1407T7P	MAP1607T7P	MAP1807T7P	MAP1607T7P	MAP1807T7P	MAP1807T7P	MAP2007T7P	MAP1807T7P	MAP2007T7P	MAP1807T7P
Cooling capacity (kW)		73.5		80.0		85.0		90.0		95.4		100.8		106.4	

																	
Capacity		40HP			42HP				44HP			46HP			48HP		
Model Name (MMY-)	50 Hz	AP4017T8P			AP4217T8P				AP4417T8P			AP4617T8P			AP4817T8P		
	60 Hz	AP4017T7P			AP4217T7P				AP4417T7P			AP4617T7P			AP4817T7P		
Units in combination (MMY-)	MAP2007T8P	MAP2007T8P	MAP1407T8P	MAP1407T8P	MAP1407T8P	MAP1607T8P	MAP1407T8P	MAP1407T8P	MAP1407T8P	MAP1807T8P	MAP1407T8P	MAP1407T8P	MAP2007T8P	MAP1407T8P	MAP1407T8P		
	MAP2007T7P	MAP2007T7P	MAP1407T7P	MAP1407T7P	MAP1407T7P	MAP1607T7P	MAP1407T7P	MAP1407T7P	MAP1407T7P	MAP1807T7P	MAP1407T7P	MAP1407T7P	MAP2007T7P	MAP1407T7P	MAP1407T7P		
Cooling capacity (kW)		112.0			120.0				125.0			130.4			136.0		

																			
Capacity		50HP			52HP			54HP			56HP			58HP			60HP		
Model Name (MMY-)	50 Hz	AP5017T8P			AP5217T8P			AP5417T8P			AP5617T8P			AP5817T8P			AP6017T8P		
	60 Hz	AP5017T7P			AP5217T7P			AP5417T7P			AP5617T7P			AP5817T7P			AP6017T7P		
Units in combination (MMY-)	MAP2007T8P	MAP1607T8P	MAP1407T8P	MAP2007T8P	MAP1807T8P	MAP1407T8P	MAP2007T8P	MAP2007T8P	MAP1407T8P	MAP2007T8P	MAP2007T8P	MAP1607T8P	MAP2007T8P	MAP2007T8P	MAP1807T8P	MAP2007T8P	MAP2007T8P	MAP2007T8P	
	MAP2007T7P	MAP1607T7P	MAP1407T7P	MAP2007T7P	MAP1807T7P	MAP1407T7P	MAP2007T7P	MAP2007T7P	MAP1407T7P	MAP2007T7P	MAP2007T7P	MAP1607T7P	MAP2007T7P	MAP2007T7P	MAP1807T7P	MAP2007T7P	MAP2007T7P	MAP2007T7P	
Cooling capacity (kW)		141.0			146.4			152.0			157.0			162.4			168.0		

\* Power: 3-phase 50 Hz 400V (380 - 415V) / 3-phase 60 Hz 380V  
 \* The source voltage must not fluctuate more than ±10%.  
 \* Rated conditions  
 Cooling: Indoor air temperature 27°C DB/19°C WB, outdoor air temperature 35°C DB

## High efficiency Model

Capacity		14HP		16HP		18HP		20HP		22HP		24HP		
Model Name (MMY-)	50 Hz	MAP14A7T8P		AP1627T8P		AP1827T8P		AP2027T8P		AP2227T8P		AP2427T8P		
	60 Hz	MAP14A7T7P		AP1627T7P		AP1827T7P		AP2027T7P		AP2227T7P		AP2427T7P		
Units in combination (MMY-)	-	-		MAP0807T8P	MAP0807T8P	MAP1007T8P	MAP0807T8P	MAP1007T8P	MAP1007T8P	MAP1207T8P	MAP1007T8P	MAP0807T8P	MAP0807T8P	MAP0807T8P
	-	-		MAP0807T7P	MAP0807T7P	MAP1007T7P	MAP0807T7P	MAP1007T7P	MAP1007T7P	MAP1207T7P	MAP1007T7P	MAP0807T7P	MAP0807T7P	MAP0807T7P
Cooling capacity (kW)		40.0		44.8		50.4		56.0		61.5		67.2		

Capacity		26HP		28HP		30HP			32HP		34HP			
Model Name (MMY-)	50 Hz	AP2627T8P		AP2827T8P		AP3027T8P			AP3227T8P		AP3427T8P			
	60 Hz	AP2627T7P		AP2827T7P		AP3027T7P			AP3227T7P		AP3427T7P			
Units in combination (MMY-)	-	MAP14A7T8P	MAP1207T8P	MAP14A7T8P	MAP14A7T8P	MAP1007T8P	MAP1007T8P	MAP1007T8P	MAP1207T8P	MAP1007T8P	MAP1007T8P	MAP1207T8P	MAP1207T8P	MAP1007T8P
	-	MAP14A7T7P	MAP1207T7P	MAP14A7T7P	MAP14A7T7P	MAP1007T7P	MAP1007T7P	MAP1007T7P	MAP1207T7P	MAP1007T7P	MAP1007T7P	MAP1207T7P	MAP1207T7P	MAP1007T7P
Cooling capacity (kW)		73.5		80.0		84.0			89.5		95.0			

Capacity		36HP			38HP			40HP			42HP		
Model Name (MMY-)	50 Hz	AP3627T8P			AP3827T8P			AP4027T8P			AP4227T8P		
	60 Hz	AP3627T7P			AP3827T7P			AP4027T7P			AP4227T7P		
Units in combination (MMY-)	-	MAP1207T8P	MAP1207T8P	MAP1207T8P	MAP14A7T8P	MAP1207T8P	MAP1207T8P	MAP14A7T8P	MAP14A7T8P	MAP1207T8P	MAP14A7T8P	MAP14A7T8P	MAP14A7T8P
	-	MAP1207T7P	MAP1207T7P	MAP1207T7P	MAP14A7T7P	MAP1207T7P	MAP1207T7P	MAP14A7T7P	MAP14A7T7P	MAP1207T7P	MAP14A7T7P	MAP14A7T7P	MAP14A7T7P
Cooling capacity (kW)		105.0			107.0			113.5			120.0		

Capacity		44HP			46HP			48HP			50HP			52HP			54HP		
Model Name (MMY-)	50 Hz	AP4427T8P			AP4627T8P			AP4827T8P			AP5027T8P			AP5227T8P			AP5427T8P		
	60 Hz	AP4427T7P			AP4627T7P			AP4827T7P			AP5027T7P			AP5227T7P			AP5427T7P		
Units in combination (MMY-)	-	MAP1607T8P	MAP14A7T8P	MAP14A7T8P	MAP1807T8P	MAP14A7T8P	MAP14A7T8P	MAP1607T8P	MAP1607T8P	MAP1807T8P	MAP1607T8P	MAP1607T8P	MAP1807T8P	MAP1807T8P	MAP1607T8P	MAP1807T8P	MAP1807T8P	MAP1807T8P	
	-	MAP1607T7P	MAP14A7T7P	MAP14A7T7P	MAP1807T7P	MAP14A7T7P	MAP14A7T7P	MAP1607T7P	MAP1607T7P	MAP1807T7P	MAP1607T7P	MAP1607T7P	MAP1807T7P	MAP1807T7P	MAP1607T7P	MAP1807T7P	MAP1807T7P	MAP1807T7P	
Cooling capacity (kW)		125.0			130.4			135.0			140.4			145.8			151.2		

	Y-shape branching joint				Branch headers				Outdoor unit connection piping kit			
Appearance												
Model name	RBM-BY55E	RBM-BY105E	RBM-BY205E	RBM-BY305E	RBM-HY1043E	RBM-HY2043E	RBM-HY1083E	RBM-HY2083E	RBM-BT14E		RBM-BT24E	
Usage (Classification according to indoor unit capacity code)	Total below 6.4	Total 6.4 or more and below 14.2	Total 14.2 or more and below 25.2	Total 25.2 or more	Max.4 branches		Max.8 branches		Total below 26.0		Total 26.0 or more	
					Total below 14.2	Total 14.2 or more and below 25.2	Total below 14.2	Total 14.2 or more and below 25.2				

\* Anti-Corrosion protection model : MMY-MAP\*\*\*\*T8JP, MMY-MAP\*\*\*\*T7JP

## Outdoor unit specifications

Standard model (Single unit)

Equivalent HP			8HP	10HP	12HP	14HP	16HP	
Model name	50Hz (MMY-)		MAP0807T8P	MAP1007T8P	MAP1207T8P	MAP1407T8P	MAP1607T8P	
	60Hz (MMY-)		MAP0807T7P	MAP1007T7P	MAP1207T7P	MAP1407T7P	MAP1607T7P	
Outdoor unit type			Inverter					
Power supply (*1)			3phase 4wires 50Hz 400V (380-415V)/3phase 4 wires 60Hz 380 Hz					
Cooling (*2)	Capacity 100%	(kW)	22.4	28.0	33.5	40.0	45.0	
		BTU(*2.1)	76,400	95,500	114,300	136,400	154,000	
		BTU(*2.2)	77,300	96,700	115,700	138,100	156,000	
	Power consumption	(kW)	4.65	6.57	8.38	11.4	12.5	
		EER (Energy Efficiency Ratio)	Capacity 100%	4.82	4.26	4.00	3.50	3.60
			Capacity 80%	5.79	5.31	5.04	4.32	4.32
	Capacity 50%	7.27	7.11	6.29	5.78	5.75		
External dimensions (Height / Width / Depth)			(mm) 1,800 / 990 / 780	1,800 / 990 / 780	1,800 / 990 / 780	1,800 / 990 / 780	1,800 / 1,210 / 780	
Total weight			(kg) 200	200	200	200	281	
Compressor	Motor output		(kW) 4.0 x 1	5.8 x 1	7.1 x 1	10.0 x 1	5.5 x 2	
	Motor output		(kW) 1.0	1.0	1.0	1.0	1.0	
Fan unit	Air volume		(m <sup>3</sup> /h) 9,700	9,700	12,200	12,200	12,600	
	Refrigerant piping	Main pipe diameter	Gas side (mm)	ø 19.1	ø 22.2	ø 28.6	ø 28.6	ø 28.6
		Liquid side (mm)	ø 12.7	ø 12.7	ø 12.7	ø 15.9	ø 15.9	
Sound pressure level			(dB(A)) 55	57	60	61	61	
Diversity*			200%	200%	200%	200%	200%	
Max.external static pressure			(Pa) 60	60	50	40	40	

Standard model (Single unit)

Equivalent HP			18HP	20HP	22HP	24HP	
Model name	50Hz (MMY-)		MAP1807T8P	MAP2007T8P	MAP2207T8P	MAP2407T8P	
	60Hz (MMY-)		MAP1807T7P	MAP2007T7P	MAP2207T7P	MAP2407T7P	
Outdoor unit type			Inverter				
Power supply (*1)			3phase 4wires 50Hz 400V (380-415V) / 3phase 4wires 60Hz 380V				
Cooling (*2)	Capacity 100%	(kW)	50.4	56.0	61.5	67.0	
		BTU(*2.1)	172,000	191,000	210,000	228,600	
		BTU(*2.2)	174,000	193,400	212,700	231,500	
	Power consumption	(kW)	14.8	17.4	18.6	22.9	
		EER (Energy Efficiency Ratio)	Capacity 100%	3.40	3.22	3.30	2.93
			Capacity 80%	4.15	3.93	4.00	3.67
	Capacity 50%	5.82	5.61	5.39	4.75		
External dimensions (Height / Width / Depth)			(mm) 1,800/1,210/780	1,800/1,210/780	1,800/1,600/780	1,800/1,600/780	
Total weight			(kg) 281	281	340	340	
Compressor	Motor output		(kW) 6.6 x 2	7.8 x 2	8.2 x 2	10.3 x 2	
	Motor output		(kW) 1.0	1.0	2.0	2.0	
Fan unit	Air volume		(m <sup>3</sup> /h) 12,600	12,600	18,500	18,500	
	Refrigerant piping	Main pipe diameter	Gas side (mm)	ø 28.6	ø 28.6	ø 28.6	ø 34.9
		Liquid side (mm)	ø 15.9	ø 15.9	ø 19.1	ø 19.1	
Sound pressure level			(dB(A)) 61	61	63	63	
Diversity*			200%	200%	200%	200%	
Max.external static pressure			(Pa) 40	40	40	40	

## Outdoor unit specifications

Standard model (Combination)

		Technical specifications								
Equivalent HP		26HP		28HP		30HP				
Model name	50Hz (MMY-)	AP2617T8P		AP2817T8P		AP3017T8P				
	60Hz (MMY-)	AP2617T7P		AP2817T7P		AP3017T7P				
Outdoor unit type		Inverter								
Power supply (*1)		3phase 4wires 50Hz 400V (380-415V) / 3phase 4wires 60Hz 380V								
Outdoor unit model	50Hz (MMY-)	MAP1407T8P	MAP1207T8P	MAP1407T8P	MAP1407T8P	MAP1607T8P	MAP1407T8P	MAP1407T8P		
	60Hz (MMY-)	MAP1407T7P	MAP1207T7P	MAP1407T7P	MAP1407T7P	MAP1607T7P	MAP1407T7P	MAP1407T7P		
Cooling (*2)	Capacity 100%	(kW)	73.5		80.0		85.0			
		BTU(*2.1)	250,700		272,800		290,400			
		BTU(*2.2)	253,900		276,300		294,100			
	Power consumption	(kW)	19.7		22.9		23.9			
		EER (Energy Efficiency Ratio)	Capacity 100%	3.73		3.50		3.55		
			Capacity 80%	4.63		4.32		4.33		
Capacity 50%	6.00		5.77		5.77					
Total weight	(kg)	200	200	200	200	281	200			
Compressor	Motor output	(kW)	10.0 x 1	7.1 x 1	10.0 x 1	10.0 x 1	5.5 x 2	10.0 x 1		
	Motor output	(kW)	1.0	1.0	1.0	1.0	1.0	1.0		
Fan unit	Air volume	(m <sup>3</sup> /h)	12,200	12,200	12,200	12,200	12,600	12,200		
	Refrigerant piping	Main pipe diameter	Gas side (mm)	ø 34.9		ø 34.9		ø 34.9		
Liquid side (mm)		ø 19.1		ø 19.1		ø 19.1				
Sound pressure level	(dB(A))	63.5		64.0		64.0				
Diversity*		180%		180%		180%				

Standard model (Combination)

		Technical specifications								
Equivalent HP		32HP		34HP		36HP				
Model name	50Hz (MMY-)	AP3217T8P		AP3417T8P		AP3617T8P				
	60Hz (MMY-)	AP3217T7P		AP3417T7P		AP3617T7P				
Outdoor unit type		Inverter								
Power supply (*1)		3phase 4wires 50Hz 400V (380-415V) / 3phase 4wires 60Hz 380V								
Outdoor unit model	50Hz (MMY-)	MAP1607T8P	MAP1607T8P	MAP1807T8P	MAP1607T8P	MAP1807T8P	MAP1807T8P	MAP1807T8P		
	60Hz (MMY-)	MAP1607T7P	MAP1607T7P	MAP1807T7P	MAP1607T7P	MAP1807T7P	MAP1807T7P	MAP1807T7P		
Cooling (*2)	Capacity 100%	(kW)	90.0		95.4		100.8			
		BTU(*2.1)	308,000		326,000		344,000			
		BTU(*2.2)	312,000		330,200		348,400			
	Power consumption	(kW)	25.0		27.3		29.6			
		EER (Energy Efficiency Ratio)	Capacity 100%	3.60		3.49		3.40		
			Capacity 80%	4.31		4.24		4.15		
Capacity 50%	5.76		5.79		5.79					
Total weight	(kg)	281	281	281	281	281	281			
Compressor	Motor output	(kW)	5.5 x 2	5.5 x 2	6.6 x 2	5.5 x 2	6.6 x 2	6.6 x 2		
	Motor output	(kW)	1.0	1.0	1.0	1.0	1.0	1.0		
Fan unit	Air volume	(m <sup>3</sup> /h)	12,600	12,600	12,600	12,600	12,600	12,600		
	Refrigerant piping	Main pipe diameter	Gas side (mm)	ø 34.9		ø 34.9		ø 41.3		
Liquid side (mm)		ø 19.1		ø 19.1		ø 22.2				
Sound pressure level	(dB(A))	64.0		64.0		64.0				
Diversity*		180%		180%		180%				

Notes: (\*1) Power: 3 phase 50 Hz 400 V (380 - 415 V) / 3 phase 60 Hz 380 V  
The source voltage must not fluctuate more than ± 10%

(\*2) Cooling:

(\*2.1) Indoor air temperature 27.0 °C DB/ 19.0 °C WB, outdoor air temperature 35.0 °C DB

(\*2.2) Indoor air temperature 27.0 °C DB/ 19.5 °C WB, outdoor air temperature 35.0 °C DB

Base on equivalent piping length of 7.5 m and piping height difference of 0 m

## Outdoor unit specifications

Standard model (Combination)

											Technical specifications		
Equivalent HP			38HP			40HP			42HP				
Model name	50Hz (MMY-)		AP3817T8P			AP4017T8P			AP4217T8P				
	60Hz (MMY-)		AP3817T7P			AP4017T7P			AP4217T7P				
Outdoor unit type			Inverter										
Power supply (*1)			3phase 4wires 50Hz 400V (380-415V) / 3phase 4wires 60Hz 380V										
Outdoor unit model	50Hz (MMY-)		MAP2007T8P	MAP1807T8P	MAP2007T8P	MAP2007T8P	MAP1407T8P	MAP1407T8P	MAP1407T8P	MAP1407T8P	MAP1407T8P		
	60Hz (MMY-)		MAP2007T7P	MAP1807T7P	MAP2007T7P	MAP2007T7P	MAP1407T7P	MAP1407T7P	MAP1407T7P	MAP1407T7P	MAP1407T7P		
Cooling (*2)	Capacity 100%	(kW)	106.4			112.0			120.0				
		BTU(*2.1)	364,000			382,000			401,000				
		BTU(*2.2)	368,700			386,900			406,200				
	Power consumption	(kW)	32.1			34.8			34.3				
		EER (Energy Efficiency Ratio)	Capacity 100%	3.31			3.22			3.50			
			Capacity 80%	4.03			3.91			4.32			
Capacity 50%	5.71			5.61			5.77						
Total weight			281	281	281	281	200	200	200	200			
Compressor	Motor output	(kW)	7.8 x 2	6.6 x 2	7.8 x 2	7.8 x 2	10.0 x 1	10.0 x 1	10.0 x 1	10.0 x 1			
		(kW)	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0			
Fan unit	Air volume	(m <sup>3</sup> /h)	12,600	12,600	12,600	12,600	12,200	12,200	12,200	12,200			
		Gas side (mm)	ø 41.3			ø 41.3			ø 41.3				
Refrigerant piping	Main pipe diameter	Liquid side (mm)	ø 22.2			ø 22.2			ø 22.2				
		(dB(A))	64.0			64.0			66.0				
Sound pressure level			64.0			64.0			66.0				
Diversity*			180%			180%			150%				

Standard model (Combination)

											Technical specifications		
Equivalent HP			44HP			46HP			48HP				
Model name	50Hz (MMY-)		AP4417T8P			AP4617T8P			AP4817T8P				
	60Hz (MMY-)		AP4417T7P			AP4617T7P			AP4817T7P				
Outdoor unit type			Inverter										
Power supply (*1)			3phase 4wires 50Hz 400V (380-415V) / 3phase 4wires 60Hz 380V										
Outdoor unit model	50Hz (MMY-)		MAP1607T8P	MAP1407T8P	MAP1407T8P	MAP1807T8P	MAP1407T8P	MAP1407T8P	MAP2007T8P	MAP1407T8P	MAP1407T8P		
	60Hz (MMY-)		MAP1607T7P	MAP1407T7P	MAP1407T7P	MAP1807T7P	MAP1407T7P	MAP1407T7P	MAP2007T7P	MAP1407T7P	MAP1407T7P		
Cooling (*2)	Capacity 100%	(kW)	125.0			130.4			136.0				
		BTU(*2.1)	420,000			444,400			462,000				
		BTU(*2.2)	425,400			450,100			468,000				
	Power consumption	(kW)	35.3			37.7			40.2				
		EER (Energy Efficiency Ratio)	Capacity 100%	3.54			3.46			3.38			
			Capacity 80%	4.33			4.26			4.15			
Capacity 50%	5.79			5.77			5.71						
Total weight			(kg)	281	200	200	281	200	200	281	200	200	
Compressor	Motor output	(kW)	5.5 x 2	10.0 x 1	10.0 x 1	6.6 x 2	10.0 x 1	10.0 x 1	7.8 x 2	10.0 x 1	10.0 x 1		
		(kW)	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0		
Fan unit	Air volume	(m <sup>3</sup> /h)	12,600	12,200	12,200	12,600	12,200	12,200	12,600	12,200	12,200		
		Gas side (mm)	ø 41.3			ø 41.3			ø 41.3				
Refrigerant piping	Main pipe diameter	Liquid side (mm)	ø 22.2			ø 22.2			ø 22.2				
		(dB(A))	66.0			66.0			66.0				
Sound pressure level			66.0			66.0			66.0				
Diversity*			150%			150%			150%				

Standard model (Combination)

Equivalent HP		50HP			52HP			54HP			
Model name	50Hz (MMY-)	AP5017T8P			AP5217T8P			AP5417T8P			
	60Hz (MMY-)	AP5017T7P			AP5217T7P			AP5417T7P			
Outdoor unit type		Inverter									
Power supply (*1)		3phase 4wires 50Hz 400V (380-415V) / 3phase 4wires 60Hz 380V									
Outdoor unit model	50Hz (MMY-)	MAP2007T8P	MAP1607T8P	MAP1407T8P	MAP2007T8P	MAP1807T8P	MAP1407T8P	MAP2007T8P	MAP2007T8P	MAP1407T8P	
	60Hz (MMY-)	MAP2007T7P	MAP1607T7P	MAP1407T7P	MAP2007T7P	MAP1807T7P	MAP1407T7P	MAP2007T7P	MAP2007T7P	MAP1407T7P	
Cooling (*2)	Capacity 100%	(kW)	141.0			146.4			152.0		
		BTU(*2.1)	480,000			498,000			516,000		
		BTU(*2.2)	486,200			504,400			522,700		
	Power consumption	(kW)	41.2			43.6			46.2		
		Capacity 100%	3.42			3.36			3.29		
		Capacity 80%	4.15			4.09			4.01		
EER (Energy Efficiency Ratio)	Capacity 50%	5.69			5.72			5.67			
	Total weight (kg)	281	281	200	281	281	200	281	281	200	
Compressor	Motor output (kW)	7.8 x 2	5.5 x 2	10.0 x 1	7.8 x 2	6.6 x 2	10.0 x 1	7.8 x 2	7.8 x 2	10.0 x 1	
	Motor output (kW)	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	
Fan unit	Air volume (m <sup>3</sup> /h)	12,600	12,600	12,200	12,600	12,600	12,200	12,600	12,600	12,200	
	Refrigerant piping	Main pipe diameter	Gas side (mm)	ø 41.3			ø 41.3			ø 41.3	
Liquid side (mm)			ø 22.2			ø 22.2			ø 22.2		
Sound pressure level (dB(A))		66.0			66.0			66.0			
Diversity*		150%			150%			150%			

Standard model (Combination)

Equivalent HP		56HP			58HP			60HP			
Model name	50Hz (MMY-)	AP5617T8P			AP5817T8P			AP6017T8P			
	60Hz (MMY-)	AP5617T7P			AP5817T7P			AP6017T7P			
Outdoor unit type		Inverter									
Power supply (*1)		3phase 4wires 50Hz 400V (380-415V) / 3phase 4wires 60Hz 380V									
Outdoor unit model	50Hz (MMY-)	MAP2007T8P	MAP2007T8P	MAP1607T8P	MAP2007T8P	MAP2007T8P	MAP1807T8P	MAP2007T8P	MAP2007T8P	MAP2007T8P	
	60Hz (MMY-)	MAP2007T7P	MAP2007T7P	MAP1607T7P	MAP2007T7P	MAP2007T7P	MAP1807T7P	MAP2007T7P	MAP2007T7P	MAP2007T7P	
Cooling (*2)	Capacity 100%	(kW)	157.0			162.4			168.0		
		BTU(*2.1)	535,000			554,000			574,000		
		BTU(*2.2)	541,900			561,200			581,400		
	Power consumption	(kW)	47.1			49.5			52.2		
		Capacity 100%	3.33			3.28			3.22		
		Capacity 80%	4.03			3.98			3.92		
EER (Energy Efficiency Ratio)	Capacity 50%	5.65			5.68			5.60			
	Total weight (kg)	281	281	281	281	281	281	281	281	281	
Compressor	Motor output (kW)	7.8 x 2	7.8 x 2	5.5 x 2	7.8 x 2	7.8 x 2	6.6 x 2	7.8 x 2	7.8 x 2	7.8 x 2	
	Motor output (kW)	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	
Fan unit	Air volume (m <sup>3</sup> /h)	12,600	12,600	12,600	12,600	12,600	12,600	12,600	12,600	12,600	
	Refrigerant piping	Main pipe diameter	Gas side (mm)	ø 41.3			ø 41.3			ø 41.3	
Liquid side (mm)			ø 22.2			ø 22.2			ø 22.2		
Sound pressure level (dB(A))		66.0			66.0			66.0			
Diversity*		150%			150%			150%			

Notes: (\*1) Power: 3 phase 50 Hz 400 V (380 - 415 V) / 3 phase 60 Hz 380 V  
The source voltage must not fluctuate more than ± 10%

(\*2) Cooling:

(\*2.1) Indoor air temperature 27.0 °C DB/ 19.0 °C WB, outdoor air temperature 35.0 °C DB

(\*2.2) Indoor air temperature 27.0 °C DB/ 19.5 °C WB, outdoor air temperature 35.0 °C DB

Base on equivalent piping length of 7.5 m and piping height difference of 0 m

## Outdoor unit specifications

High efficiency model (Single unit/Combination)

Equivalent HP			14HP	16HP	18HP		
Model name	50Hz (MMY-)	MAP14A7T8P	MAP14A7T8P	AP1627T8P	AP1827T8P		
	60Hz (MMY-)	MAP14A7T7P	MAP14A7T7P	AP1627T7P	AP1827T7P		
Outdoor unit type			Inverter				
Power supply (*1)			3phase 4wires 50Hz 400V (380-415V) / 3phase 4wires 60Hz 380V				
Outdoor unit model	50Hz (MMY-)	MAP14A7T8P	MAP0807T8P	MAP0807T8P	MAP1007T8P	MAP0807T8P	
	60Hz (MMY-)	MAP14A7T7P	MAP0807T7P	MAP0807T7P	MAP1007T7P	MAP0807T7P	
Cooling (*2)	Capacity 100%	(kW)	40.0	44.8	50.4		
		BTU(*2.1)	136,400	154,000	172,000		
		BTU(*2.2)	138,100	156,000	174,200		
	Power consumption	(kW)	10.4	9.29	11.2		
		EER (Energy Efficiency Ratio)	Capacity 100%	3.85	4.82	4.51	
			Capacity 80%	4.58	5.79	5.51	
Capacity 50%	5.92		7.27	7.18			
External dimensions (Height / Width / Depth)		(mm)	1,800 / 1,210 / 780	1,800 / 990 / 780	1,800 / 990 / 780	1,800 / 990 / 780	
Total weight		(kg)	281	200	200	200	
Compressor	Motor output	(kW)	4.6 x 2	4.0 x 1	4.0 x 1	5.8x1	4.0x1
	Motor output	(kW)	1.0	1.0	1.0	1.0	1.0
Fan unit	Motor output	(kW)	1.0	1.0	1.0	1.0	1.0
	Air volume	(m <sup>3</sup> /h)	12,200	9,700	9,700	9,700	9,700
Refrigerant piping	Main pipe diameter	Gas side (mm)	ø 28.6	ø 28.6	ø 28.6	ø 28.6	
		Liquid side (mm)	ø 15.9	ø 15.9	ø 15.9	ø 15.9	
Sound pressure level		(dB(A))	60	58.0	59.5	59.5	
Diversity <sup>†</sup>			200%	180%	180%	180%	
Max.external static pressure		(Pa)	50				

High efficiency model (Combination)

Equivalent HP			20HP	22HP	24HP				
Model name	50Hz (MMY-)	AP2027T8P	AP2027T8P	AP2227T8P	AP2427T8P				
	60Hz (MMY-)	AP2027T7P	AP2027T7P	AP2227T7P	AP2427T7P				
Outdoor unit type			Inverter						
Power supply (*1)			3phase 4wires 50Hz 400V (380-415V) / 3phase 4wires 60Hz 380V						
Outdoor unit model	50Hz (MMY-)	MAP1007T8P	MAP1007T8P	MAP1207T8P	MAP1007T8P	MAP0807T8P	MAP0807T8P	MAP0807T8P	
	60Hz (MMY-)	MAP1007T7P	MAP1007T7P	MAP1207T7P	MAP1007T7P	MAP0807T7P	MAP0807T7P	MAP0807T7P	
Cooling (*2)	Capacity 100%	(kW)	56.0	61.5	67.2				
		BTU(*2.1)	191,000	209,800	228,600				
		BTU(*2.2)	193,400	212,500	231,500				
	Power consumption	(kW)	13.1	14.9	13.9				
		EER (Energy Efficiency Ratio)	Capacity 100%	4.26	4.12	4.82			
			Capacity 80%	5.31	5.16	5.80			
Capacity 50%	7.11		6.64	7.27					
External dimensions (Height / Width / Depth)		(mm)	1,800/990/780	1,800/990/780	1,800/990/780	1,800/990/780	1,800/990/780	1,800/990/780	
Total weight		(kg)	200	200	200	200	200	200	
Compressor	Motor output	(kW)	5.8 x 1	5.8 x 1	7.1 x 1	5.8 x 1	4.0 x 1	4.0 x 1	4.0 x 1
	Motor output	(kW)	1.0	1.0	1.0	1.0	1.0	1.0	
Fan unit	Motor output	(kW)	1.0	1.0	1.0	1.0	1.0	1.0	
	Air volume	(m <sup>3</sup> /h)	9,700	9,700	12,200	9,700	9,700	9,700	
Refrigerant piping	Main pipe diameter	Gas side (mm)	ø 28.6	ø 28.6	ø 28.6	ø 34.9			
		Liquid side (mm)	ø 15.9	ø 19.1	ø 19.1	ø 19.1			
Sound pressure level		(dB(A))	60.0	62.0	60.0	60.0			
Diversity <sup>†</sup>			180%	180%	180%	150%			



## Outdoor unit specifications

High efficiency model (Combination)

Equivalent HP		26HP			28HP			30HP				
Model name	50Hz (MMY-)	AP2627T8P			AP2827T8P			AP3027T8P				
	60Hz (MMY-)	AP2627T7P			AP2827T7P			AP3027T7P				
Outdoor unit type		Inverter										
Power supply (*1)		3phase 4wires 50Hz 400V (380-415V) / 3phase 4wires 60Hz 380V										
Outdoor unit model	50Hz (MMY-)	MAP14A7T8P	MAP1207T8P	MAP14A7T8P	MAP14A7T8P	MAP1007T8P	MAP1007T8P	MAP1007T8P	MAP1007T8P	MAP1007T8P		
	60Hz (MMY-)	MAP14A7T7P	MAP1207T7P	MAP14A7T7P	MAP14A7T7P	MAP1007T7P	MAP1007T7P	MAP1007T7P	MAP1007T7P	MAP1007T7P		
Cooling (*2)	Capacity 100%	(kW)	73.5			80.0			84.0			
		BTU(*2.1)	250,700			272,800			290,400			
		BTU(*2.2)	253,900			276,300			294,100			
	Power consumption	(kW)	18.8			20.8			19.7			
		EER (Energy Efficiency Ratio)	Capacity 100%	3.92			3.85			4.26		
			Capacity 80%	4.78			4.57			5.29		
Capacity 50%	6.08			5.93			7.09					
External dimensions (Height / Width / Depth)		(mm)	1,800 / 1,210 / 780	1,800 / 990 / 780	1,800 / 1,210 / 780	1,800 / 1,210 / 780	1,800 / 990 / 780	1,800 / 990 / 780	1,800 / 990 / 780	1,800 / 990 / 780		
Total weight		(kg)	281	200	281	281	200	200	200	200		
Compressor	Motor output	(kW)	4.6 x 2	7.1 x 1	4.6 x 2	4.6 x 2	5.8 x 1	5.8 x 1	5.8 x 1	5.8 x 1		
	Motor output	(kW)	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0		
Fan unit	Motor output	(kW)	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0		
	Air volume	(m <sup>3</sup> /h)	12,200	12,200	12,200	12,200	9,700	9,700	9,700	9,700		
Refrigerant piping	Main pipe diameter	Gas side (mm)	ø 34.9			ø 34.9			ø 34.9			
		Liquid side (mm)	ø 19.1			ø 19.1			ø 19.1			
Sound pressure level		(dB(A))	63.0			63			62.0			
Diversity*			180%			180%			150%			

High efficiency model (Combination)

Equivalent HP		32HP			34HP			36HP				
Model name	50Hz (MMY-)	AP3227T8P			AP3427T8P			AP3627T8P				
	60Hz (MMY-)	AP3227T7P			AP3427T7P			AP3627T7P				
Outdoor unit type		Inverter										
Power supply (*1)		3phase 4wires 50Hz 400V (380-415V) / 3phase 4wires 60Hz 380V										
Outdoor unit model	50Hz (MMY-)	MAP1207T8P	MAP1007T8P	MAP1007T8P	MAP1207T8P	MAP1207T8P	MAP1007T8P	MAP1207T8P	MAP1207T8P	MAP1207T8P		
	60Hz (MMY-)	MAP1207T7P	MAP1007T7P	MAP1007T7P	MAP1207T7P	MAP1207T7P	MAP1007T7P	MAP1207T7P	MAP1207T7P	MAP1207T7P		
Cooling (*2)	Capacity 100%	(kW)	89.5			95.0			100.5			
		BTU(*2.1)	308,000			326,000			342,900			
		BTU(*2.2)	312,000			330,200			347,300			
	Power consumption	(kW)	21.5			23.3			25.1			
		EER (Energy Efficiency Ratio)	Capacity 100%	4.16			4.08			4.00		
			Capacity 80%	5.19			5.10			5.03		
Capacity 50%	6.78			6.50			6.28					
External dimensions (Height / Width / Depth)		(mm)	1,800/990/780	1,800/990/780	1,800/990/780	1,800/990/780	1,800/990/780	1,800/990/780	1,800/990/780	1,800/990/780		
Total weight		(kg)	200	200	200	200	200	200	200	200		
Compressor	Motor output	(kW)	7.1 x 1	5.8 x 1	5.8 x 1	7.1 x 1	7.1 x 1	5.8 x 1	7.1 x 1	7.1 x 1		
	Motor output	(kW)	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0		
Fan unit	Motor output	(kW)	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0		
	Air volume	(m <sup>3</sup> /h)	12,200	9,700	9,700	12,200	12,200	9,700	12,200	12,200		
Refrigerant piping	Main pipe diameter	Gas side (mm)	ø 34.9			ø 34.9			ø 41.3			
		Liquid side (mm)	ø 19.1			ø 19.1			ø 22.2			
Sound pressure level		(dB(A))	63.0			64.0			65.0			
Diversity*			150%			150%			150%			

Notes: (\*1) Power: 3 phase 50 Hz 400 V (380 - 415 V) / 3 phase 60 Hz 380 V

The source voltage must not fluctuate more than ± 10%

(\*2) Cooling:

(\*2.1) Indoor air temperature 27.0°C DB/ 19.0°C WB, outdoor air temperature 35.0°C DB

(\*2.2) Indoor air temperature 27.0°C DB/ 19.5°C WB, outdoor air temperature 35.0°C DB

Base on equivalent piping length of 7.5 m and piping height difference of 0 m

## Outdoor unit specifications

High efficiency model (Combination)

Equivalent HP			38HP			40HP			42HP			
Model name	50Hz (MMY-)		AP3827T8P			AP4027T8P			AP4217T8P			
	60Hz (MMY-)		AP3827T7P			AP4027T7P			AP4217T7P			
Outdoor unit type			Inverter									
Power supply (*1)			3phase 4wires 50Hz 400V (380-415V) / 3phase 4wires 60Hz 380V									
Outdoor unit model	50Hz (MMY-)		MAP14A7T8P	MAP1207T8P	MAP1207T8P	MAP14A7T8P	MAP14A7T8P	MAP1207T8P	MAP14A7T8P	MAP14A7T8P	MAP14A7T8P	
	60Hz (MMY-)		MAP14A7T7P	MAP1207T7P	MAP1207T7P	MAP14A7T7P	MAP14A7T7P	MAP1207T7P	MAP14A7T7P	MAP14A7T7P	MAP14A7T7P	
Cooling (*2)	Capacity 100%	(kW)	107.0			113.5			120.0			
		BTU(*2.1)	365,000			387,100			409,200			
		BTU(*2.2)	369,700			392,100			414,500			
	Power consumption	(kW)	27.2			29.1			31.2			
		EER (Energy Efficiency Ratio)	Capacity 100%	3.94			3.90			3.85		
			Capacity 80%	4.86			4.70			4.57		
	Capacity 50%	6.14			6.03			5.94				
External dimensions (Height / Width / Depth)		(mm)	1,800/1,210/780	1,800/990/780	1,800/990/780	1,800/1,210/780	1,800/1,210/780	1,800/990/780	1,800/1,210/780	1,800/1,210/780	1,800/1,210/780	
Total weight		(kg)	281	200	200	281	281	200	281	281	281	
Compressor	Motor output		(kW)	4.6 x 2	7.1 x 1	7.1 x 1	4.6 x 2	4.6 x 2	7.1 x 2	4.6 x 2	4.6 x 2	
	Motor output		(kW)	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	
Fan unit	Air volume		(m <sup>3</sup> /h)	12,200	12,200	12,200	12,200	12,200	12,200	12,200	12,200	
	Refrigerant piping	Main pipe diameter	Gas side (mm)	ø 41.3			ø 41.3			ø 41.3		
Liquid side (mm)			ø 22.2			ø 22.2			ø 22.2			
Sound pressure level		(dB(A))	65.0			65.0			65.0			
Diversity <sup>†</sup>			150%			150%			150%			

High efficiency model (Combination)

Equivalent HP			44HP			46HP			48HP			
Model name	50Hz (MMY-)		AP4427T8P			AP4627T8P			AP4827T8P			
	60Hz (MMY-)		AP4427T7P			AP4627T7P			AP4827T7P			
Outdoor unit type			Inverter									
Power supply (*1)			3phase 4wires 50Hz 400V (380-415V) / 3phase 4wires 60Hz 380V									
Outdoor unit model	50Hz (MMY-)		MAP1607T8P	MAP14A7T8P	MAP14A7T8P	MAP1807T8P	MAP14A7T8P	MAP14A7T8P	MAP1607T8P	MAP1607T8P	MAP1607T8P	
	60Hz (MMY-)		MAP1607T7P	MAP14A7T7P	MAP14A7T7P	MAP1807T7P	MAP14A7T7P	MAP14A7T7P	MAP1607T7P	MAP1607T7P	MAP1607T7P	
Cooling (*2)	Capacity 100%	(kW)	125.0			130.4			135.0			
		BTU(*2.1)	426,800			444,400			462,000			
		BTU(*2.2)	432,300			450,100			468,000			
	Power consumption	(kW)	33.2			35.5			37.5			
		EER (Energy Efficiency Ratio)	Capacity 100%	3.76			3.67			3.60		
			Capacity 80%	4.48			4.40			4.32		
	Capacity 50%	5.84			5.87			5.77				
External dimensions (Height / Width / Depth)		(mm)	1,800/1,210/780	1,800/1,210/780	1,800/1,210/780	1,800/1,210/780	1,800/1,210/780	1,800/1,210/780	1,800/1,210/780	1,800/1,210/780	1,800/1,210/780	
Total weight		(kg)	281	281	281	281	281	281	281	281	281	
Compressor	Motor output		(kW)	5.5 x 2	4.6 x 2	4.6 x 2	6.6 x 2	4.6 x 2	4.6 x 2	5.5 x 2	5.5 x 2	
	Motor output		(kW)	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	
Fan unit	Air volume		(m <sup>3</sup> /h)	12,600	12,200	12,200	12,600	12,200	12,200	12,600	12,600	
	Refrigerant piping	Main pipe diameter	Gas side (mm)	ø 41.3			ø 41.3			ø 41.3		
Liquid side (mm)			ø 22.2			ø 22.2			ø 22.2			
Sound pressure level		(dB(A))	65.5			65.5			66.0			
Diversity <sup>†</sup>			150%			150%			150%			

## Outdoor unit specifications

High efficiency model (Combination)

Equivalent HP		50HP			52HP			54HP				
Model name	50Hz (MMY-)	AP5027T8P			AP5227T8P			AP5427T8P				
	60Hz (MMY-)	AP5027T7P			AP5227T7P			AP5427T7P				
Outdoor unit type	Inverter											
Power supply (*1)	3phase 4wires 50Hz 400V (380-415V) / 3phase 4wires 60Hz 380V											
Outdoor unit model	50Hz (MMY-)	MAP1807T8P	MAP1607T8P	MAP1607T8P	MAP1807T8P	MAP1807T8P	MAP1607T8P	MAP1807T8P	MAP1807T8P	MAP1807T8P		
	60Hz (MMY-)	MAP1807T7P	MAP1607T7P	MAP1607T7P	MAP1807T7P	MAP1807T7P	MAP1607T7P	MAP1807T7P	MAP1807T7P	MAP1807T7P		
Cooling (*2)	Capacity 100%	(kW)	140.4			145.8			151.2			
		BTU(*2.1)	480,000			498,000			516,000			
		BTU(*2.2)	486,200			504,400			522,700			
	Power consumption	(kW)	39.8			42.1			44.5			
		EER (Energy Efficiency Ratio)	Capacity 100%	3.53			3.46			3.40		
			Capacity 80%	4.25			4.19			4.16		
Capacity 50%	5.80			5.79			5.82					
External dimensions (Height / Width / Depth)	(mm)	1,800/1,210/780	1,800/1,210/780	1,800/1,210/780	1,800/1,210/780	1,800/1,210/780	1,800/1,210/780	1,800/1,210/780	1,800/1,210/780	1,800/1,210/780		
Total weight	(kg)	281	281	281	281	281	281	281	281	281		
Compressor	Motor output (kW)	6.6 x 2	5.5 x 2	5.5 x 2	6.6x 2	6.6 x 2	5.5 x 2	6.6 x 2	6.6 x 2	6.6 x 2		
Fan unit	Motor output (kW)	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0		
	Air volume (m <sup>3</sup> /h)	12,600	12,600	12,600	12,600	12,600	12,600	12,600	12,600	12,600		
Refrigerant piping	Main pipe diameter	Gas side (mm)	ø 41.3			ø 41.3			ø 41.3			
		Liquid side (mm)	ø 22.2			ø 22.2			ø 22.2			
Sound pressure level	(dB(A))	66.0			66.0			66.0				
Diversity*		150%			150%			150%				

Notes: (\*1) Power: 3 phase 50 Hz 400 V (380 - 415 V) / 3 phase 60 Hz 380 V  
The source voltage must not fluctuate more than ± 10%

(\*2) Cooling:

(\*2.1) Indoor air temperature 27.0°C DB/ 19.0 °C WB, outdoor air temperature 35.0 °C DB




(\*2.2) Indoor air temperature 27.0°C DB/ 19.5 °C WB, outdoor air temperature 35.0 °C DB

Base on equivalent piping length of 7.5 m and piping height difference of 0 m

Outdoor units external drawings

**Model : MMY-MAP0807T7P, MMY-MAP0807T8P  
 MMY-MAP1007T7P, MMY-MAP1007T8P  
 MMY-MAP1207T7P, MMY-MAP1207T8P  
 MMY-MAP1407T7P, MMY-MAP1407T8P**

Model Name	⊠A	Model Name	⊠B
MAP0807 type	⊠19.1	MAP0807 type	⊠12.7
MAP1007 type	⊠22.2	MAP1007 type	⊠12.7
MAP1207 type	⊠28.6	MAP1207 type	⊠12.7
MAP1407 type	⊠28.6	MAP1407 type	⊠15.9

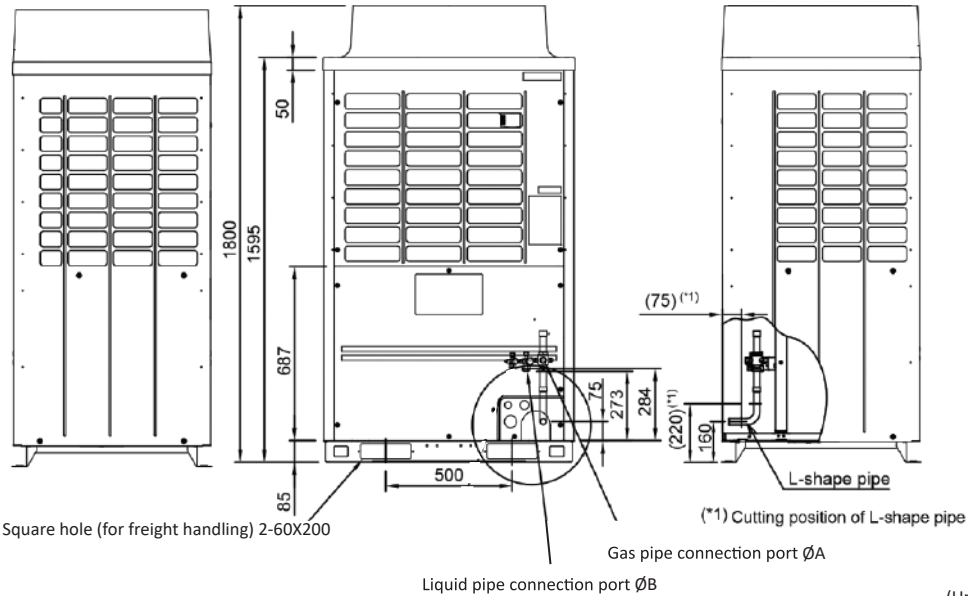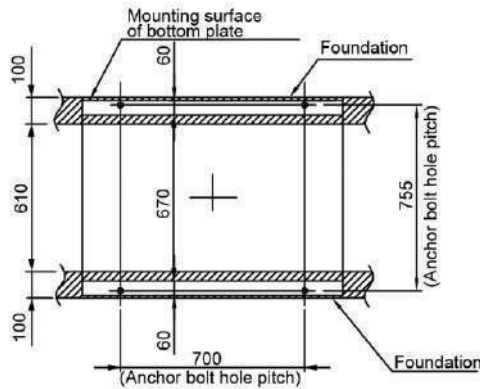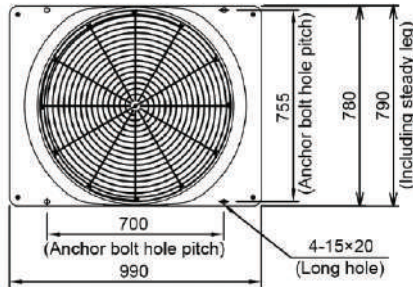


(Note)

1. IF there is an obstacle at the upper side of the outdoor unit, set the top end of the outdoor unit 2000mm apart from the obstacle
2. Limit the height of the obstacle surrounding the outdoor unit to 800mm or less from the bottom end of the outdoor unit.
3. Draw out the pipe procured locally to the front of the outdoor unit horizontally and keep 500mm or more between the outdoor unit and traversing pipe if placing pipe transversely.
4. Dimensional drawing of corrosion heavy protection model is the same as that of standard model.

(Unit:mm)

**Model : MMY-MAP14A7T8P, MMY-MAP14A7T7P**  
**MMY-MAP1607T8P, MMY-MAP1607T7P**  
**MMY-MAP1807T8P, MMY-MAP1807T7P**  
**MMY-MAP2007T8P, MMY-MAP2007T7P**





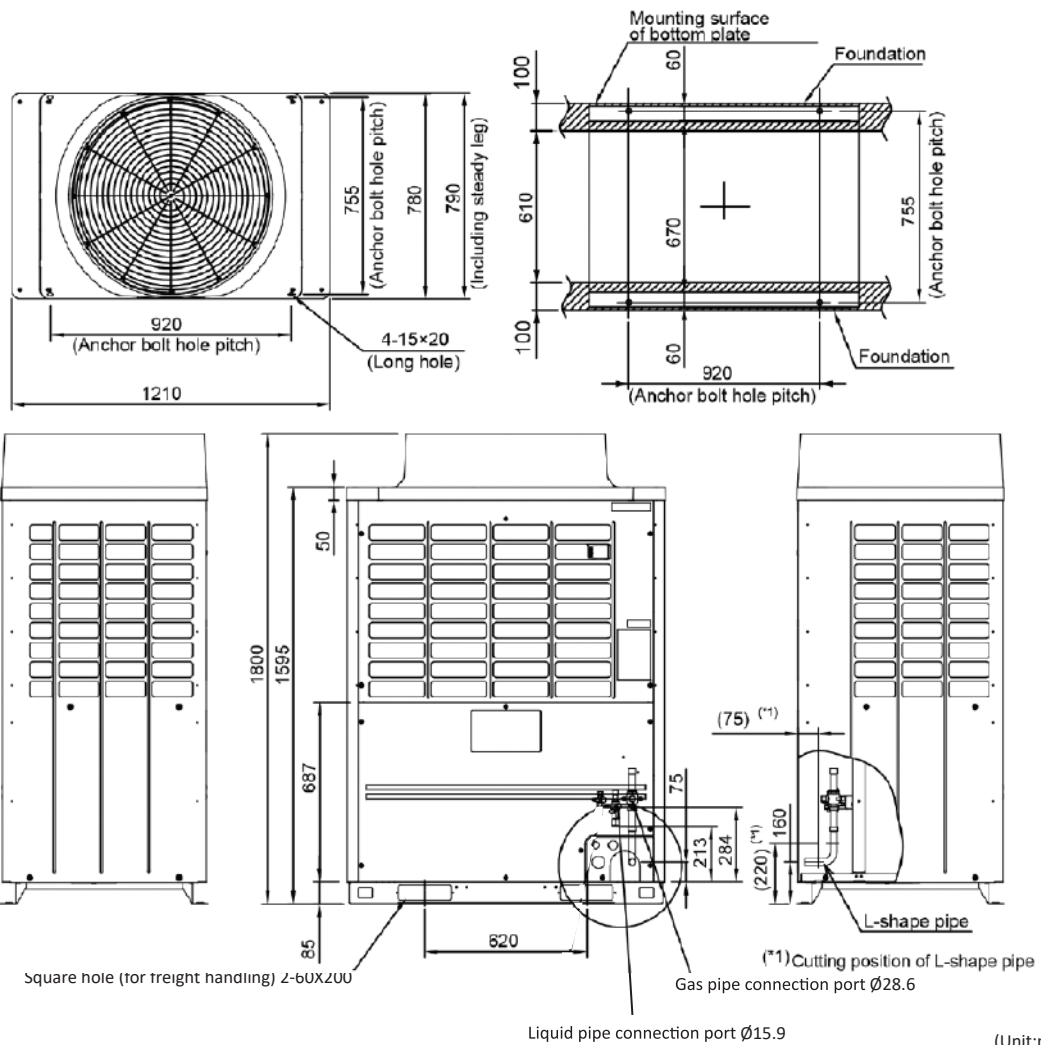


(Note)

1. IF there is an obstacle at the upper side of the outdoor unit, set the top end of the outdoor unit 2000mm apart from the obstacle
2. Limit the height of the obstacle surrounding the outdoor unit to 800mm or less from the bottom end of the outdoor unit.
3. Draw out the pipe procured locally to the front of the outdoor unit horizontally and keep 500mm or more between the outdoor unit and traversing pipe if placing pipe transversely.
4. Dimensional drawing of corrosion heavy protection model is the same as that of standard model.

**Model : MMY-MAP2207T8P, MMY-MAP2207T7P  
MMY-MAP2407T8P, MMY-MAP2407T7P**

Model Name	ØA
MMY-MAP2207T8P	Ø28.6
MMY-MAP2407T8P	Ø34.9

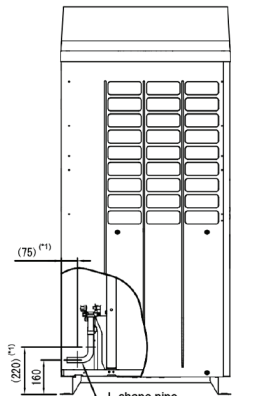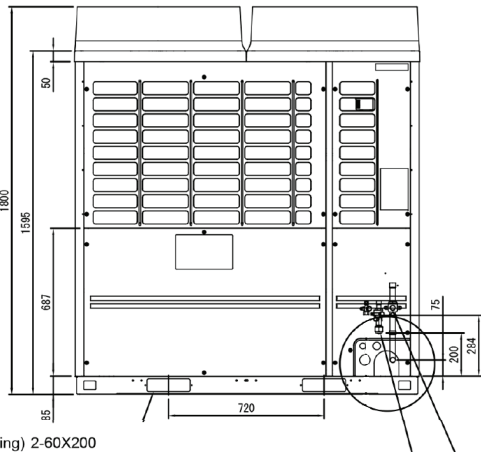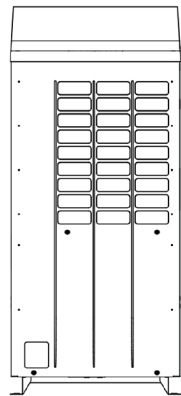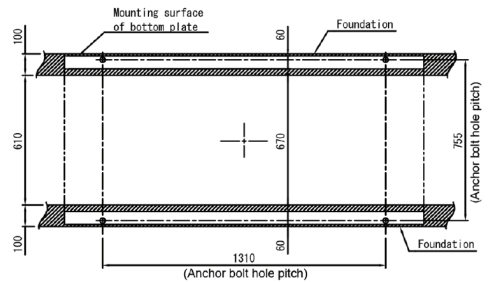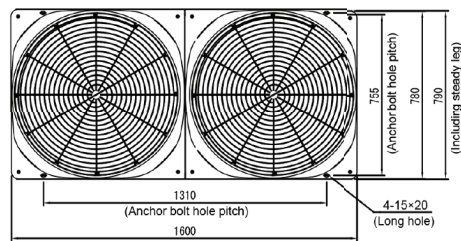

Square hole (for freight handling) 2-60X200

(\*1) Cutting position of L-shape pipe

Gas pipe connection port ØA

Liquid pipe connection port 19.1

(Note)

1. If there is an obstacle at the upper side of the outdoor unit, set the top end of the outdoor unit 2000mm apart from the obstacle.
2. Limit the height of the obstacle surrounding the outdoor unit to 800mm or less from the bottom end of the outdoor unit.
3. Draw out the pipe procured locally to the front of the outdoor unit horizontally, and keep 500mm or more between the outdoor unit and traversing pipe if placing pipe transversely.
4. Dimensional drawing of corrosion heavy protection model is the same as that of standard model.

(Unit:mm)

MINI-SMMS 7

"SMMS -7 the senses of cooling"



**Air Conditioning for small and medium-size building**





**MiNi-SMMS 7****Luxury through flexibility and technology**

Toshiba new advanced single fan MiNi-SMMS 7 will deliver the ultimate in cooling comfort. The very latest air conditioning technology ensures optimal performance greatly for the quality of your life.

**Small unit but huge advantages**

Toshiba MiNi-SMMS 7 exterior units are lightweight and compact. An outdoor unit takes up only little space on the wall or yard. It makes the exterior of building look neat & modern with quieter operation.

**Benefits of the Toshiba MiNi-SMMS 7 flexibility**

One external condenser can serve up to six interior units for excellent flexibility, cost-effectiveness, and high reliability



## Space saving and light weight *Space*

Space saving and light weight chassis provides the optimal solution for limited installation space like a condominium with limited balcony, hotel, small office and small shop.

Inside view of a condominium



Optimized cooling  
MiNi-SMMS 7  
4HP/5HP/6HP

**NEW**

Light weight  
**74kg**




Outside view of a condominium




## Wider ambient operation *Endurance*

MiNi-SMMS 7 is designed to well and smoothly operate at higher ambient temperature up to 50°C DB , this 50°C DB is the wider cooling operation range. which Toshiba tested to ensure the products keep high reliability.

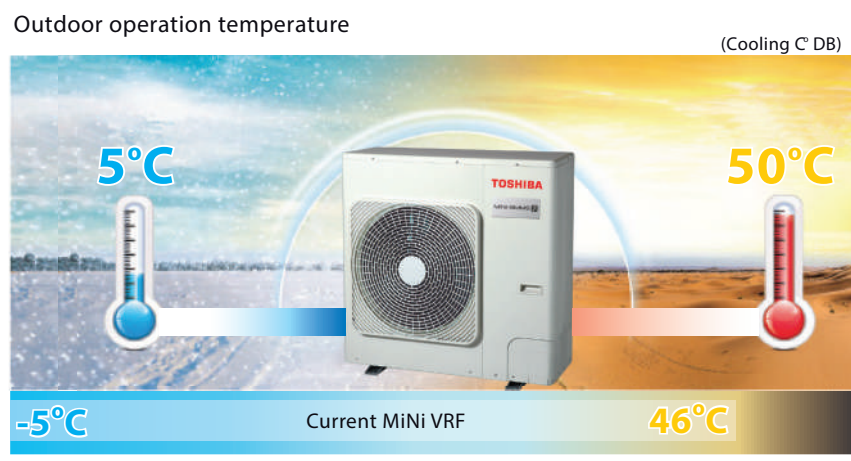


Normal condition: discharge hot air is blown out.

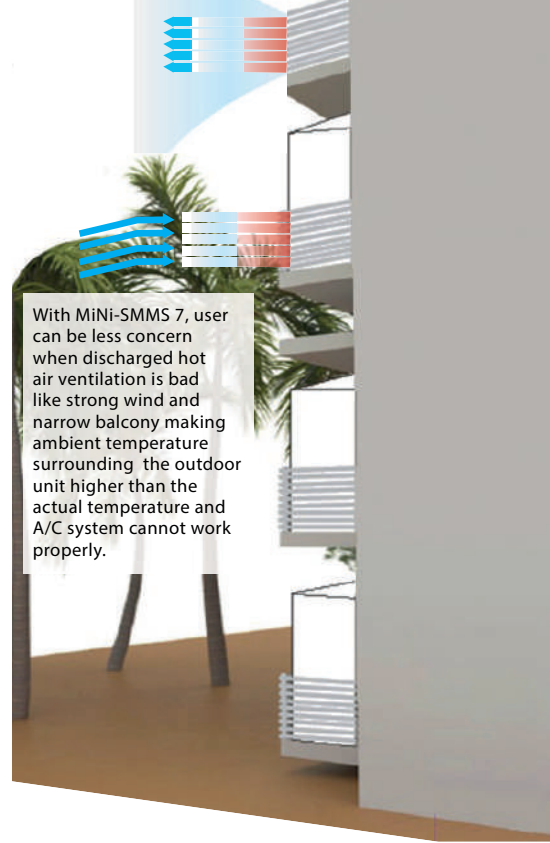

## Higher energy efficiency *Efficiency*

Part load EER is our great advantage, A/C system in residential and small office applications is mostly operated at part load condition. MiNi-SMMS 7 with high energy efficiency can help customers save power consumption and their money.

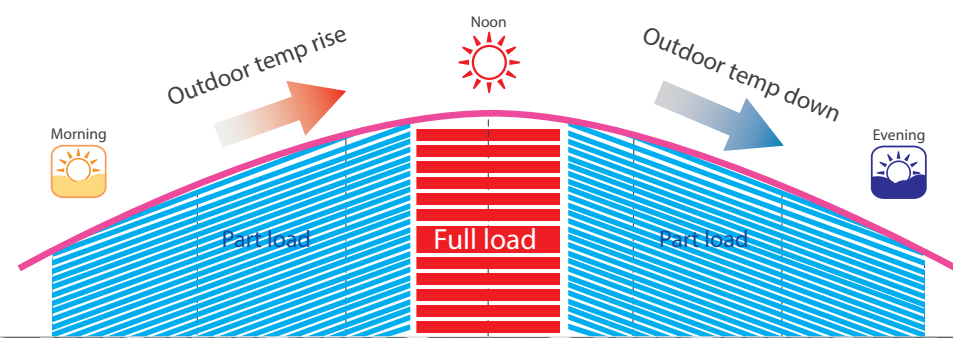

**Design flexibility** *Flexibility*

MiNi-SMMS 7 provides high flexibility in design due to wide range of indoor unit choices, this helps expanding interior design ideas, opening the door to stylish and elegant life style.



Connectable up to 6 indoor units for exceptional flexibility, luxury and well-designed.


**High reliability** *Strength*

**Small animal protection**

To prevent the small animals from entering and interfering with the electronic components in the system, our new inverter box has been upgraded with additional protection, while allowing reliable operation. The inverter box is fitted with punched sheet metal & resin sheet.



Punched sheet metal  
The diameter of each hole of punched sheet metal is  $\phi 4\text{mm}$  to prevent small insect

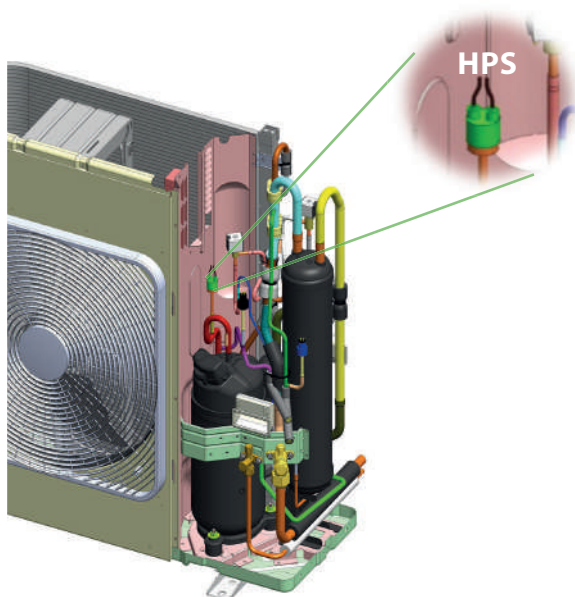


**HPS protection**

High pressure switch is safeties installed on CDU to protect component failure. HPS will release the refrigerant if the leak occurs, this will protect A/C component from critical damage.

**Fully enclosure E-box design**

Fully fireproof electrical enclosure to ensure no risk by preventing fire spread. TOSHIBA is seriously concerned on human safety, our safety standard cover electrical shock explosion and fire-burn spread

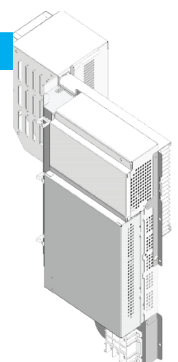

## Environmentally oriented *Care*

At Toshiba, our concerns for environment have led us to use the R-410A HFC refrigerant, which is confirmed to be non-ozone depleting, non-flammable and non-toxic.

6HP

3.3 kg

73%

Reduced refrigerant

6HP

0.9 kg

\* Factory charging



## Smart control *Convenience*


MiNi-SMMS 7 is compatible with various type of controller which will expand user air conditioner control capability

The ON-OFF controller makes it easy to manage all indoor units from single location.

ON-OFF controller  
TCB-CC163TLE2




All ON-OFF button

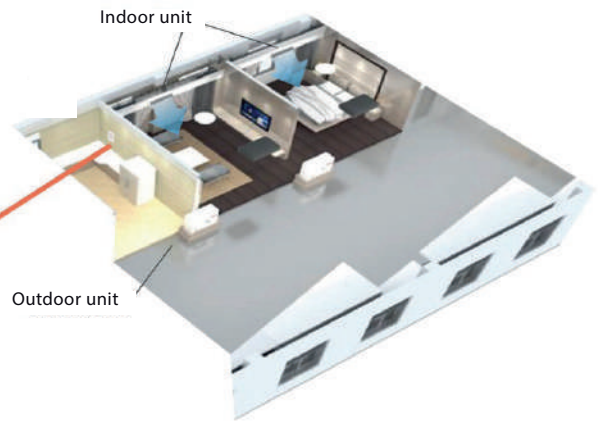

## MiNi-SMMS 7

User



Smart BMS manager




Administrator


User



**Piping design flexibility**

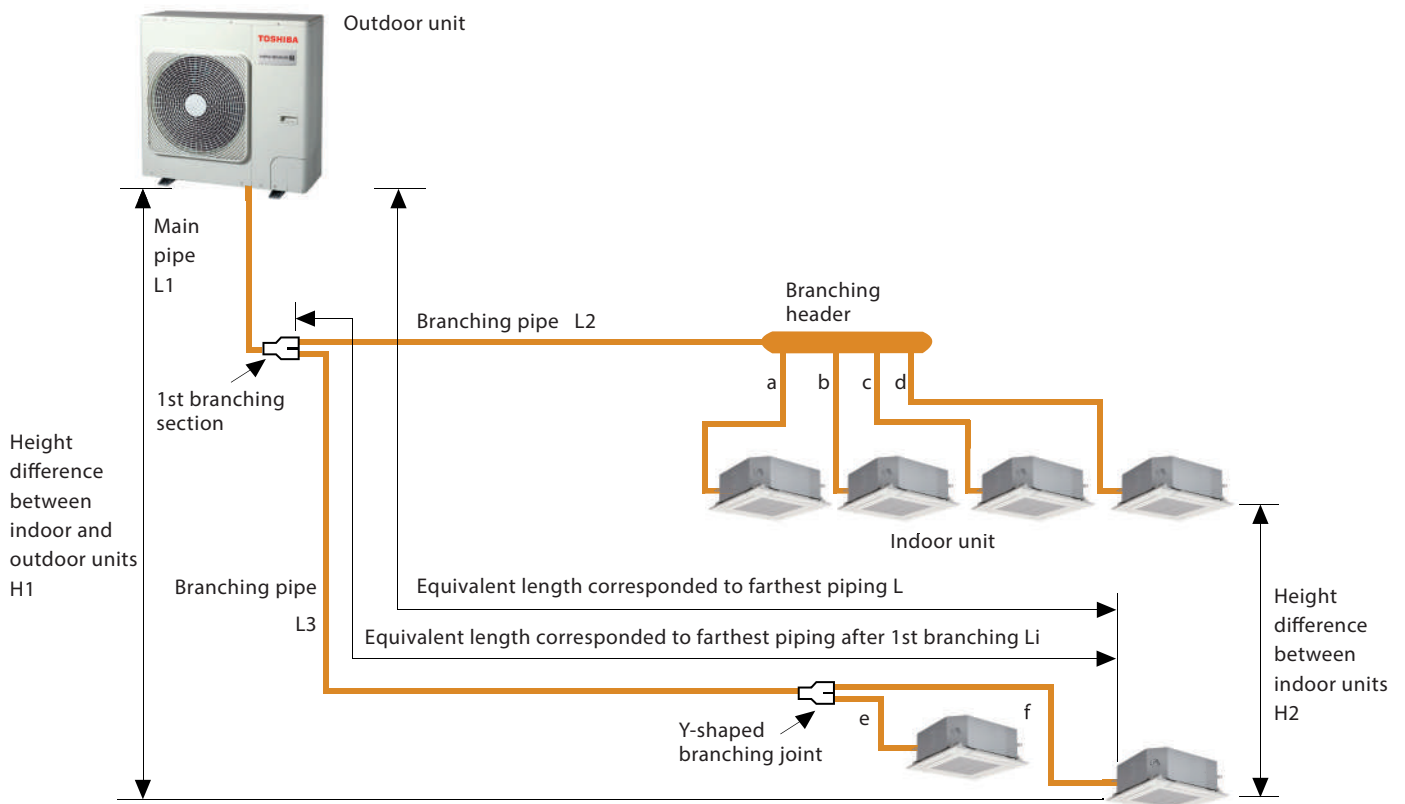

		Allowable value	Piping section	
Pipe Length	Total extension of pipe (Liquid pipe, real length)	90 m	$L1 + L2 + L3 + a + b + c + d + e + f$	
	Furthest piping length $L$ (*1)	Real length	50 m	
		Equivalent length	60 m	
	Max. equivalent length of main pipe	30 m	$L1$	
	Max. equivalent length of furthest piping from 1st branching $L_i$ (*1)	20 m	$L3 + f$	
	Max. real length of indoor unit connecting pipe	10 m	$a, b, c, d, e, f$	
Height Difference	Height between indoor and outdoor units $H1$	Upper outdoor unit	15 m	---
		Lower outdoor unit	15 m	---
	Height between indoor units $H2$		10 m	---

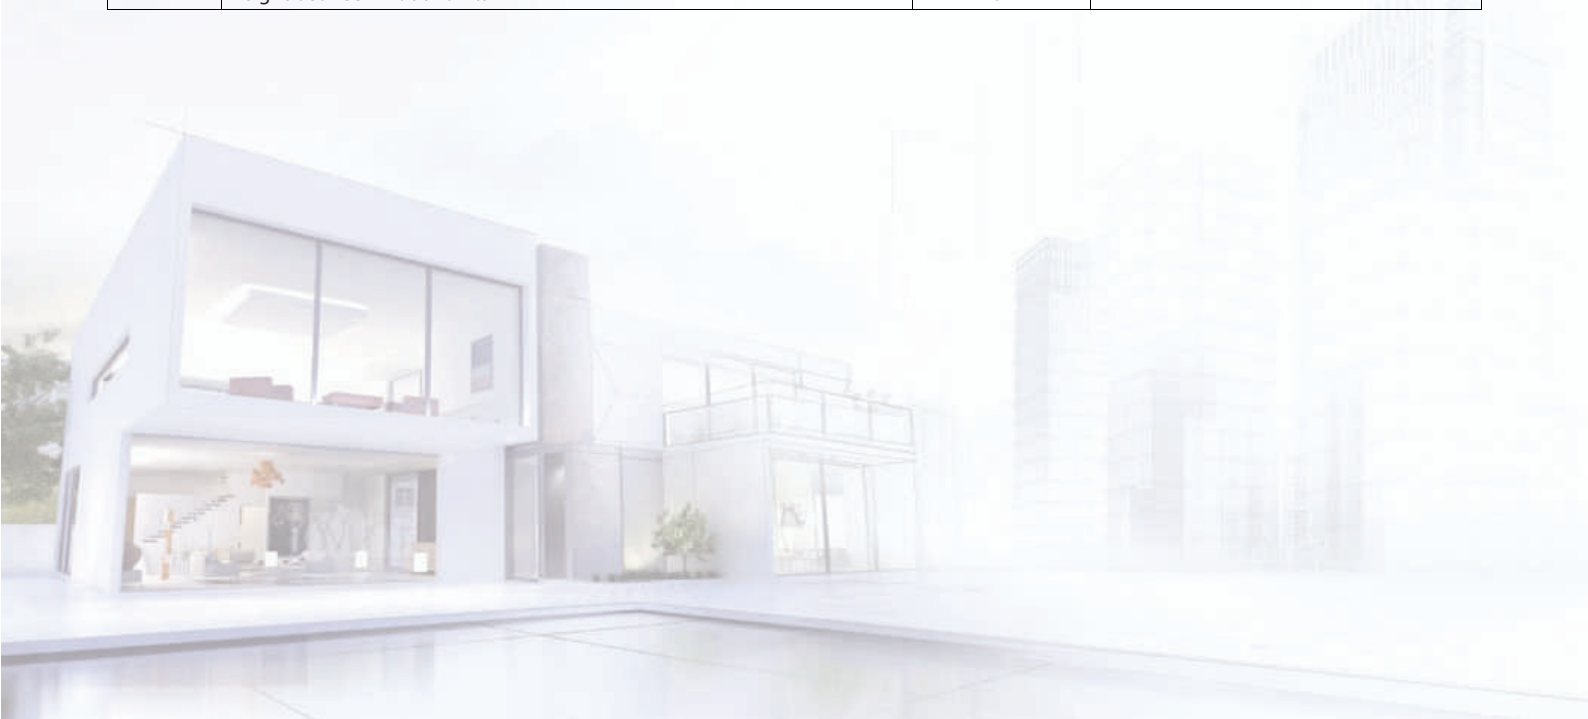

## Specifications

Outdoor unit model name			MCY-MAP0401TP-T	MCY-MAP0501TP-T	MCY-MAP0601TP-T	
Outdoor unit type			Inverter	Inverter	Inverter	
Capacity code			4	5	6	
Cooling Capacity (*1)	kW		12.1	14.1	16.0	
	BTU (*1.1)		41,300	48,100	54,600	
	BTU (*1.2)		41,800	48,800	55,300	
Electrical characteristics (Nominal) (*1)	Power supply (*2)		1 phase 50Hz 220-240V, 1 phase 60Hz 220V			
	Cooling	Running current	A	15.6-14.3	19.1-17.5	22.9-21.0
		Power consumption	kW	3.18	3.95	4.79
		Power factor	%	93	94	95
		EER		3.81	3.57	3.34
Starting Current		A	Soft start	Soft start	Soft start	
Dimension	Unit	mm	890	890	890	
		Width	mm	900	900	900
		Depth	mm	320	320	320
	Packing	Unit	mm	960	960	960
		Width	mm	970	970	970
		Depth	mm	440	440	440
Total Weight	Unit	kg	74	74	74	
	Packing unit	kg	79	79	79	
Appearance (Color)			Silky shade (Munsell 1Y8.5/0.5)			
Compressor	Type		Hermetic twin rotary compressor			
	Motor output		kW			
Fan unit	Fan		Propeller fan			
	Motor output		W			
	Air volume		m3/h	4700	4850	5000
Refrigerant R410A (Charged refrigerant amount) (*3)			kg			
Electrical specifications	Unit	MCA (*4)	A	27.0	28.0	28.0
		MOCP (*5)	A	32.0	32.0	32.0
Piping length		Total extension of pipe		90.0	90.0	90.0
		Farthest piping length (real length)		50.0	50.0	50.0
		Height difference (upper outdoor unit)		15.0	15.0	15.0
		Height difference (lower outdoor unit)		15.0	15.0	15.0
		Height between indoor units		10.0	10.0	10.0
Refrigerant piping	Connecting port dia	Gas side (main pipe)	mm	15.9	15.9	19.1
		Liquid side (main pipe)	mm	9.5	9.5	9.5
	Connecting method	Gas side		Flare	Flare	Flare
		Liquid side		Flare	Flare	Flare
Operation temperature range			°C DB			
Max. No. of connected indoor units			5 to 50			
Connectable FCU diversity			6			
Sound pressure level			dB(A)			
			52	53	55	

Notes: (\*1) Rated conditions

(\*1.1) Indoor air temperature 27.0 °C DB/ 19.0 °C WB, outdoor air temperature 35.0 °C DB

(\*1.2) Indoor air temperature 27.0 °C DB/ 19.5 °C WB, outdoor air temperature 35.0 °C DB

The standard pipe means that equivalent piping length of 7.5 m and standard 0 m piping height difference

(\*2) The source voltage must not fluctuate more than ± 10%

(\*3) The amount dose not consider extra piping length and indoor unit type


Refrigerant must be added on site in accordance with the actual piping length and indoor unit type

(\*4) Select wire size base on the large value of MCA

(\*5) MOCP: Maximum overcurrent protection (Amps)




**Outdoor units**

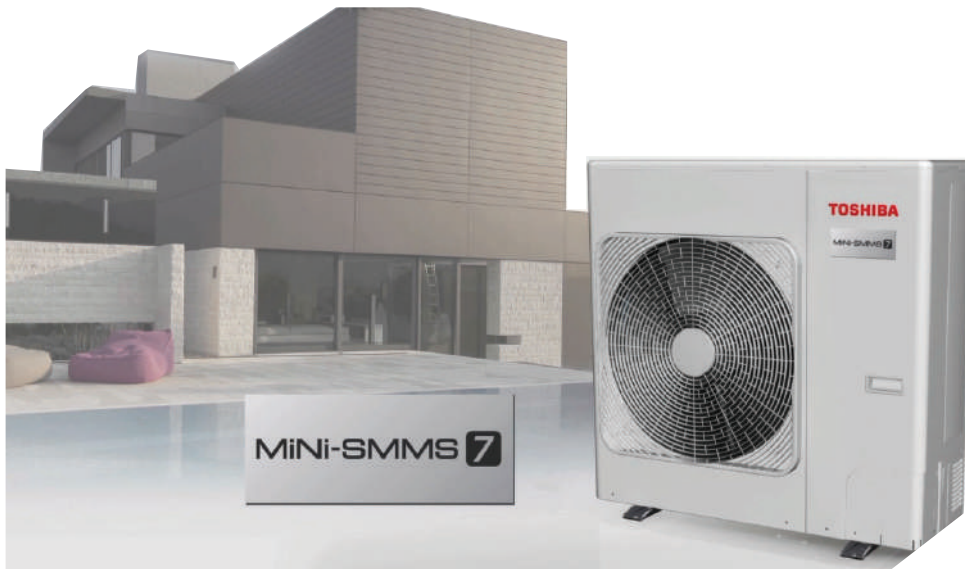

4HP	Model name	MCY-MAP0401TP-T
	Cooling capacity	12.1 kW
5HP	Model name	MCY-MAP0501TP-T
	Cooling capacity	14.1 kW
6HP	Model name	MCY-MAP0601TP-T
	Cooling capacity	16.0 kW

MCY-MAP0401TP-T to MCY-MAP0601TP-T

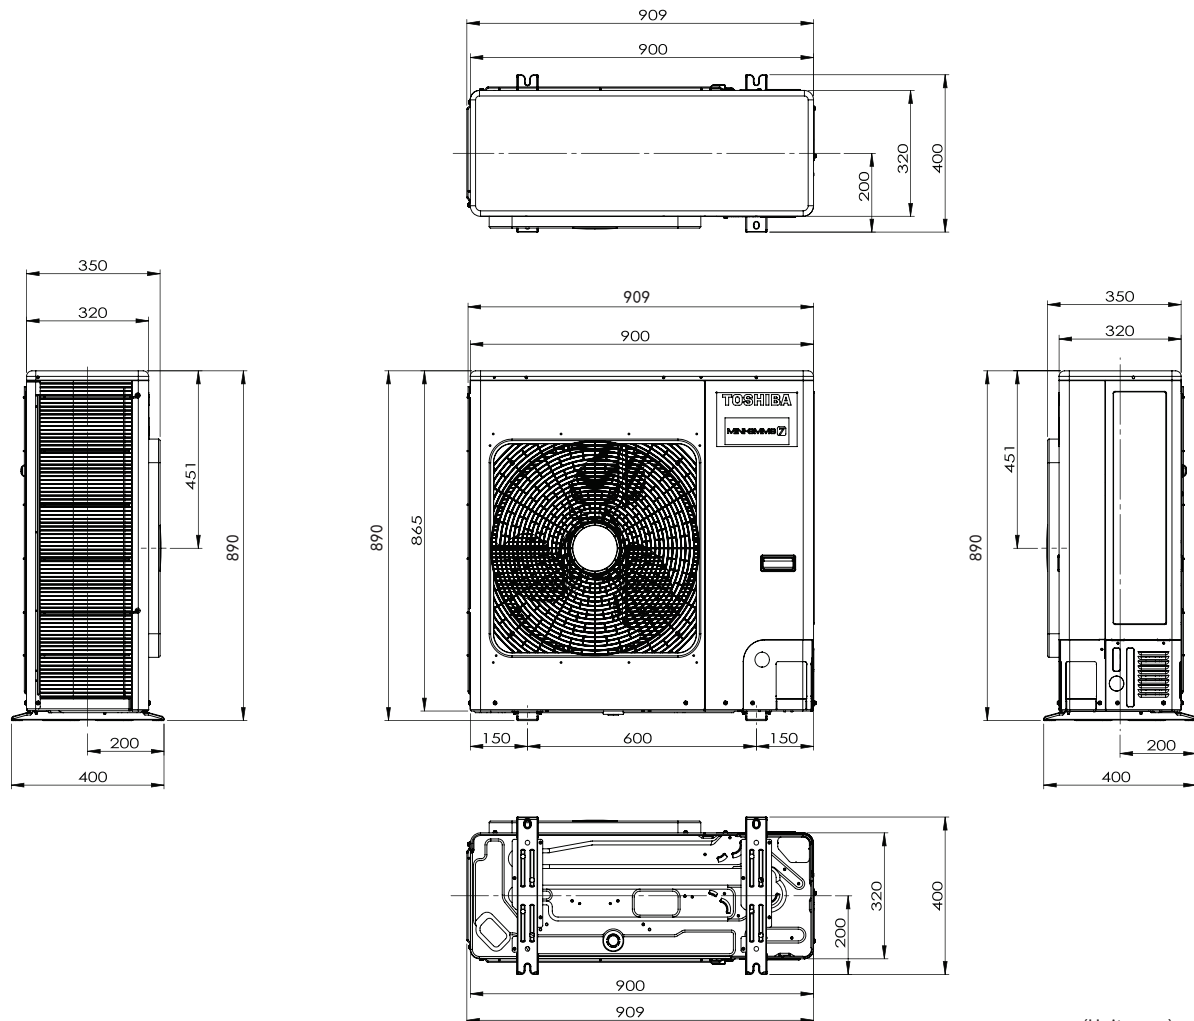

(Unit : mm)





## Better Air Solutions

Through our commitment to world-class efficiency versatile scalability and leading quality, Toshiba Air Conditioning advances leading-edge technologies to find the most forward-thinking solutions possible for your world.




"SMMS-7 the senses of cooling"

# 7 Senses of smartness

Because understand your real needs, we have searched for and finally found 7 senses of smartness in air conditioning, which we have innovately developed into the most advance technologies MiNi-SMMS 7 this VRF is cooling optimized for hot and humid temperature.

- >>> **Sense of space**  
Space saving and light weight
- >>> **Sense of strength**  
High reliability
- >>> **Sense of endurance**  
Wider ambient operation
- >>> **Sense of care**  
Enviromentally oriented
- >>> **Sense of efficiency**  
Higher energy efficiency
- >>> **Sense of convenience**  
Smart control
- >>> **Sense of flexibility**  
Design flexibility



**Indoor units**

Cooling capacity (HP)	4-way air discharge cassette type (MMU-)	Compact 4-way cassette type (MMU-)	2-way air discharge cassette type (MMU-)	1-way air discharge cassette type (MMU-)	Slim duct type (MMD-)	Super Slim duct type (MMD-)	Concealed duct high static pressure type (MMD-)	Concealed duct type (MMD-)
2.2 kW (0.8 HP)		AP0077MH-E	AP0072WH1	AP0074YH1-E	AP0074SPH1-E	AP0076M(P)HY*		AP0076BHP-T
2.5 kW (0.9HP)						AP0086M(P)HY*		
2.8 kW (1.0 HP)	AP0094HP-T	AP0097MH-E	AP0092WH1	AP0094YH1-E	AP0094SPH1-E	AP0096M(P)HY*		AP0096BHP-T
3.2kW (1.1HP)						AP0106M(P)HY*		
3.6 kW (1.25HP)	AP0124HP-T	AP0127MH-E	AP0122WH1	AP0124YH1-E	AP0124SPH1-E	AP0126M(P)HY*		AP0126BHP-T
4.0 kW (1.5HP)						AP0146M(P)HY*		
4.5 kW (1.7 HP)	AP0154HP-T	AP0157MH-E	AP0152WH1	AP0154SH1-E	AP0154SPH1-E	AP0156M(P)HY*		AP0156BHP-T
5.0 kW (1.85HP)						AP0176M(P)HY*		
5.6 kW (2.0 HP)	AP0184HP-T	AP0187MH-E	AP0182WH1	AP0184SH1-E	AP0184SPH1-E	AP0186M(P)HY*	AP0186HP-T*	AP0186BHP-T
6.3 kW (2.25HP)						AP0206M(P)HY*		
7.1 kW (2.5HP)	AP0244HP-T		AP0242WH1	AP0244SH1-E	AP0244SPH1-E	AP0246M(P)HY*	AP0246HP-T*	AP0246BHP-T
8.0 kW (3.0 HP)	AP0274HP-T		AP0272WH1		AP0274SPH1-E	AP0276M(P)HY*	AP0276HP-T*	AP0276BHP-T
9.0 kW (3.2 HP)	AP0304HP-T		AP0302WH1					AP0306BHP-T
11.2 kW (4.0 HP)	AP0364HP-T		AP0362WH1				AP0366HP-T*	AP0366BHP-T
14.0 kW (5.0 HP)	AP0484HP-T		AP0482WH1				AP0486HP-T*	AP0486BHP-T
16.0 kW (6.0 HP)	AP0564HP-T		AP0562WH1				AP0566HP-T*	AP0566BHP-T
22.4 kW (8.0 HP)							AP0726HP-T	
28.0 kW (10.0 HP)							AP0966HP-T	



Cooling capacity (HP)	Ceiling type (MMC-)	High wall type series 3 (MMK-)	High wall type Series 7 (MMK-)	Floor standing concealed type (MML-)	Floor standing cabinet type (MML-)	Console type (MML-)	Floor standing type (MMF-)	Large capacity floor standing Direct type (MMF-)	Large capacity floor standing Duct type (MMF-)
2.2 kW (0.8 HP)		AP0073H-T	AP0077HP-T	AP0074BH1-E	AP0074H1-E	AP0074NH1-E			
2.8 kW (1.0 HP)		AP0093H-T	AP0097HP-T	AP0094BH1-E	AP0094H1-E	AP0094NH1-E			
3.6 kW (1.25 HP)		AP0123H-T	AP0127HP-T	AP0124BH1-E	AP0124H1-E	AP0124NH1-E			
4.5 kW (1.7 HP)	AP0158HP-T	AP0153H-T		AP0154BH1-E	AP0154H1-E	AP0154NH1-E	AP0156H1-E		
5.6 kW (2.0 HP)	AP0188HP-T	AP0183H-T		AP0184BH1-E	AP0184H1-E	AP0184NH1-E	AP0186H1-E		
7.1 kW (2.5 HP)	AP0248HP-T	AP0243H-T		AP0244BH1-E	AP0244H1-E		AP0246H1-E		
8.0 kW (3.0 HP)	AP0278HP-T						AP0276H1-E		
11.2 kW (4.0 HP)	AP0368HP-T						AP0366H1-E		
14.0 kW (5.0 HP)	AP0488HP-T						AP0486H1-E		
16.0 kW (6.0 HP)	AP0568HP-T						AP0566H1-E		
22.4 kW (8.0 HP)								AP0725HP-VA/VB	AP0725DHP-VA/VB
28.0 kW (10.0 HP)								AP0965HP-VA/VB	AP0965DHP-VA/VB
45.0 kW (16.0 HP)								AP1445HP-VA/VB	AP1445DHP-VA/VB
56.0 kW (20.0 HP)								AP1925HP-VA/VB	AP1925DHP-VA/VB

\*Super slim duct MMD-AP\*\*\*6MPHY, P means coming with drain pump.



Air volume	Fresh air intake indoor unit type (MMD-)	Air to air heat exchanger with DX coil (MMD-)	Air to air heat exchanger*
150 m <sup>3</sup> /h			VN-M150HE
250 m <sup>3</sup> /h			VN-M250HE
350 m <sup>3</sup> /h			VN-M350HE
500 m <sup>3</sup> /h		VN502HEX1E	VN-M500HE
650 m <sup>3</sup> /h			VN-M650HE
800 m <sup>3</sup> /h		VN802HEX1E	VN-M800HE
1000 m <sup>3</sup> /h		VN1002HEX1E	VN-M1000HE
1500 m <sup>3</sup> /h			VN-M1500HE
2000 m <sup>3</sup> /h			VN-M2000HE
1080 m <sup>3</sup> /h	AP0481HFE		
1680 m <sup>3</sup> /h	AP0721HFE		
2100 m <sup>3</sup> /h	AP0961HFE		

\* Do not connect to refrigerant piping from outdoor unit.  
Control wires can be connected.



4-way air discharge cassette type

MMU-AP\*\*\*4HP-T



Individual louver control

The angles of each of the four louver can be set individually => Enables airflow to be adapted to user preferences.



Note: RBC-AMT32E, RBC-AMS41E only

Easy installation

The panel is attached using the bolt already installed on the indoor unit.



RBC-U31PGP(W)-E

Technical specifications

Model name	MMU-	AP0094HP-T	AP0124HP-T	AP0154HP-T	AP0184HP-T	AP0244HP-T	AP0274HP-T	AP0304HP-T	AP0364HP-T	AP0484HP-T	AP0564HP-T	
Cooling capacity* <sup>1</sup>	(kW)	2.8	3.6	4.5	5.6	7.1	8.0	9.0	11.2	14.0	16.0	
	BTU(*1.1)	9,600	12,300	15,400	19,100	24,200	27,300	30,700	38,200	47,800	54,600	
	BTU(*1.2)	9,700	12,400	15,600	19,300	24,500	27,600	31,000	38,600	48,400	55,300	
Electrical characteristics	Power requirements	1-phase 50Hz 230V (220~240V) / 1-phase 60Hz 220V (Separate power supply for indoor units required.)										
	Power consumption 50 Hz/60 Hz (kW)	0.021/0.021	0.023/0.023	0.026/0.026	0.036/0.036	0.043/0.043	0.088/0.088	0.112/0.112	0.112/0.112			
Appearance (Ceiling panel)	Model	RBC-U31PGP(W)-E										
External dimensions: Main unit (Ceiling panel)*	Height (mm)	256 (30)*							319 (30)*			
	Width (mm)	840 (950)*										
	Depth (mm)	840 (950)*										
Total weight: Main unit (Ceiling panel)*	(kg)	18 (4)*			20 (4)*				25 (4)*			
Fan unit	Standard air flow (High/Mid/Low) (m <sup>3</sup> /h)	800/730/680		930/830/790	1050/920/800	1290/920/800		1320/1110/850	1970/1430/1070	2130/1430/1130	2130/1520/1230	
	Motor output (W)	14				20			68	72		
Connecting pipe	Gas side (mm)	ø9.5		ø12.7			ø15.9					
	Liquid side (mm)	ø6.4					ø9.5					
	Drain port (nominal dia.) (mm)	25 (Polyvinyl chloride tube)										
Sound pressure level* (High/Mid/Low) (dB(A))		30/29/27	31/29/27	32/29/27	35/31/28		38/33/30	43/38/32	46/38/33	46/40/33		

\*Figures in parentheses are for ceiling panels

Note: (\*1) The cooling capacities are measured under the conditions specified by JIS B 8615 based on the reference piping. The reference piping consists of 5 m of main piping and 2.5 m of branch piping connected with 0 m height


(\*1.1) Indoor air temperature 27.0°C DB/ 19.0°C WB, outdoor air temperature 35.0°C DB

(\*1.2) Indoor air temperature 27.0°C DB/ 19.5°C WB, outdoor air temperature 35.0°C DB

Note: The sound level are measured in an anechoic chamber in accordance with JIS B 8616

Normally, the values measured in the actual operating environment become larger than the indicated values due to the effects of external sound


MMU-AP0074HP-T to AP0564HP-T

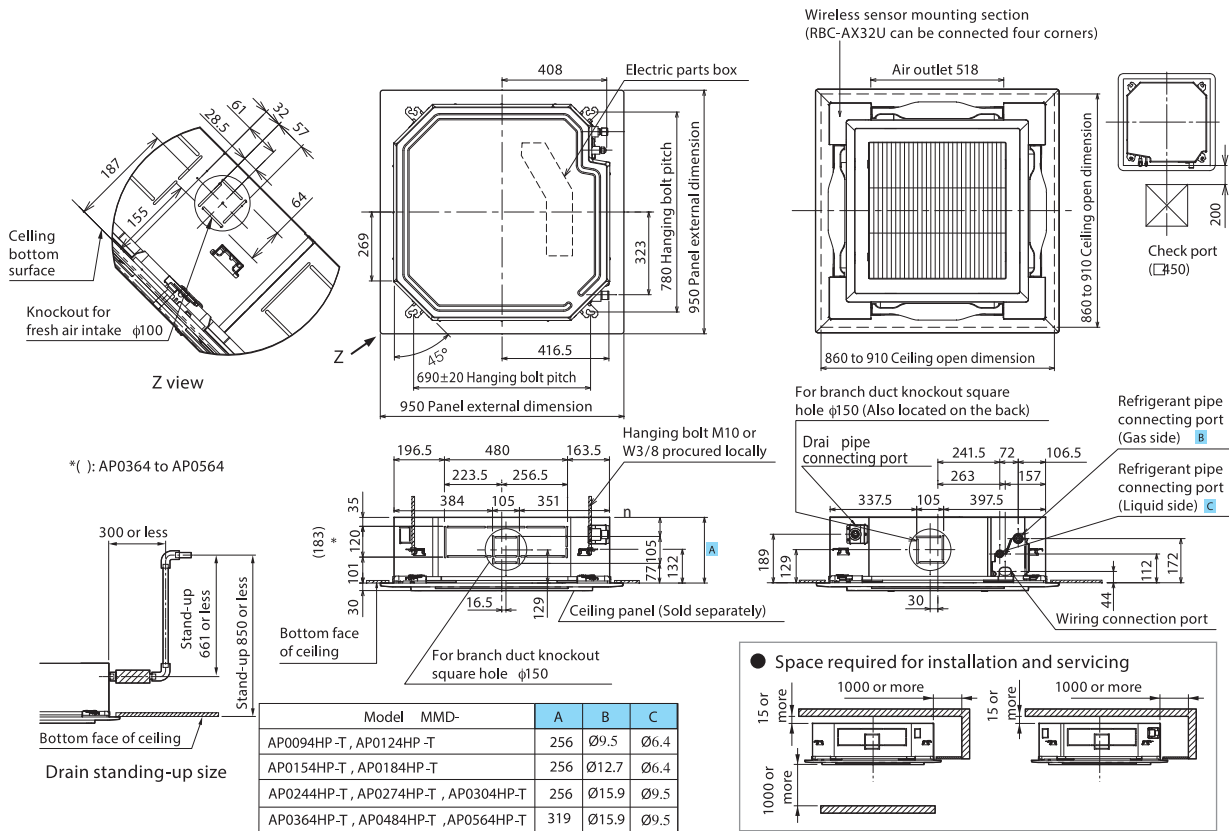

\* The figure shows the RBC-U31PGP(W)-E panel.

(Unit: mm)

Options

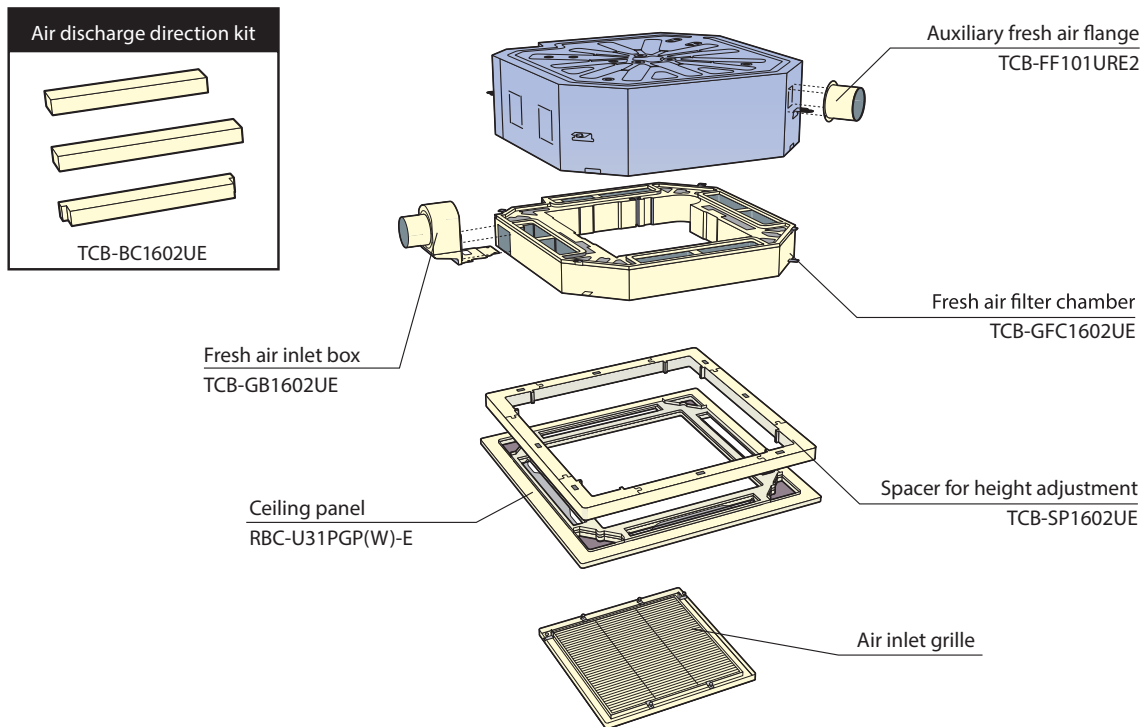


**Compact 4-way cassette type**

**MMU-AP\*\*\*7MH-E**




**Superior design with compact chassis**

This compact unit (620 × 620 mm) fits with flat panel perfectly into ceilings and matches standard architectural modules without the need to cut ceiling tiles, makes your room look more elegant.

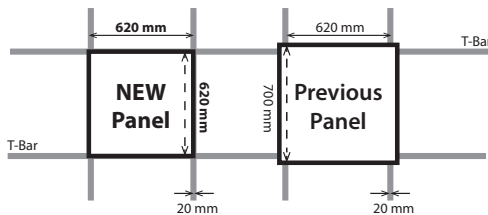

**Individual louver control\***

The wind direction and swing operation can be set individually by each louver, which can be set into memory for future use. Furthermore, the optional occupancy sensor also improve efficiency energy.

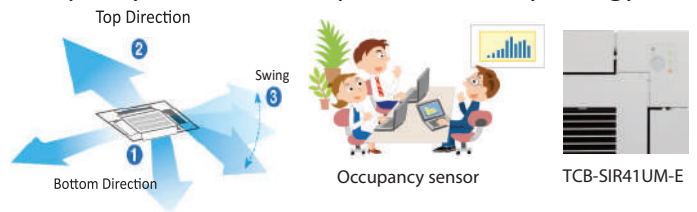

\*The function is available with RBC-AMS55E-ES/EN

**Technical specifications**

Model name	MMU-	AP0077MH-E	AP0097MH-E	AP0127MH-E	AP0157MH-E	AP0187MH-E
Cooling capacity*1	(kW)	2.2	2.8	3.6	4.5	5.6
	BTU(*1.1)	7,500	9,600	12,300	15,400	19,100
	BTU(*1.2)	7,600	9,700	12,400	15,600	19,300
Electrical characteristics	Power requirements	1-phase 50Hz 230V (220–240V) / 1-phase 60Hz 220V (Separate power supply for indoor units required.)				
	Power consumption 50 Hz/60 Hz (kW)	0.016/0.016	0.025/0.025	0.027/0.027	0.030/0.030	0.052/0.052
Appearance (Ceiling panel)	Model	RBC-UM21PG(W)-E				
External dimensions: Main unit (Ceiling panel)*	Height (mm)	256 (12)*				
	Width (mm)	575 (620)*				
	Depth (mm)	575 (620)*				
Total weight: Main unit (Ceiling panel)*	(kg)	15 (2.5)*				
Fan unit	Standard air flow (M+ / M / L+ / L) (m³/h)	552 (500/462/395/378)	570 (520/468/395/378)	594 (550/504/420/402)	660 (600/552/480/468)	840 (740/642/540/522)
	Motor output (W)	60				
Connecting pipe	Gas side (mm)	ø9.5			ø12.7	
	Liquid side (mm)	ø6.4				
	Drain port (Nominal dia. mm)	VP 20 (Polyvinyl chloride tube)				
Sound pressure level* High (M+ / M / L+ / L)	(dB(A))	37 (34/33/30/29)	38 (35/33/30/29)	38 (36/34/31/30)	40 (37/35/32/31)	47 (43/39/36/34)

\*Figures in parentheses are for ceiling panels

Notes: (\*1) The cooling capacities are measured under the conditions specified by JIS B 8615 based on the reference piping. The reference piping consists of 5 m of main piping and 2.5 m of branch piping connected with 0 m height


(\*1.1) Indoor air temperature 27.0 c DB/ 19.0 c WB, outdoor air temperature 35.0 c DB  
 (\*1.2) Indoor air temperature 27.0 c DB/ 19.5 c WB, outdoor air temperature 35.0 c DB

Note: The sound level are measured in an anechoic chamber in accordance with JIS B 8616


Normally, the values measured in the actual operating environment become larger than the indicated values due to the effects of external sound

Note: M+, L+, will be available with RBC-AMS54E/EN only

## MMU-AP0077MH-E to AP0187MH-E

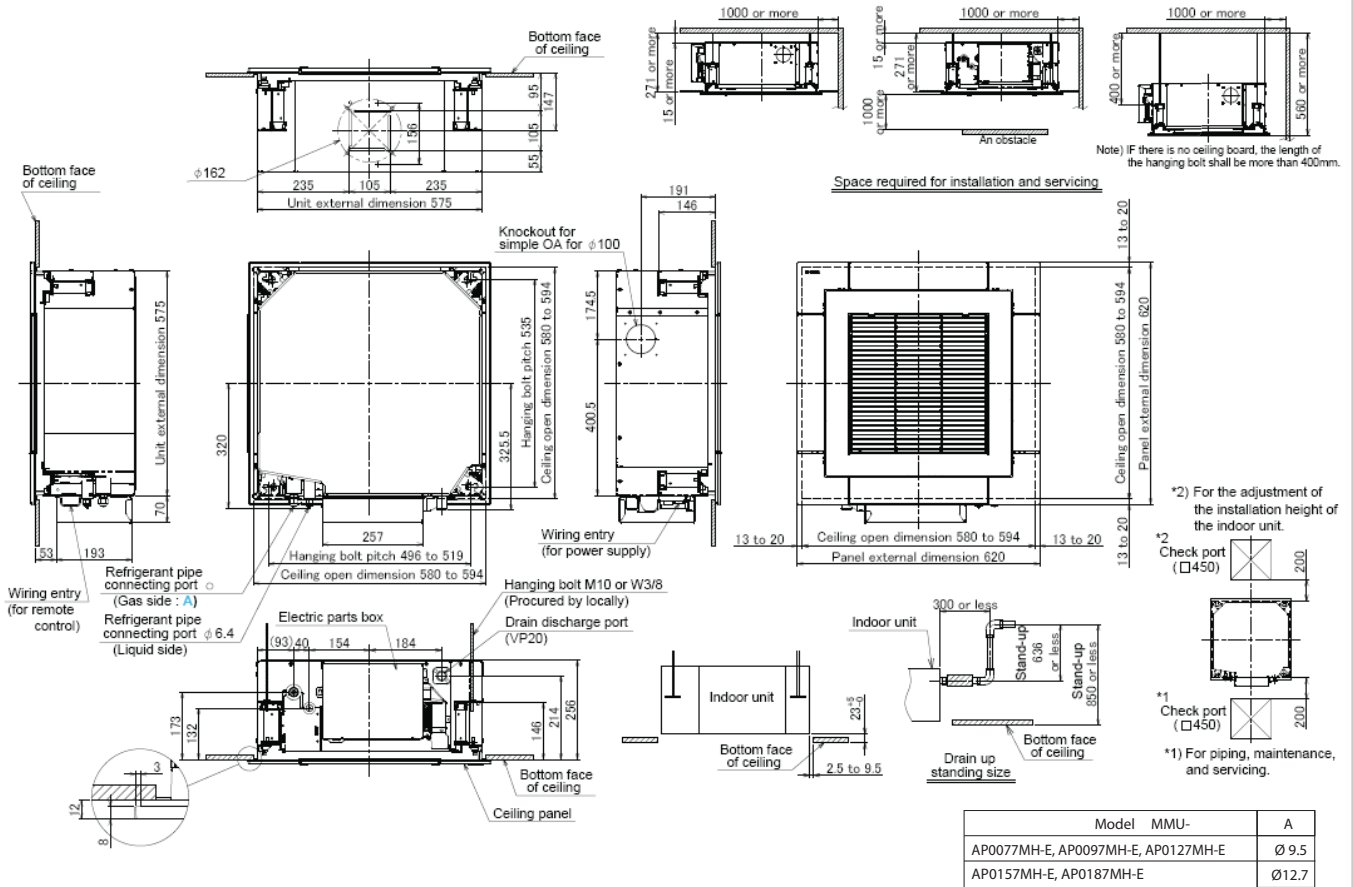

## Options

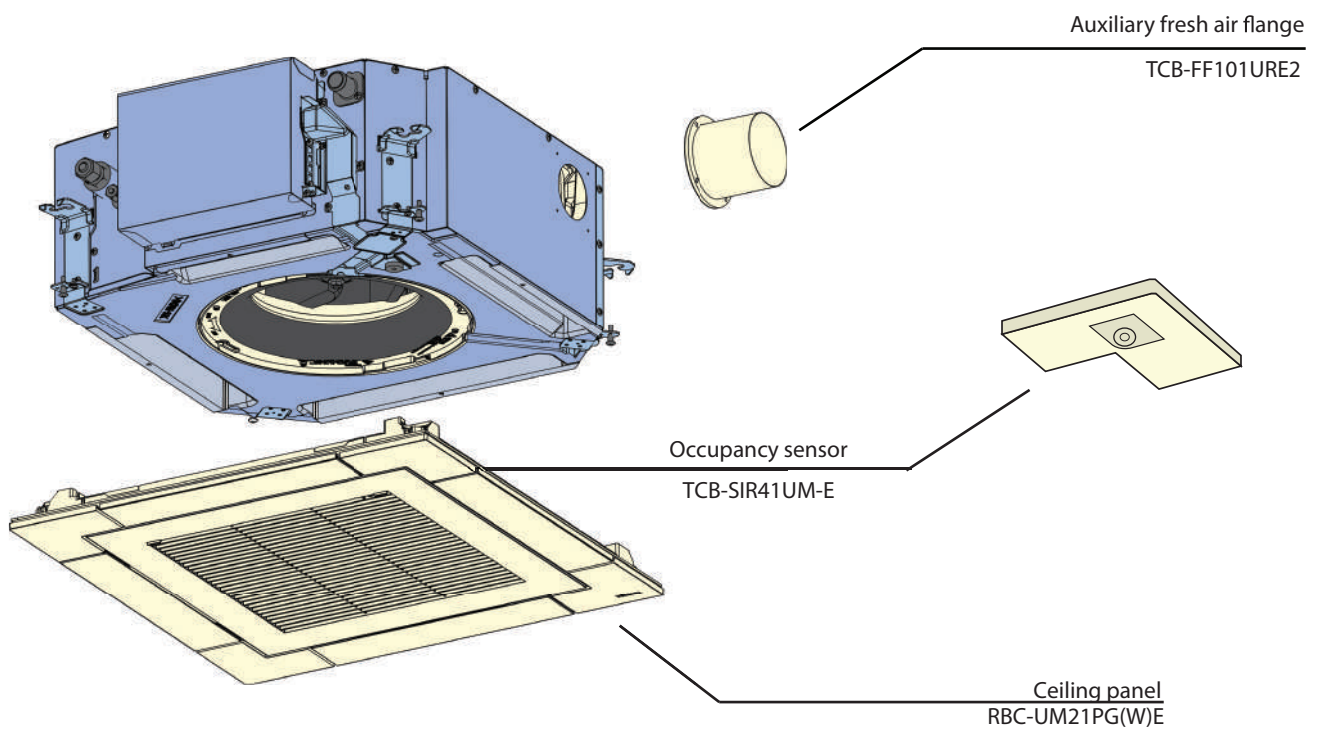

2-way air discharge cassette type

MMU-AP\*\*\*2WH1



◀ Slim and compact unit

Unified the width of ceiling panel to 680mm.  
 Condensate drain pump included.  
 Available for ceilings up to 3.8m in height. (in case of 0.8HP to 3.2HP)  
 Easy installation and fine adjustment using the “Adjust-Cover” function.

Technical specifications

Model name	MMU-	AP0072WH1	AP0092WH1	AP0122WH1	AP0152WH1	AP0182WH1	AP0242WH1	AP0272WH1	AP0302WH1	AP0362WH1	AP0482WH1	AP0562WH1						
Cooling capacity*1	(kW)	2.2	2.8	3.6	4.5	5.6	7.1	8.0	9.0	11.2	14.0	16.0						
	BTU(*1.1)	7,500	9,600	12,300	15,400	19,100	24,200	27,300	30,700	38,200	47,800	54,600						
	BTU(*1.2)	7,600	9,700	12,400	15,600	19,300	24,500	27,600	31,000	38,600	48,400	55,300						
Electrical characteristics	Power requirements	1-phase 50Hz 230V (220–240V) / 1-phase 60Hz 220V (Separate power supply for indoor units required.)																
	Power consumption 50 Hz/60 Hz (kW)	0.029/0.029		0.030/0.030		0.044/0.044		0.054/0.054		0.064/0.064		0.076/0.076		0.088/0.088		0.117/0.117		
Appearance (Ceiling panel)	Model	RBC-UW283PG(W)-E				RBC-UW803PG(W)-E				RBC-UW1403(W)PG-E								
External dimensions: Main unit (Ceiling panel)*	Height (mm)	295 (20)				345 (20)												
	Width (mm)	815 (1050)				1180 (1415)				1600 (1835)								
	Depth (mm)	570 (680)																
Total weight: Main unit (Ceiling panel)*	(kg)	19 (10)				26 (14)				36 (14)								
Fan unit	Standard air flow (High/Mid/Low) (m <sup>3</sup> /h)	558/498/450			600/534/450		900/750/618		1050/840/738		1260/900/780		1740/1434/1182		1800/1482/1230		2040/1578/1320	
	Motor output (W)	20				30		40		50		70						
Connecting pipe	Gas side (mm)	ø9.5			ø12.7			ø15.9										
	Liquid side (mm)	ø6.4						ø9.5										
	Drain port (nominal dia.)	25 (Polyvinyl chloride tube)																
Sound pressure level* (High/Mid/Low)	(dB(A))	34/32/30			35/33/30			38/35/33		40/37/34		42/39/36		43/40/37		46/42/39		

\* Figures in parentheses are for ceiling panels

Notes: (\*1) The cooling capacities are measured under the conditions specified by JIS B 8615 based on the reference piping

The reference piping consists of 5 m of main piping and 2.5 m of branch piping connected with 0 m height

(\*1.1) Indoor air temperature 27.0°C DB/ 19.0°C WB, outdoor air temperature 35.0°C DB


(\*1.2) Indoor air temperature 27.0°C DB/ 19.5°C WB, outdoor air temperature 35.0°C DB

Note: The sound level are measured in an anechoic chamber in accordance with JIS B 8616


Normally, the values measured in the actual operating environment become larger than the indicated values due to the effects of external sound




MMU-AP0072WH1 to AP0152WH1

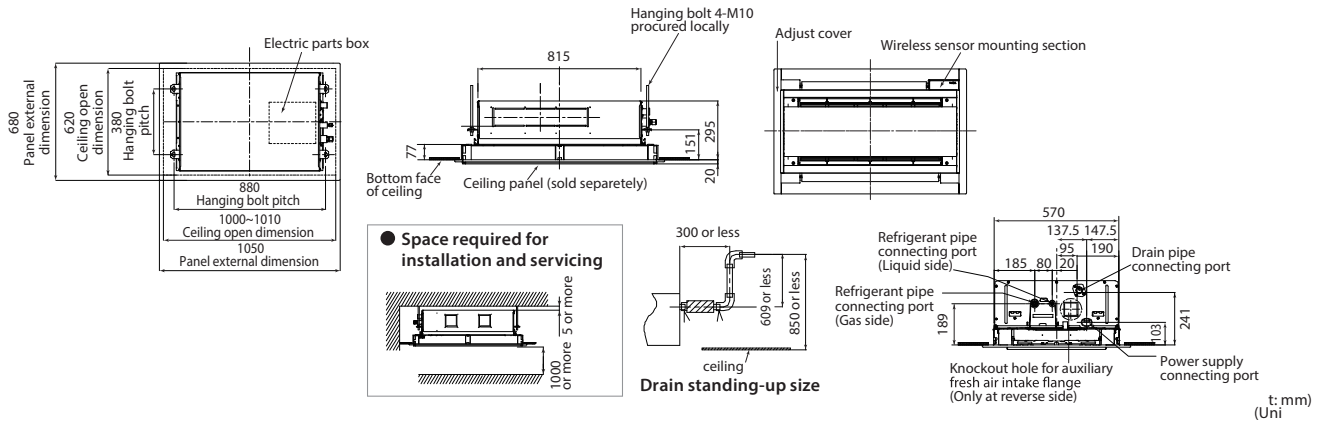


MMU-AP0182WH1 to AP0302WH1

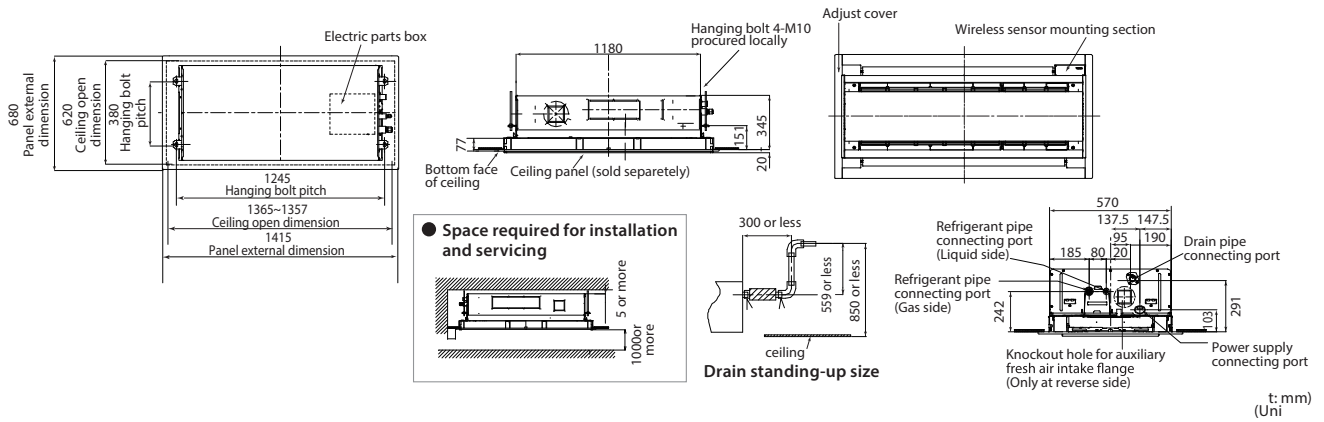

MMU-AP0362WH1 to AP0562WH1

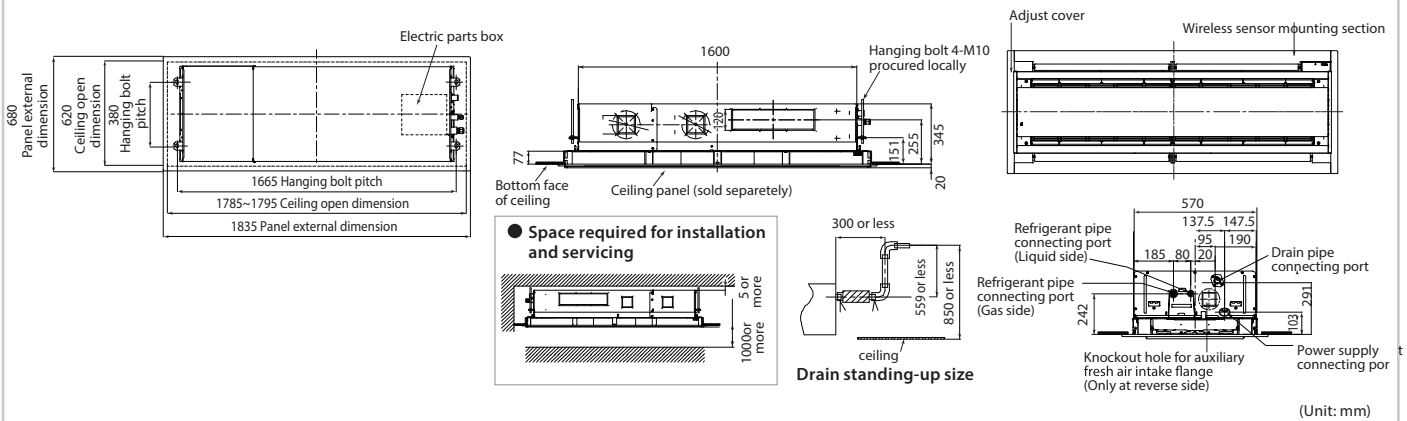

Options

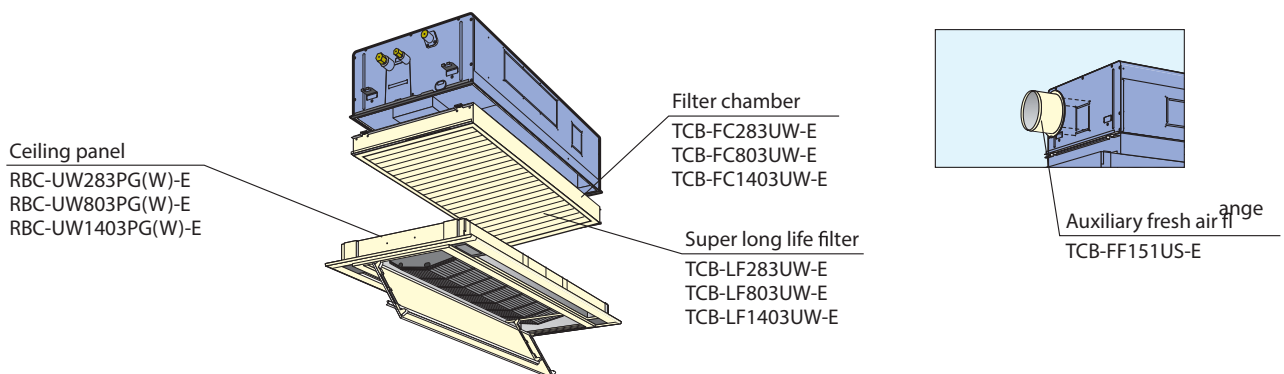

**1-way air discharge cassette type**

**MMU-AP\*\*\*4YH1-E**  
**MMU-AP\*\*\*4SH1-E**



**The perfect choice for hotels and reception areas**

Silent sound design ensures the quiet required for the office. Ideal for smaller rooms where one-way air distribution is required. Able to blow air straight out. Condensate drain pump included. Long-life filters fitted as standard.

**Fresh air intake is possible (MMU-AP\*\*\*4SH1-E)**

Preparations/connection possible with a circle duct flange.

**Technical specifications**

Model name		MMU-	AP0074YH1-E	AP0094YH1-E	AP0124YH1-E	AP0154SH1-E	AP0184SH1-E	AP0244SH1-E
Cooling capacity*1	(kW)		2.2	2.8	3.6	4.5	5.6	7.1
	BTU(*1.1)		7,500	9,600	12,300	15,400	19,100	24,200
	BTU(*1.2)		7,600	9,700	12,400	15,600	19,300	24,500
Electrical characteristics	Power requirements	1-phase 50Hz 230V (220–240V) / 1-phase 60Hz 220V (Separate power supply for indoor units required.)						
	Power consumption 50 Hz/60 Hz (kW)		0.053/0.056			0.042/0.041	0.046/0.045	0.075/0.073
Appearance (Ceiling panel)	Model		RBC-UY136PG			RBC-US21PGE		
External dimensions: Main unit (Ceiling panel)*	Height (mm)		235 (18)*			200 (20)*		
	Width (mm)		850 (1050)*			1000 (1230)*		
	Depth (mm)		400 (470)*			710 (800)*		
Total weight: Main unit (Ceiling panel)*	(kg)		22 (3.5)*			21 (5.5)*		22 (5.5)*
Fan unit	Standard air flow (High/Mid/Low) (m <sup>3</sup> /h)		540/480/420			750/690/630	780/720/660	1140/960/810
	Motor output (W)		22			30		
Connecting pipe	Gas side (mm)		ø9.5			ø12.7		ø15.9
	Liquid side (mm)				ø6.4			ø9.5
	Drain port (nominal dia.)		25 (Polyvinyl chloride tube)					
Sound pressure level* (High/Mid/Low)	(dB(A))		42/39/34			37/35/32	38/36/34	45/41/37

\*Figures in parentheses are for ceiling panels

Notes: (\*1) The cooling capacities are measured under the conditions specified by JIS B 8615 based on the reference piping. The reference piping consists of 5 m of main piping and 2.5 m of branch piping connected with 0 m height


(\*1.1) Indoor air temperature 27.0°C DB/ 19.0°C WB, outdoor air temperature 35.0°C DB

(\*1.2) Indoor air temperature 27.0°C DB/ 19.5°C WB, outdoor air temperature 35.0°C DB


Note: The sound level are measured in an anechoic chamber in accordance with JIS B 8616

Normally, the values measured in the actual operating environment become larger than the indicated values due to the effects of external sound

MMU-AP0074YH1-E to AP0124YH1-E

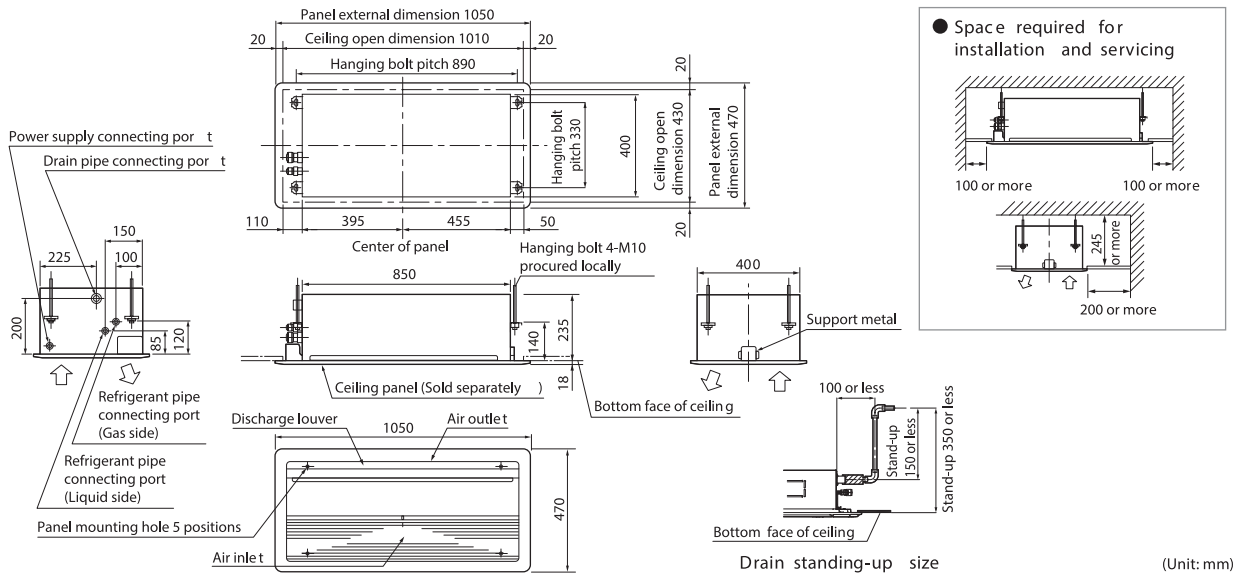


MMU-AP0154SH1-E to AP0244SH1-E

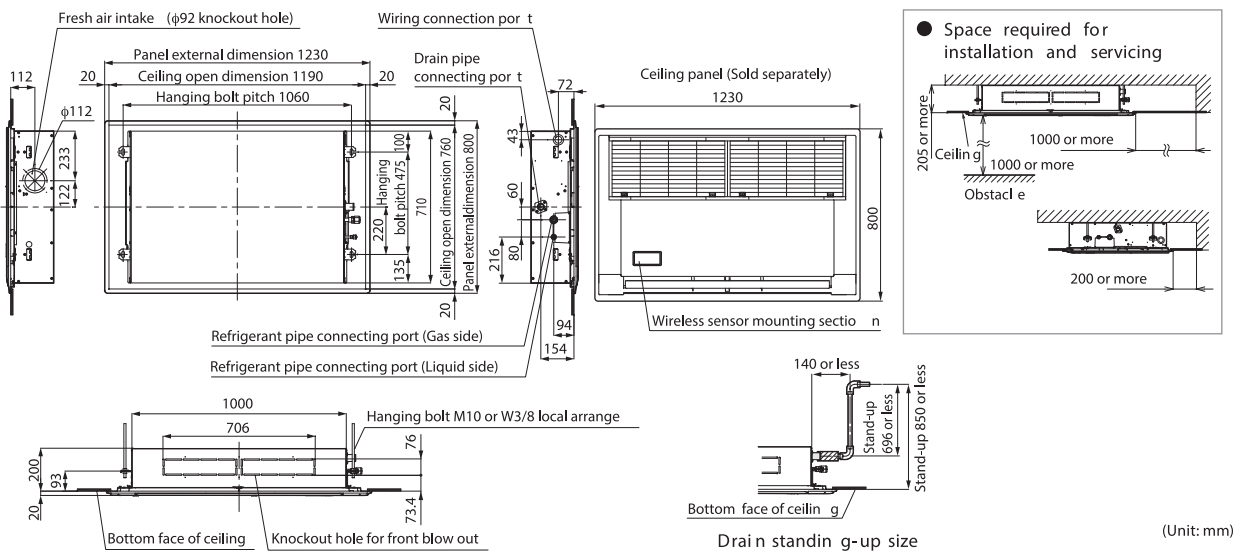


Options

MMU-AP0074YH1-E/AP0094YH1-E/AP0124YH1-E

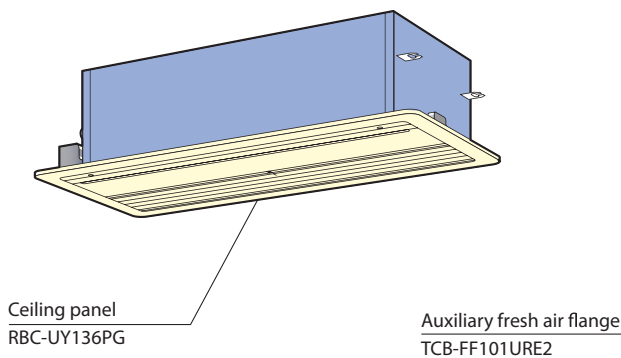

Front air discharge unit  
 TCB-BUS21HWE

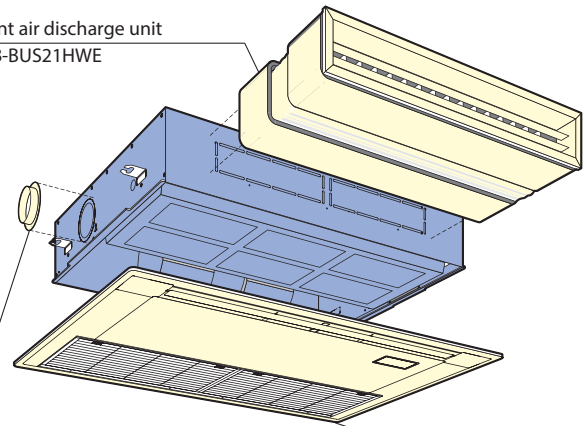

MMU-AP0154SH1-E/AP0184SH1-E/AP0244SH1-E

**Slim duct type**  
**MMD-AP\*\*\*4SPH1-E**



◀ **Functional design**

Only 210 mm in height for greater application flexibility. 4-step static pressure setup. Concealed installation within a ceiling void. Auxiliary fresh air intake available

◀ **Slim & quiet**

Perfect comfort throughout the room. Can be used with any style of air diffuser. Quiet, powerful operation.

**Technical specifications**

Model name	MMD-	AP0074SPH1-E	AP0094SPH1-E	AP0124SPH1-E	AP0154SPH1-E	AP0184SPH1-E	AP0244SPH1-E	AP0274SPH1-E	
Cooling capacity*1	(kW)	2.2	2.8	3.6	4.5	5.6	7.1	8.0	
	BTU(*1.1)	7,500	9,600	12,300	15,400	19,100	24,200	27,300	
	BTU(*1.2)	7,600	9,700	12,400	15,600	19,300	24,500	27,600	
Electrical characteristics	Power requirements	1-phase 50Hz 230V (220–240V) / 1-phase 60Hz 220V (Separate power supply for indoor units required.)							
	Power consumption 50 Hz/60 Hz (kW)	0.039/0.037	0.043/0.041	0.045/0.043	0.054/0.052	0.105//0.105			
External dimensions	Height (mm)	210							
	Width (mm)	845					1140		
	Depth (mm)	645							
Total weight (kg)		22			23		29		
Fan unit	Standard air flow (High/Mid/Low) (m <sup>3</sup> /h)	540/470/400		600/520/450	690/600/520	780/680/580		1080/1000/900	
	Motor output (W)	60						120	
	External static pressure (Pa)	6-16-31-46 (4 steps)			5-15-30-45 (4 steps)		4-14-29-44 (4 steps)	2-12-22-42 (4 steps)	
Connecting pipe	Gas side (mm)	ø9.5			ø12.7		ø15.9		
	Liquid side (mm)	ø6.4						ø9.5	
	Drain port (nominal dia.)	25 (Polyvinyl chloride tube)							
Sound pressure level* (High/Med./Low)	Under air inlet (dB(A))	36/33/30		38/35/32	39/36/33	40/38/36		49/47/44	
	Back air inlet (dB(A))	28/26/24		29/27/25	32/30/28	33/31/29		38/36/33	

Notes: (\*1) The cooling capacities are measured under the conditions specified by JIS B 8615 based on the reference piping. The reference piping consists of 5 m of main piping and 2.5 m of branch piping connected with 0 m height.


(\*1.1) Indoor air temperature 27.0°C DB/ 19.0°C WB, outdoor air temperature 35.0°C DB

(\*1.2) Indoor air temperature 27.0°C DB/ 19.5°C WB, outdoor air temperature 35.0°C DB


Note: The sound level are measured in an anechoic chamber in accordance with JIS B 8616

Normally, the values measured in the actual operating environment become larger than the indicated values due to the effects of external sound


**MMD-AP0074SPH1-E to AP0184SPH1-E**

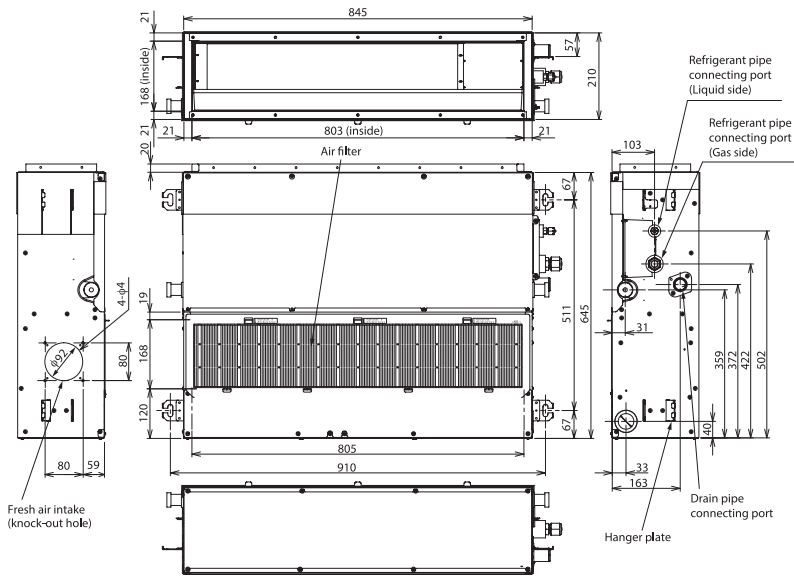


● Space required for installation and servicing

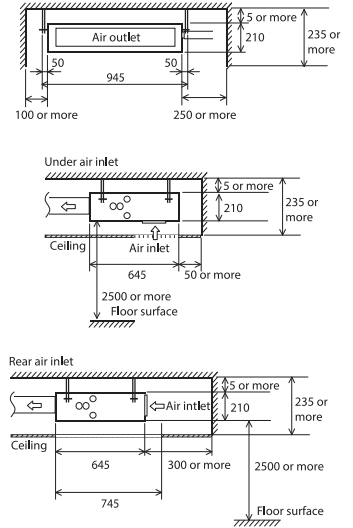

**MMD-AP0244SPH1-E to AP0274SPH1-E**

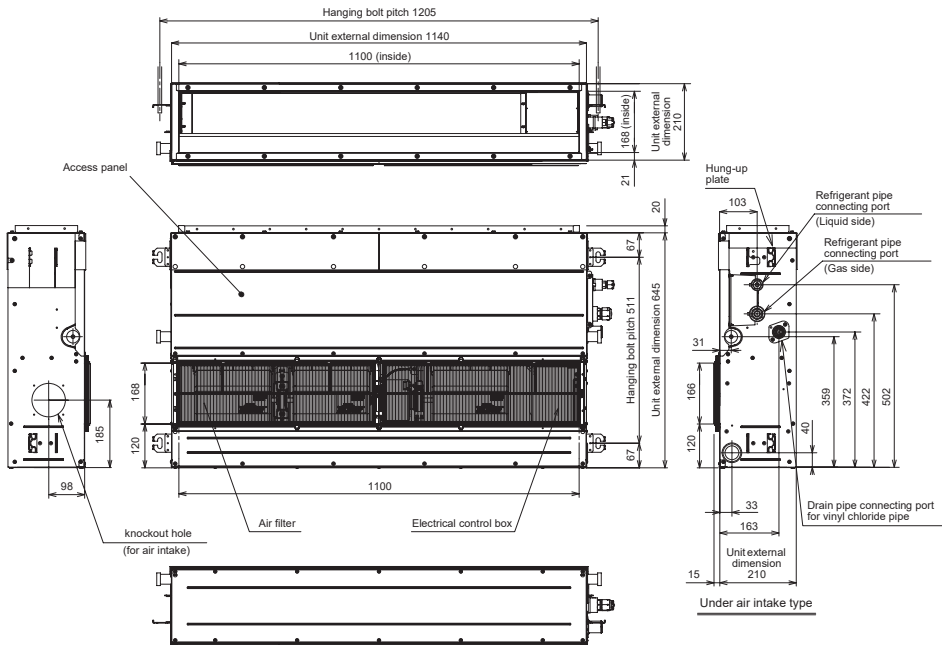


● Space required for installation and servicing

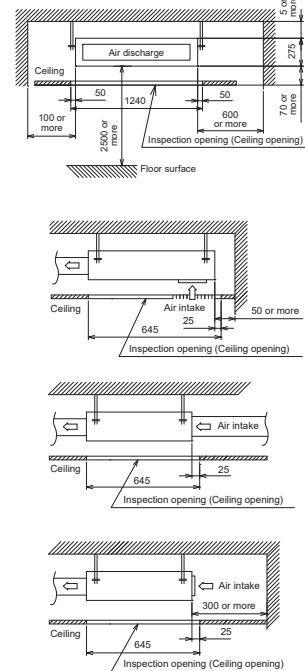


**Options**

Auxiliary fresh air flange  
TCB-FF101URE2

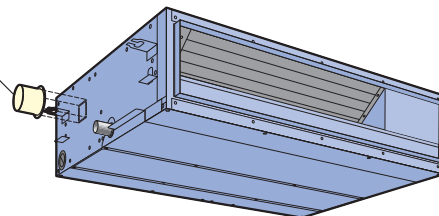

Super slim duct type


MMD-AP\*\*\*6MPHY  
MMD-AP\*\*\*6MHY(\*2)

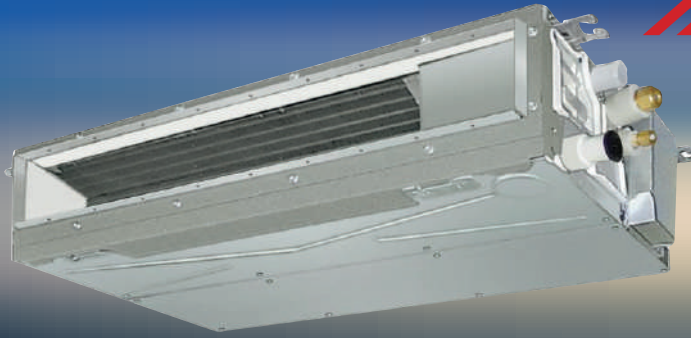


Features

- Very compact design: Only 21 cm height & 45 cm depth
- Wide range choice ( 12 capacities )
- Easy maintenance - external electrical box
- Choice with high-lift drain pump (350 mm) MPH or without drain pump MHY(\*2)

MMD-AP\*\*\*6MPHY/MMD-AP\*\*\*6MHY\*2

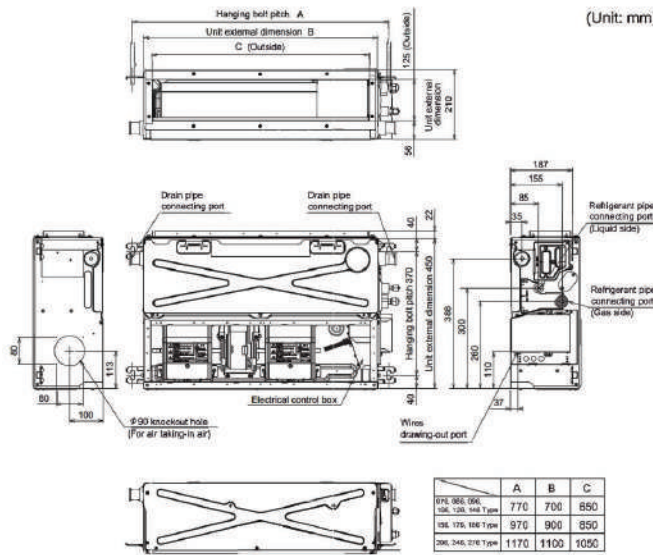

Space required for installation and servicing

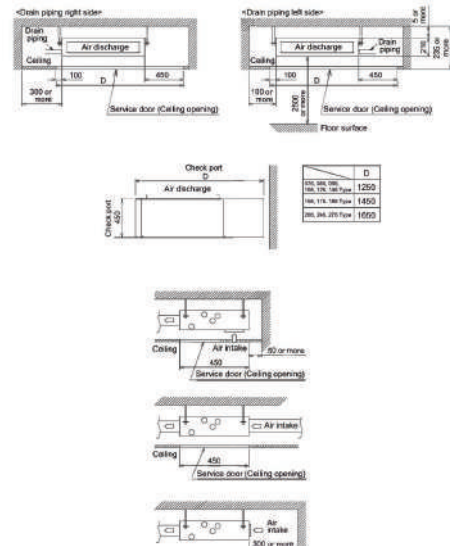

\* Standard filter needs to be purchased locally.

Technical specifications

Model name	MMD-	AP0076MPHY AP0076MHY <sup>(*)2</sup>	AP0086MPHY AP0086MHY <sup>(*)2</sup>	AP0096MPHY AP0096MHY <sup>(*)2</sup>	AP0106MPHY AP0106MHY <sup>(*)2</sup>	AP0126MPHY AP0126MHY <sup>(*)2</sup>	AP0146MPHY AP0146MHY <sup>(*)2</sup>	AP0156MPHY AP0156MHY <sup>(*)2</sup>	AP0176MPHY AP0176MHY <sup>(*)2</sup>	AP0186MPHY AP0186MHY <sup>(*)2</sup>	AP0206MPHY AP0206MHY <sup>(*)2</sup>	AP0246MPHY AP0246MHY <sup>(*)2</sup>	AP0276MPHY AP0276MHY <sup>(*)2</sup>			
Cooling capacity <sup>1</sup>	kW	2.2	2.5	2.8	3.2	3.6	4.0	4.5	5.0	5.6	6.3	7.1	8.0			
	BTU(*1.1)	7,500	8,600	9,600	11,000	12,300	13,700	15,400	17,100	19,100	21,600	24,200	27,300			
	BTU(*1.2)	7,600	8,700	9,700	11,100	12,400	13,800	15,600	17,300	19,300	21,700	24,500	27,600			
Electrical characteristics	Power requirements	1-phase 50Hz 230V (220-240V) / 1-phase 60Hz 220V (Separate power supply for indoor units required.)														
	Power consumption (AP***MPHY/AP***MHY)	kW	0.052/ 0.048	0.052/ 0.048	0.052/ 0.048	0.052/ 0.048	0.058/ 0.054	0.058/ 0.054	0.066/ 0.062	0.066/ 0.062	0.066/ 0.062	0.069/ 0.065	0.076/ 0.072	0.076/ 0.072		
External dimensions	Height	mm	210													
	Width	mm	700				900				1100					
	Depth	mm	450													
Total weight	kg	19				22				25						
	Fan unit	Standard air flow (High/Mid/Low)	m <sup>3</sup> /h	570/475/380				610/500/385				780/580/420				1000/ 870/740
Motor output		W	95													
External static pressure		Pa	10-20-35-45 (4 steps)													
Connecting pipe	Gas side	mm	ø9.5				ø12.7				ø15.9					
	Liquid side	mm	ø6.4								ø9.5					
	Drain port (nominal dia.)	mm	25 (Polyvinyl chloride tube)													
Sound pressure level <sup>2</sup> (High/Mid/Low)	Under air inlet	dB(A)	41/35/30				43/36/30				41/34/27				43/40/37	45/41/38
	Back air inlet	dB(A)	33/29/25				35/29/25				33/27/22				37/33/30	38/34/31

Notes: (\*1) The cooling capacities are measured under the conditions specified by JIS B 8615 based on the reference piping

The reference piping consists of 5 m of main piping and 2.5 m of branch piping connected with 0 m height

(\*1.1) Indoor air temperature 27.0°C DB/ 19.0°C WB, outdoor air temperature 35.0°C DB

(\*1.2) Indoor air temperature 27.0°C DB/ 19.5°C WB, outdoor air temperature 35.0°C DB

(\*2) Without drain pump

Note: The sound level are measured in an anechoic chamber in accordance with JIS B 8616

Normally, the values measured in the actual operating environment become larger than the indicated values due to the effects of external sound



**SMMS -7 VRF**  
Air Conditioning for large building.



**Concealed duct high static pressure type**



**MMD-AP\*\*\*6HP-T**

**Design flexibility**

Satisfies all your design needs.  
Compatible with external static pressures up to 250 Pa.

Can be equipped with the following options:

- Long life filter kit
- Drain pump kit

\*Built-in Drain-pump : AP0186HP-T to AP0566HP-T model

**Construction characteristics**

Seven-stage-switchable static pressure.

The flexible duct is accessible.

Easy service and installation.

Inspection hole enables easy access and maintenance.

**Technical specifications**

Model name	MMD-	AP0186HP-T <sup>*2</sup>	AP0246HP-T <sup>*2</sup>	AP0276HP-T <sup>*2</sup>	AP0366HP-T <sup>*2</sup>	AP0486HP-T <sup>*2</sup>	AP0566HP-T <sup>*2</sup>	AP0726HP-T	AP0966HP-T	
Cooling capacity <sup>*1</sup>	(kW)	5.6	7.1	8.0	11.2	14.0	16.0	22.4	28.0	
	BTU(*1.1)	19,100	24,200	27,300	38,200	47,800	54,600	76,400	95,500	
	BTU(*1.2)	19,300	24,500	27,600	38,600	48,400	55,300	77,300	96,700	
Electrical characteristics	Power requirements	1-phase 50Hz 230V (220-240V) / 1-phase 60Hz 220V (Separate power supply for indoor units required.)								
	Power consumption 50 Hz/60 Hz (kW)	0.085/0.085	0.115/0.115		0.198/0.198	0.230/0.230	0.290/0.290	0.540/0.540	0.790/0.790	
External dimensions	Height (mm)	298						448		
	Width (mm)	1,000			1,400			1,400		
	Depth (mm)	750						900		
Total weight (kg)		34			43			97		
Fan unit	Standard air flow (Med./Low) (m <sup>3</sup> /h)	800 (660/550)	1,200 (970/800)		1,920 (1,560/1,340)	2,100 (1,740/1,420)	2,400 (2,040/1,660)	3,800 (3,200/2,500)	4,800 (4,200/3,500)	
	Motor output (W)	250			350			250		
	External static pressure (factory setting) (Pa)	100						150		
	External static pressure (Pa)	50-75-125-150-175-200 (7steps)						50-83-117-150-183-217-250 (7step)		
Connecting pipe	Gas side (mm)	ø12.7	ø15.9			ø22.2				
	Liquid side (mm)	ø6.4	ø9.5			ø12.7				
	Drain port (nominal dia.)	25 (Polyvinyl chloride tube)						25 (Polyvinyl chloride tube)		
Sound pressure level* (High/Mid/Low) (dB(A))		37 (32/30)	38 (34/31)		41 (37/34)	42 (40/35)	45 (42/37)	44 (40/36)	46 (42/38)	

Notes: (\*1) The cooling capacities are measured under the conditions specified by JIS B 8615 based on the reference piping  
The reference piping consists of 5 m of main piping and 2.5 m of branch piping connected with 0 m height

(\*1.1) Indoor air temperature 27.0°C DB/ 19.0°C WB, outdoor air temperature 35.0°C DB

(\*1.2) Indoor air temperature 27.0°C DB/ 19.5°C WB, outdoor air temperature 35.0°C DB

(\*2) Built-in drain pump AP0186HP-T to AP0566HP-T model

Note: The sound level are measured in an anechoic chamber in accordance with JIS B 8616


Normally, the values measured in the actual operating environment become larger than the indicated values due to the effects of external sound





Concealed duct type

MMD-AP\*\*\*6BHP-T

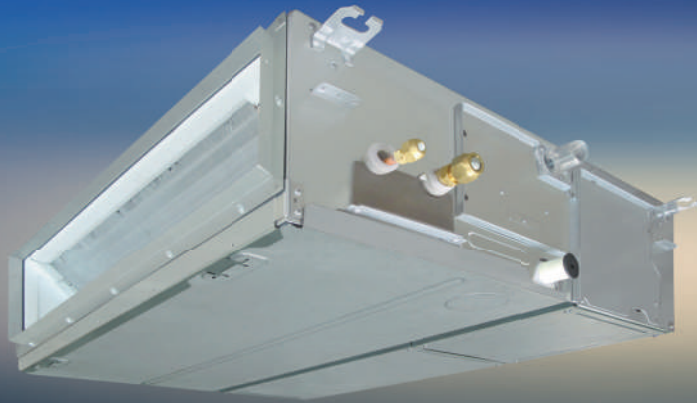

High static pressure

External static pressure can be raised as high as 120 Pa, so that all areas of the room can be reached for even temperature distribution, no matter how complex the layout.

High-lift drain pump

Built-in high-lift drain pump up to 850 mm.

Technical specifications

Model name	MMD-	AP0076BHP-T	AP0096BHP-T	AP0126BHP-T	AP0156BHP-T	AP0186BHP-T	AP0246BHP-T	AP0276BHP-T	AP0306BHP-T	AP0366BHP-T	AP0486BHP-T	AP0566BHP-T	
Cooling capacity*1	(kW)	2.2	2.8	3.6	4.5	5.6	7.1	8.0	9.0	11.2	14.0	16.0	
	BTU(*1.1)	7,500	9,600	12,300	15,400	19,100	24,200	27,300	30,700	38,200	47,800	54,600	
	BTU(*1.2)	7,600	9,700	12,400	15,600	19,300	24,500	27,600	31,000	38,600	48,400	55,300	
Electrical characteristics	Power requirements	1-phase 50Hz 230V (220-240V) / 1-phase 60Hz 220V (Separate power supply for indoor units required.)											
	Power consumption 50 Hz/60 Hz (kW)	0.038/0.038	0.043/0.043	0.062/0.062	0.077/0.077	0.094/0.094	0.172/0.172	0.198/0.198					
External dimension	Height (mm)	275											
	Width (mm)	700			700			1,000			1,400		
	Depth (mm)	750											
Total weight (kg)	23			30			40						
Fan unit	Standard air flow (Mid/Low) (m <sup>3</sup> /h)	540/450/360	570/480/390	798/660/540	1,200/990/870	1,260/1,110/930	1,920/1,620/1,380	2,100/1,740/1,500					
	Motor output (W)	150											
	External static pressure (factory setting) (Pa)	30			40			50					
	External static pressure (Pa)	30-40-50-65-80-100-120 (7 steps)											
Connecting pipe	Gas side (mm)	ø9.5			ø12.7			ø15.9					
	Liquid side (mm)	ø6.4						ø9.5					
	Drain port (nominal dia.)	25 (Polypropylene tube)											
Sound pressure level* (High/Mid/Low) (dB(A))	29/26/23	30/26/23	33/29/25	36/31/27	40/36/33								

Notes: (\*1) The cooling capacities are measured under the conditions specified by JIS B 8615 based on the reference piping. The reference piping consists of 5 m of main piping and 2.5 m of branch piping connected with 0 m height.


(\*1.1) Indoor air temperature 27.0°C DB/ 19.0°C WB, outdoor air temperature 35.0°C DB

(\*1.2) Indoor air temperature 27.0°C DB/ 19.5°C WB, outdoor air temperature 35.0°C DB

Note: The sound level are measured in an anechoic chamber in accordance with JIS B 8616

Normally, the values measured in the actual operating environment become larger than the indicated values due to the effects of external sound

## MMD-AP0076BHP-T to AP0566BHP-T

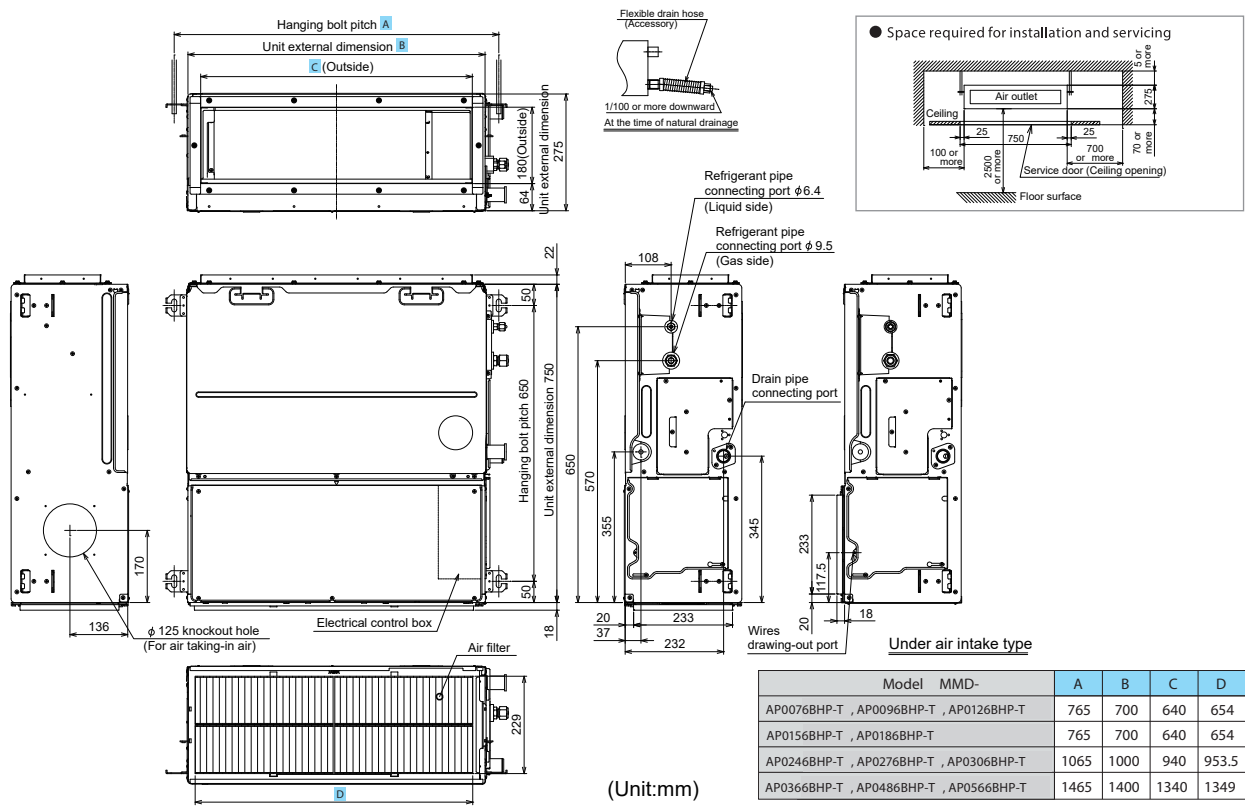



\* Standard filter is provided, but deeper filtration filter needs to be purchased locally.

## Options

Spigot shaped flange

- TCB-SF56C6BPE
- TCB-SF80C6BPE
- TCB-SF160C6BPE

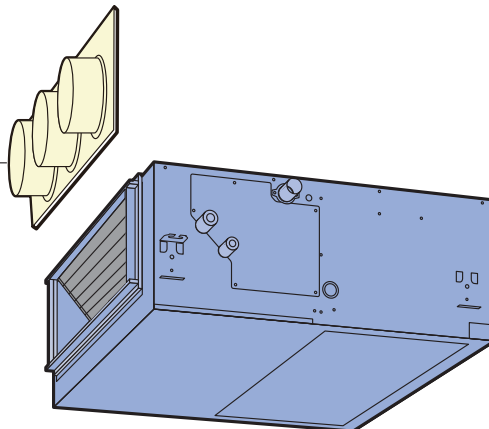

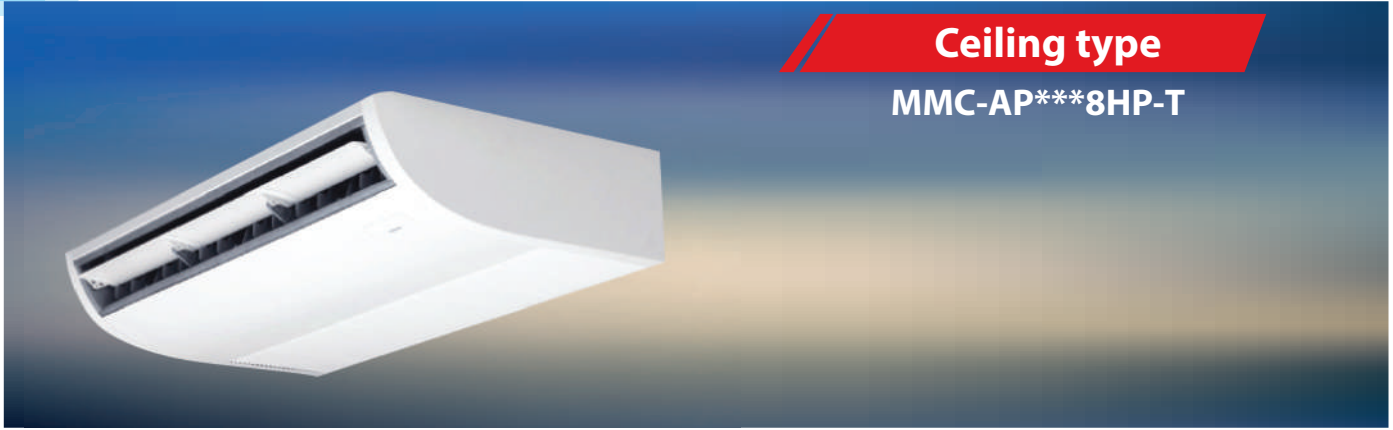


**Ceiling type**  
**MMC-AP\*\*\*8HP-T**

**Smooth curve for pliant shape**


All-new chassis and new rounded design, This new models have been developed in response to customers' needs for ceiling units that better match their room interiors.

New fan has adopted the turbulence prevention rib to optimize the ventilating way. Air volume has increased and noise level also has decreased compared with previous model. Winds of new ceiling type of 4HP to 6HP can be reached up to 4.3 metre

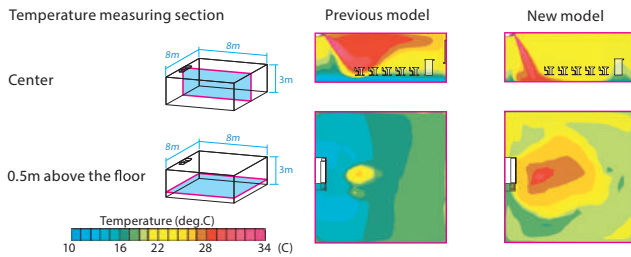

**New designed wide flap**

The new air outlet has realized both high noise reduction and large air volume.

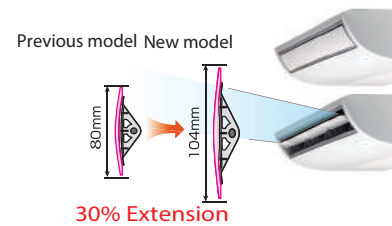

**Flap control**






The airflow angle is automatically set to the most suitable setting according to your cooling or heating needs, and an automatic swing mode enables airflow to reach all areas of the room to create a comfortable ambience.

**Technical specifications**

Model name	MMC-	AP0158HP-T	AP0188HP-T	AP0248HP-T	AP0278HP-T	AP0368HP-T	AP0488HP-T	AP0568HP-T
Cooling capacity*1	(kW)	4.5	5.6	7.1	8.0	11.2	14.0	16.0
	BTU(*1.1)	15,400	19,100	24,200	27,300	38,200	47,800	54,600
	BTU(*1.2)	15,600	19,300	24,500	27,600	38,600	48,400	55,300
Electrical characteristics	Power requirements	1-phase 50Hz 230V (220-240V) / 1-phase 60Hz 220V (Separate power supply for indoor units required.)						
	Power consumption 50 Hz/60 Hz (kW)	0.033/0.033	0.034/0.034	0.067/0.067		0.083/0.083		0.111/0.111
External dimensions	Height (mm)	235						
	Width (mm)	950		1,269		1,586		
	Depth (mm)	690						
Total weight (kg)	24		30		37			
Fan unit	Standard air flow (High/Mid/Low) (m <sup>3</sup> /h)	840 /690/540	960 /720/540	1440 /1020/750		1860 /1350/1020	1860 /1530/1200	2040 /1650/1260
	Motor (W)	94		94		139		
Connecting pipe	Gas side (mm)	ø12.7		ø15.9				
	Liquid side (mm)	ø6.4		ø9.5				
	Drain port (nominal dia.)	20 (Polyvinyl chloride tube)						
Sound pressure level* (High/Mid/Low) (dB(A))	36/34/28		37/35/28		41/36/29		44/38/32	
		44/41/35		46/42/36				


Notes: (\*1) The cooling capacities are measured under the conditions specified by JIS B 8615 based on the reference piping. The reference piping consists of 5 m of main piping and 2.5 m of branch piping connected with 0 m height. (\*1.1) Indoor air temperature 27.0°C DB/ 19.0°C WB, outdoor air temperature 35.0°C DB. (\*1.2) Indoor air temperature 27.0°C DB/ 19.5°C WB, outdoor air temperature 35.0°C DB. Note: The sound level are measured in an anechoic chamber in accordance with JIS B 8616. Normally, the values measured in the actual operating environment become larger than the indicated values due to the effects of external sound.

## MMC-AP0158HP-T to AP0568HP-T

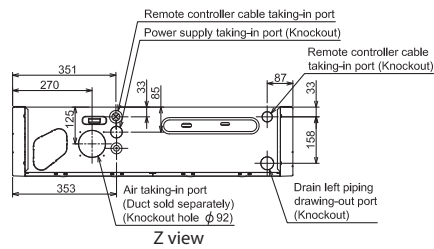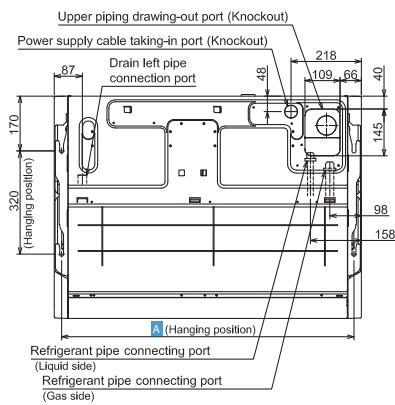

Wireless sensor mounting section


### ● Space required for installation and servicing

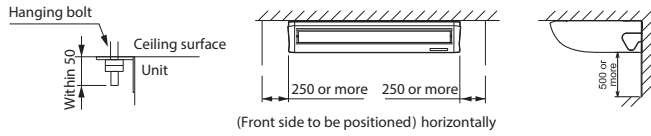

Model	MMC-	A	B
AP0158HP-T, AP0188HP-T		906	950
AP0248HP-T, AP0278HP-T		1,223	1,270
AP0368HP-T, AP0488HP-T, AP0568HP-T		1,540	1,586


(Unit: mm)

## Options

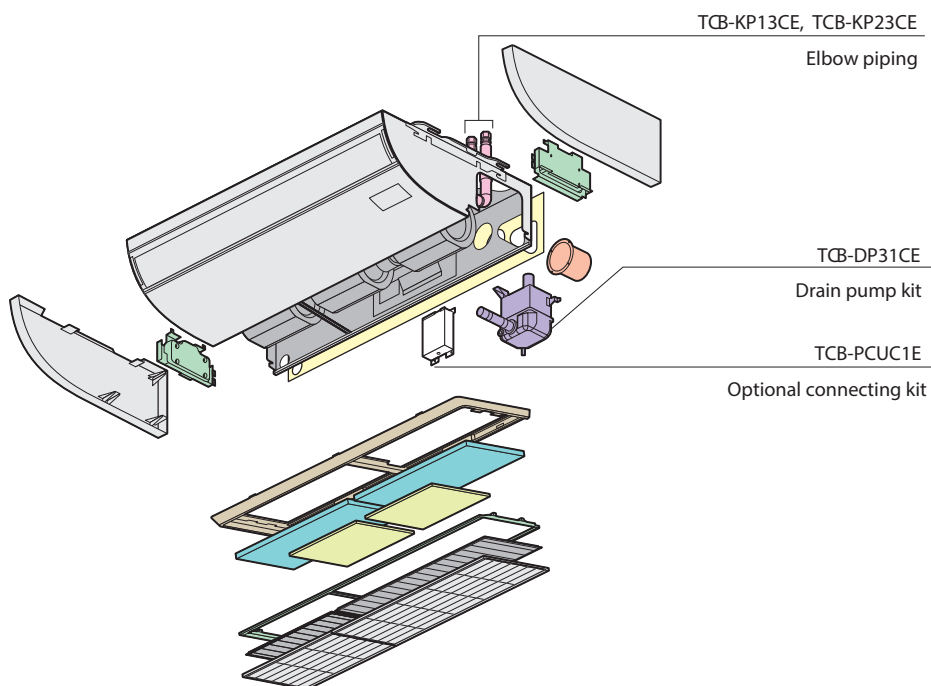

High-wall type (series 3)

MMK-AP\*\*\*3H-T

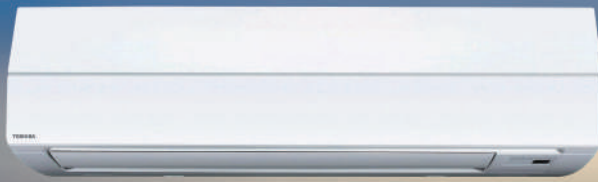

Elegant and slim

This classic high-wall is elegant and slim; it can easily blend in with any room interior.


Total comfort is granted, thanks also to the 70° directional auto-swing louver that provides uniform air distribution.



Remote controller

\* Wireless remote controller is packed with indoor unit.

MMK-AP0073H-T to AP0243H-T

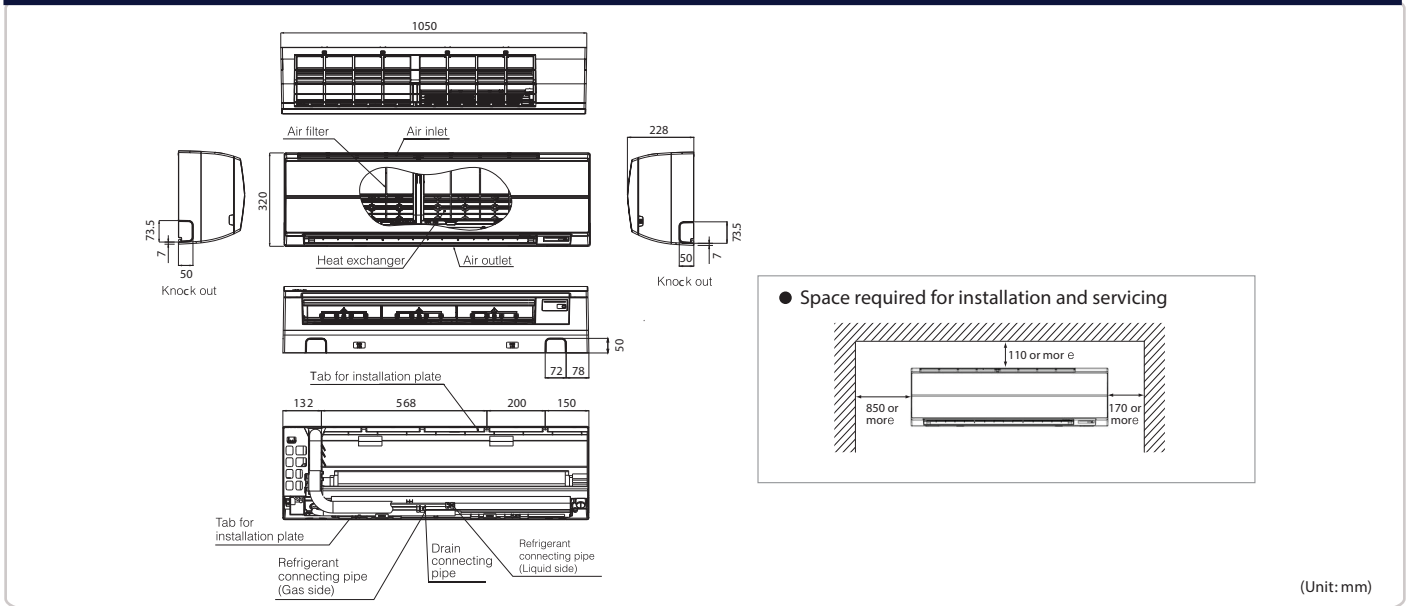

(Unit: mm)

Technical specifications

Model name	MMK-	AP0073H-T	AP0093H-T	AP0123H-T	AP0153H-T	AP0183H-T	AP0243H-T
Cooling capacity*1	(kW)	2.2	2.8	3.6	4.5	5.6	7.1
	BTU(*1.1)	7,500	9,600	12,300	15,400	19,100	24,200
	BTU(*1.2)	7,600	9,700	12,400	15,600	19,300	24,500
Electrical characteristics	Power requirements	1-phase 50Hz 230V (220-240V) (Separate power supply for indoor units required.)					
	Power consumption 50 Hz/60 Hz	(kW)	0.018/0.018	0.021/0.021	0.043/0.043	0.050/0.050	
External dimensions	Height	(mm)	320				
	Width	(mm)	1050				
	Depth	(mm)	228				
Total weight	(kg)	15					
Fan unit	Standard air flow (High/Mid/Low)	(m <sup>3</sup> /h)	570/450/390	600/480/390	840/660/540	1020/750/570	
	Motor output	(W)	30				
Connecting pipe	Gas side	(mm)	ø9.5		ø12.7		ø15.9
	Liquid side	(mm)	ø6.4				ø9.5
	Drain port	(nominal dia.)	16 (polyvinyl chloride tube)				
Sound pressure level* (High/Mid/Low)	(dB(A))	35/31/28	37/32/28	41/36/33	46/39/34		

Notes: (\*1) The cooling capacities are measured under the conditions specified by JIS B 8615 based on the reference piping  
The reference piping consists of 5 m of main piping and 2.5 m of branch piping connected with 0 m height

(\*1.1) Indoor air temperature 27.0°C DB/ 19.0 °C WB, outdoor air temperature 35.0 °C DB


(\*1.2) Indoor air temperature 27.0°C DB/ 19.5 °C WB, outdoor air temperature 35.0 °C DB

Note: The sound level are measured in an anechoic chamber in accordance with JIS B 8616

Normally, the values measured in the actual operating environment become larger than the indicated values due to the effects of external sound

High wall type (series 7)

MMK-AP\*\*\*7HP-T

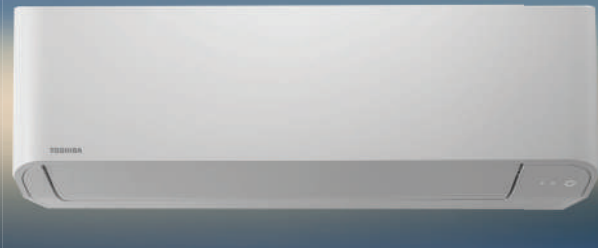

Compact and aesthetic design


Glossy material, smooth, curve and white LED are designed to reflect luxurious appearance and to complement modern exterior beautifully.



Remote controller

\* Wireless remote controller is packed with indoor unit.

MMK-AP0077HP-T to MMK-AP0247HP-T

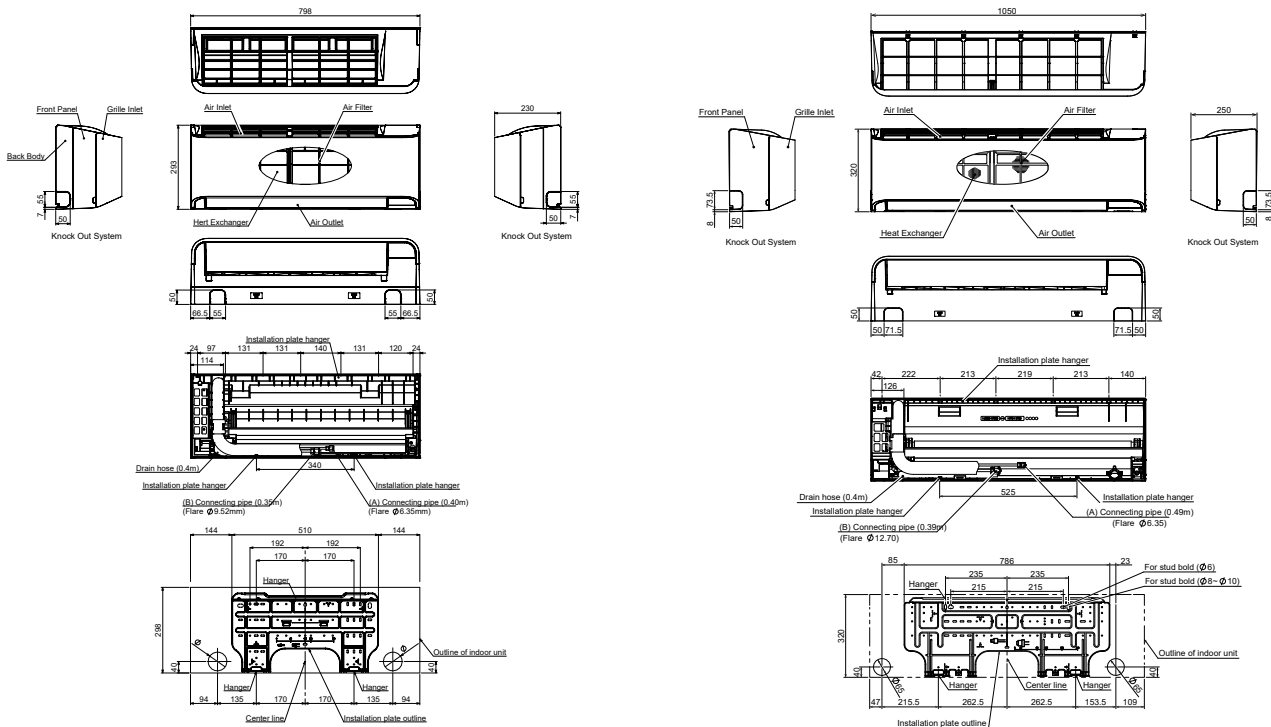

Technical specifications

Model name	MMK-	AP0077HP-T	AP0097HP-T	AP0127HP-T	AP0157HP-T	AP0187HP-T	AP0247HP-T	
Cooling Capacity <sup>1</sup>	(kW)	2.2	2.8	3.6	4.5	5.6	7.1	
Electrical characteristics	Power requirements	1-phase 50Hz 230V (220-240V) / 1-phase 60Hz 220V (208V-230V) (Separate power supply for indoor units required.)						
	Power consumption 50 Hz	(kW)	0.015	0.016	0.017	0.028	0.032	0.050
External dimensions	Height	(mm)	293			320		
	Width	(mm)	798			1050		
	Depth	(mm)	230			250		
Total weight	(kg)	11			16			
Fan unit	Standard air flow (High/Mid/Low)	(m <sup>3</sup> /h)	480/385/270	510/395/270	540/410/300	840/690/550	900/720/550	1200/900/600
	Motor output	(W)	30					
Connecting pipe	Gas side	(mm)	ø9.5			ø12.7		ø15.8
	Liquid side	(mm)	ø6.4					
	Drain port (nominal dia. mm)		16 (Polyvinyl chloride tube)					
Sound pressure level <sup>2</sup> (High/Mid/Low)	(dB(A))	35/30/25	36/31/25	37/32/25	40/36/32	41/37/32	45/39/33	

Note 1 : The capacities are measured under the conditions specified by JIS B 8615 based on the reference piping. The reference piping consists of 5 m of main piping and 2.5 m of branch piping connected with 0 m height.

Note 2 : The sound level are measured in an anechoic chamber in accordance with JIS B 8616.

Normally, the values measured in the actual operating environment become larger than the indicated values due to the effects of external sound.


Note : Rated conditions Cooling : Indoor air temperature 27°C DB/19°C WB, Outdoor air temperature 35°C DB




**Floor standing concealed type**

**MML-AP\*\*\*4BH1-E**

- ◀ **Cool air makes for a pleasant indoor environment**  
Install it under a window and air-condition any room effectively.
- ◀ **Easy maintenance**  
Simplified design of fan and drainage pipe eases maintenance.

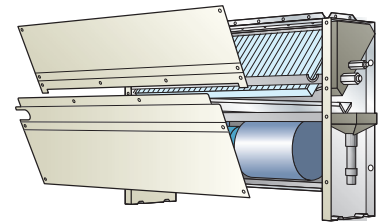

**MML-AP0074BH1-E to AP0244BH1-E**

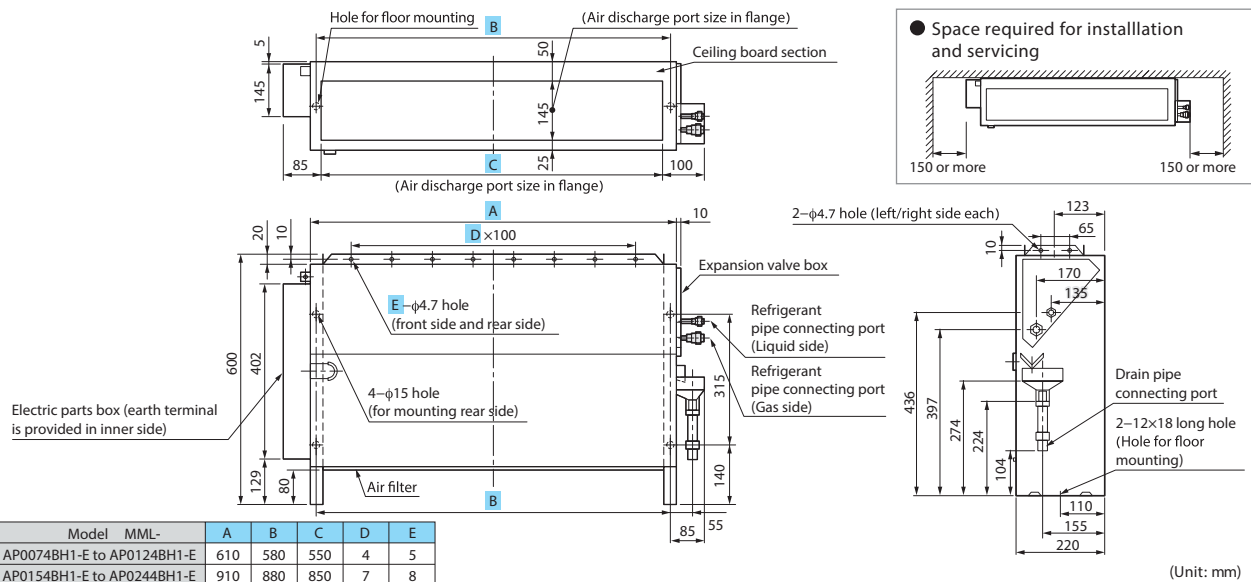

**Technical specifications**

Model name	MML-	AP0074BH1-E	AP0094BH1-E	AP0124BH1-E	AP0154BH1-E	AP0184BH1-E	AP0244BH1-E
Cooling capacity*1	(kW)	2.2	2.8	3.6	4.5	5.6	7.1
	BTU(*1.1)	7,500	9,600	12,300	15,400	19,100	24,200
	BTU(*1.2)	7,600	9,700	12,400	15,600	19,300	24,500
Electrical characteristics	Power requirements	1-phase 50Hz 230V (220-240V) / 1-phase 60Hz 220V (Separate power supply for indoor units required.)					
	Power consumption 50 Hz/60 Hz (kW)	0.056/0.058			0.090/0.096		0.095/0.110
External dimensions	Height (mm)				600		
	Width (mm)	74					045
	Depth (mm)				220		
Total weight (kg)		21			29		
Fan unit	Standard air flow (High/Mid/Low) (m <sup>3</sup> /h)	460/400/300			740/600/490		950/790/640
	Motor output (W)	19			70		
Connecting pipe	Gas side (mm)	ø9.5			ø12.7		ø15.9
	Liquid side (mm)				ø6.4		ø9.5
	Drain port (nominal dia.)				20 (Polyvinyl chloride tube)		
Sound pressure level* (High/Mid/Low) (dB(A))		36/34/3					2/37/33

Notes: (\*1) The cooling capacities are measured under the conditions specified by JIS B 8615 based on the reference piping  
The reference piping consists of 5 m of main piping and 2.5 m of branch piping connected with 0 m height  
(\*1.1) Indoor air temperature 27.0°C DB/ 19.0°C WB, outdoor air temperature 35.0°C DB  
(\*1.2) Indoor air temperature 27.0°C DB/ 19.5°C WB, outdoor air temperature 35.0°C DB  
Note: The sound level are measured in an anechoic chamber in accordance with JIS B 8616  
Normally, the values measured in the actual operating environment become larger than the indicated values due to the effects of external sound



**Floor standing cabinet type**


**MML-AP\*\*\*4H1-E**




**Slim & compact design**

Under-window mounting does not block lighting.  
Indoor unit size of 2.2 kW to 7.1 kW is the same.  
Distribution can be reversed to suit occupant preference.





Air blow from front panel  
(factory default)



Air blow from top



**MML-AP0074H1-E to AP0244H1-E**

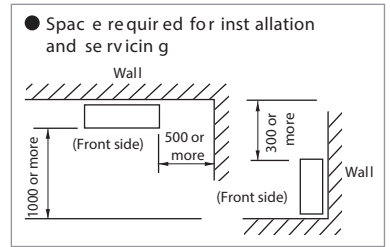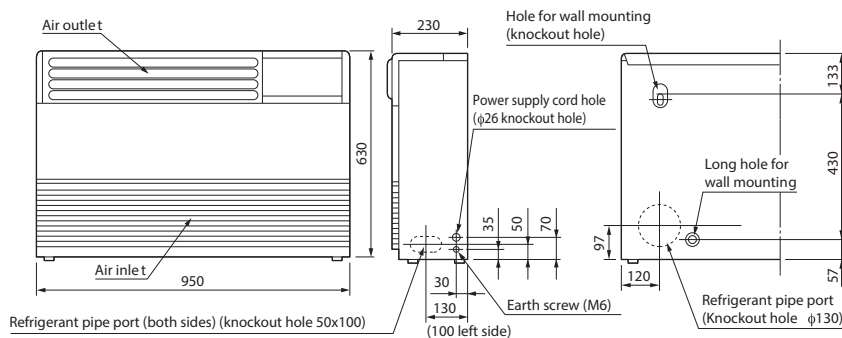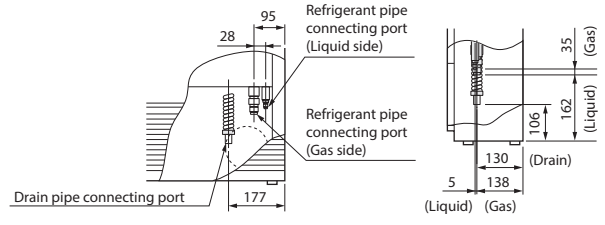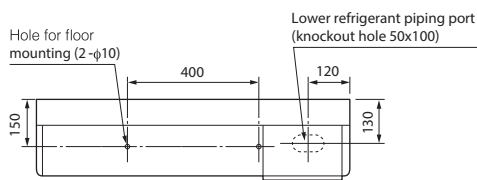

(Unit: mm)

**Technical specifications**

Model name	MML-	AP0074H1-E	AP0094H1-E	AP0124H1-E	AP0154H1-E	AP0184H1-E	AP0244H1-E
Cooling capacity*1	(kW)	2.2	2.8	3.6	4.5	5.6	7.1
	BTU(*1.1)	7,500	9,600	12,300	15,400	19,100	24,200
	BTU(*1.2)	7,600	9,700	12,400	15,600	19,300	24,500
Electrical characteristics	Power requirements	1-phase 50Hz 230V (220-240V) / 1-phase 60Hz 220V (Separate power supply for indoor units required.)					
	Power consumption 50 Hz/60 Hz	(kW)	0.056/0.053		0.092/0.092		0.102/0.113
External dimensions	Height	(mm)	630				
	Width	(mm)	950				
	Depth	(mm)	230				
Total weight	(kg)	37				40	
Fan unit	Standard air flow (High/Mid/Low)	(m <sup>3</sup> /h)	480/420/360		900/780/650		1080/930/780
	Motor output	(W)	45				70
Connecting pipe	Gas side	(mm)	ø9.5		ø12.7		ø15.9
	Liquid side	(mm)	ø6.4				ø9.5
	Drain port	(nominal dia.)	20 (Polyvinyl chloride tube)				
Sound pressure level* (High/Mid/Low)	(dB(A))	39/37/35		45/41/38		49/44/39	

Notes: (\*1) The cooling capacities are measured under the conditions specified by JIS B 8615 based on the reference piping

The reference piping consists of 5 m of main piping and 2.5 m of branch piping connected with 0 m height

(\*1.1) Indoor air temperature 27.0°C DB/ 19.0°C WB, outdoor air temperature 35.0°C DB

(\*1.2) Indoor air temperature 27.0°C DB/ 19.5°C WB, outdoor air temperature 35.0°C DB

Note: The sound level are measured in an anechoic chamber in accordance with JIS B 8616

Normally, the values measured in the actual operating environment become larger than the indicated values due to the effects of external sound



**Console type**  
**MML-AP\*\*\*4NH1-E**

**Elegant & simple design**


Elegant & simple design makes this unit a perfect fit for shops, office buildings, and luxury apartments. Multi-function operation is convenient, making adjustments by the user possible using the wireless remote controller.



Remote controller

\* Wireless remote controller is packed with indoor unit.

**MML-AP0074NH1-E to AP0184NH1-E**

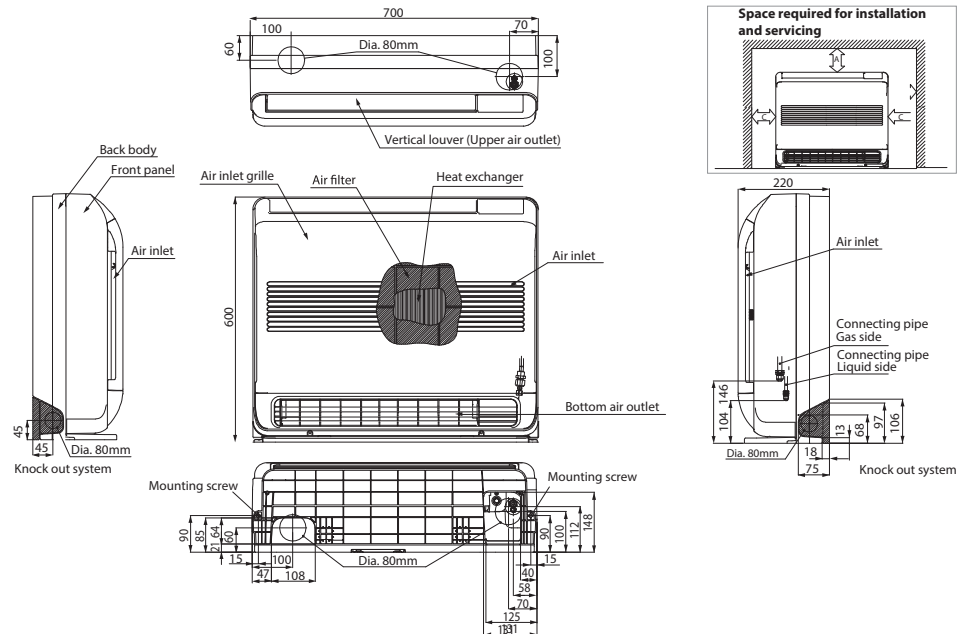

(Unit: mm)

**Technical specifications**

Model name	MML-	AP0074NH1-E	AP0094NH1-E	AP0124NH1-E	AP0154NH1-E	AP0184NH1-E
Cooling capacity*1	(kW)	2.2	2.8	3.6	4.5	5.6
	BTU(*1.1)	7,500	9,600	12,300	15,400	19,100
	BTU(*1.2)	7,600	9,700	12,400	15,600	19,300
Electrical characteristics	Power requirements	1-phase 50Hz 230V (220-240V) / 1-phase 60Hz 220V (Separate power supply for indoor units required.)				
	Power consumption 50 Hz/60 Hz (kW)	0.021/0.021		0.025/0.025	0.034/0.034	0.052/0.052
External dimensions	Height (mm)	600				
	Width (mm)	700				
	Depth (mm)	220				
Total weight (kg)	17					
Fan unit	Standard air flow (High/Mid/Low) (m <sup>3</sup> /h)	510/366/282		552/408/324	624/468/384	726/528/426
	Motor output (W)	41				
Connecting pipe	Gas side (mm)	ø9.5			ø12.7	
	Liquid side (mm)	ø6.4				
	Drain port (nominal dia.)	16 (Polyvinyl chloride tube)				
Sound pressure level* (High/Mid/Low) (dB(A))	38/32/26		40/34/29	43/37/31	47/40/34	

Notes: (\*1) The cooling capacities are measured under the conditions specified by JIS B 8615 based on the reference piping


The reference piping consists of 5 m of main piping and 2.5 m of branch piping connected with 0 m height

(\*1.1) Indoor air temperature 27.0°C DB/ 19.0°C WB, outdoor air temperature 35.0°C DB

(\*1.2) Indoor air temperature 27.0°C DB/ 19.5°C WB, outdoor air temperature 35.0°C DB

Note: The sound level are measured in an anechoic chamber in accordance with JIS B 8616

Normally, the values measured in the actual operating environment become larger than the indicated values due to the effects of external sound

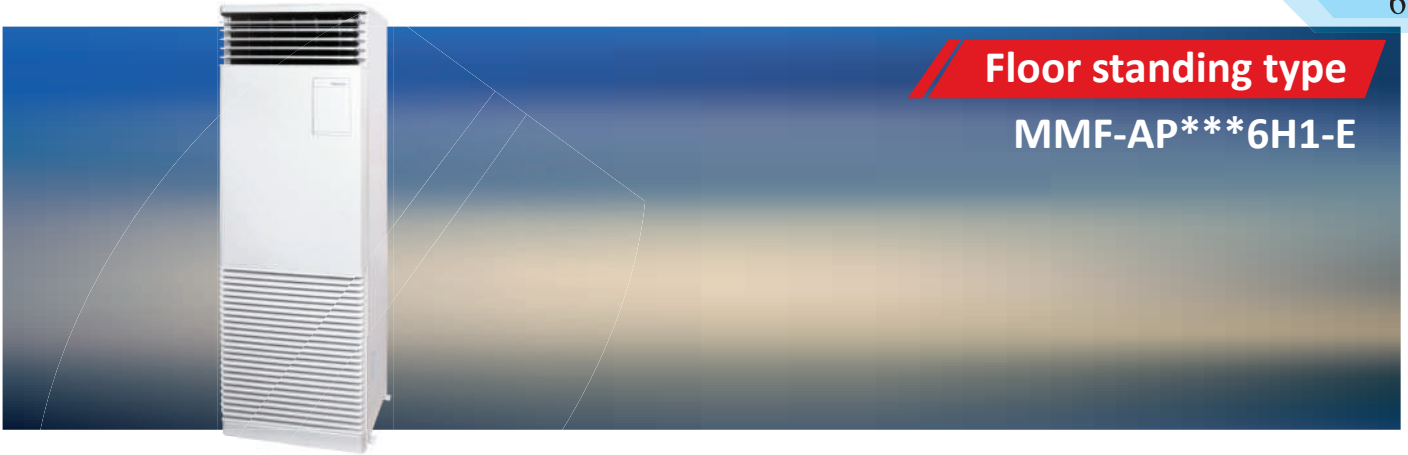


**Floor standing type**



**MMF-AP\*\*\*6H1-E**

**Wide outlet**


Corner location is also possible, with right and left auto swing. Set the vertical angle manually.

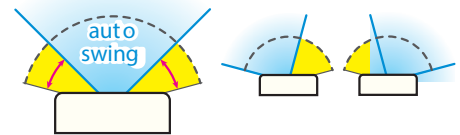

**MMF-AP0156H1-E to AP0566H1-E**

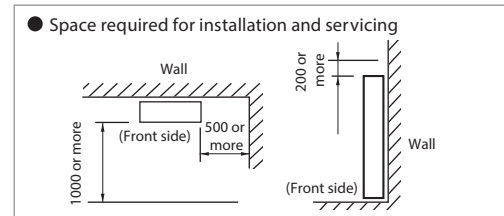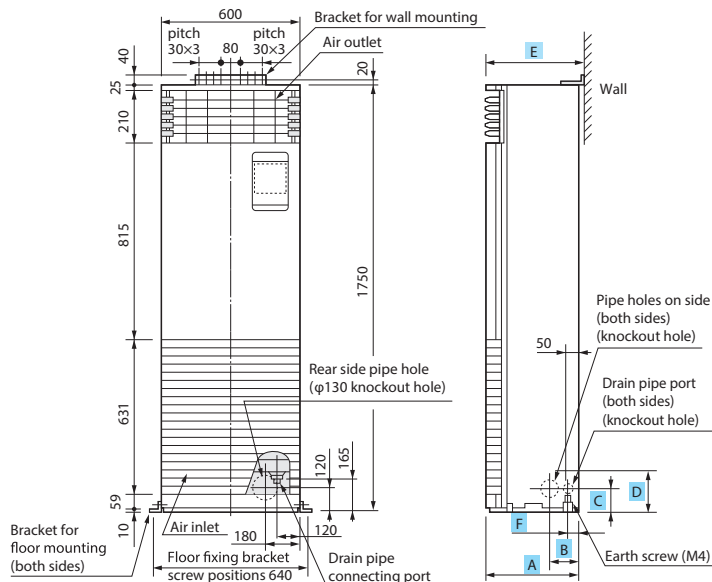

Model	MMF-	A	B	C	D	E	F
AP0156H1-E to AP0276H1-E		200	107	132	157	210	50
AP0366H1-E to AP0566H1-E		380	125	120	160	390	40

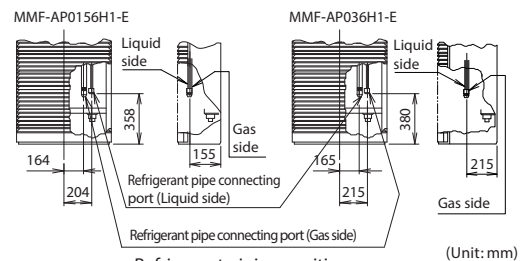

**Technical specifications**

Model name	MMF-	AP0156H1-E	AP0186H1-E	AP0246H1-E	AP0276H1-E	AP0366H1-E	AP0486H1-E	AP0566H1-E
Cooling*1	(kW)	4.5	5.6	7.1	8.0	11.2	14.0	16.0
	BTU(*1.1)	15,400	19,100	24,200	27,300	38,200	47,800	54,600
	BTU(*1.2)	15,600	19,300	24,500	27,600	38,600	48,400	55,300
Electrical characteristics	Power requirements	1-phase 50Hz 230V (220-240V) / 1-phase 60Hz 220V (Separate power supply for indoor units required.)						
	Power consumption 50 Hz/60 Hz (kW)	0.055/0.055		0.089/0.089		0.135/0.135		0.160/0.160
External dimensions	Height (mm)	1750						
	Width (mm)	600						
	Depth (mm)	210					390	
Total weight (kg)		46		47		62		
Fan unit	Standard air flow (High/Mid/Low) (m³/h)	900/780/660		1200/990/840		1920/1620/1380		2160/1730/1560
	Motor output (W)	62		62		109		109
Connecting pipe	Gas side (mm)	ø12.7			ø12.7			
	Liquid side (mm)	ø6.4			ø9.5			
	Drain port (nominal dia.)	20 (one side of male screw)						
Sound pressure level* (High/Mid/Low) (dB(A))		46/42/37		49/45/39		51/46/41		54/49/44

Notes: (\*1) The cooling capacities are measured under the conditions specified by JIS B 8615 based on the reference piping. The reference piping consists of 5 m of main piping and 2.5 m of branch piping connected with 0 m height.

(\*1.1) Indoor air temperature 27.0°C DB/ 19.0°C WB, outdoor air temperature 35.0°C DB

(\*1.2) Indoor air temperature 27.0°C DB/ 19.5°C WB, outdoor air temperature 35.0°C DB

Note: The sound level are measured in an anechoic chamber in accordance with JIS B 8616

Normally, the values measured in the actual operating environment become larger than the indicated values due to the effects of external sound


# Large capacity floor standing duct type

MMF-AP0\*\*5DHP-VA/VB MMF-AP1\*\*5DHP-VA/VB


## Floor standing <duct type>

(MMF-AP0\*\*5DHP-VA: 50 Hz ; MMF-AP1\*\*5DHP-VB: 60Hz)  
 MMF-AP0725DHP-VA/VB, MMF-AP0965DHP-VA/VB  
 MMF-AP1445DHP-VA/VB, MMF-AP1925DHP-VA/VB

MMF-AP0725DHP-VA/VB, MMF-AP0965DHP-VA/VB

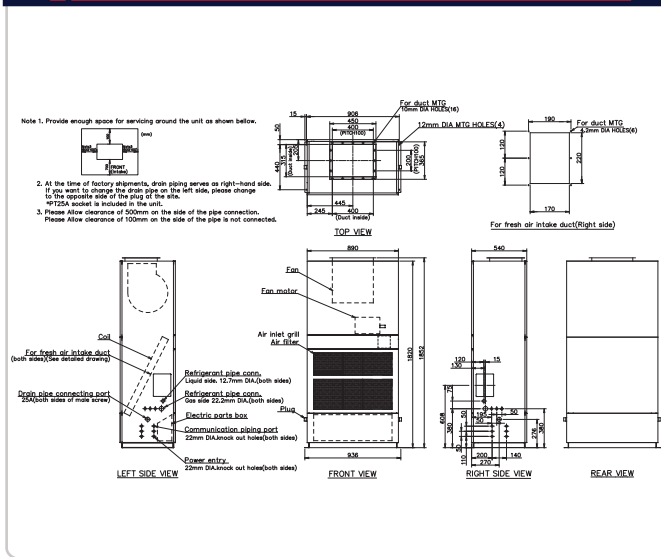

MMF-AP1445DHP-VA/VB, MMF-AP1925DHP-VA/VB

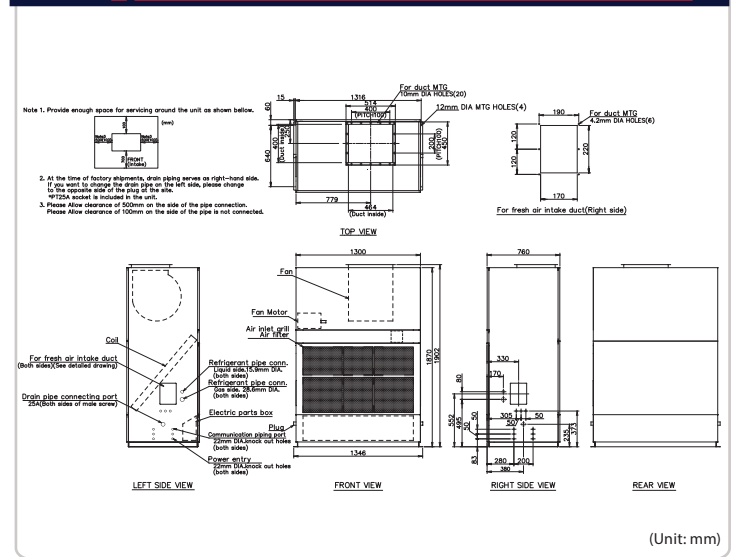

(Unit: mm)

## Technical specifications

Model name (50Hz/60Hz)		MMF-	AP0725DHP-VA/VB	AP0965DHP-VA/VB	AP1445DHP-VA/VB	AP1925DHP-VA/VB
Cooling*1	(kW)		22.4	28.0	45.0	56.0
	BTU(*1.1)		76,400	95,500	153,500	191,100
	BTU(*1.2)		77,300	96,700	155,500	193,600
Electrical characteristics	Power requirements	3 phase 50/60Hz 400V(Separate power supply for indoor units is required.)				
	Power consumption 50 Hz/ 60 Hz	(kW)	0.59/0.70	0.80/0.99	1.04/1.28	1.79/2.26
External dimensions	Height	(mm)	1820		1870	
	Width	(mm)	890		1300	
	Depth	(mm)	540		760	
Total weight	(kg)	165	170	280	290	
Fan unit*2	Standard air flow	(m <sup>3</sup> /h)	3600	4200	7200	8400
	Motor output	(kW)	1.5	1.5	2.2	3.7
	External static pressure (50Hz)	(Pa)	200	300	300	300
	Gas side	(mm)	ø22.2		ø28.6	
Connecting pipe	Liquid side	(mm)	ø12.7		ø15.9	
	Drain port	(nominal dia.)	25 (Both sides of male screw)			
Sound pressure level*	(dB(A))	59	64	66	68	

Notes: (\*1) The cooling capacities and electrical characteristics are measured under the conditions specified by JIS B 8615 based on the reference piping. The reference piping consists of 5 m of main piping and 2.5 m of branch piping connected with 0 m height.

(\*1.1) Indoor air temperature 27.0°C DB/ 19.0°C WB, outdoor air temperature 35.0°C DB  
 (\*1.2) Indoor air temperature 27.0°C DB/ 19.5°C WB, outdoor air temperature 35.0°C DB

Note: As air volume is fixed, by remote controller, air volume cannot be changed.

When required high static pressure and air volume change, a pulley change is requested.

Note: The sound level are measured in an anechoic chamber in accordance with JIS B 8616.

Normally, the values measured in the actual operating environment become larger than the indicated values due to the effects of external sound.

# Large capacity floor standing direct type



MMF-AP0\*\*5HP-VA/VB



MMF-AP1\*\*5HP-VA/VB

## Floor standing <direct type>

(MMF-AP0\*\*5HP-VA: 50 Hz ; MMF-AP1\*\*5HP-VB: 60Hz)

MMF-AP0725HP-VA/VB, MMF-AP0965HP-VA/VB

MMF-AP1445HP-VA/VB, MMF-AP1925HP-VA/VB

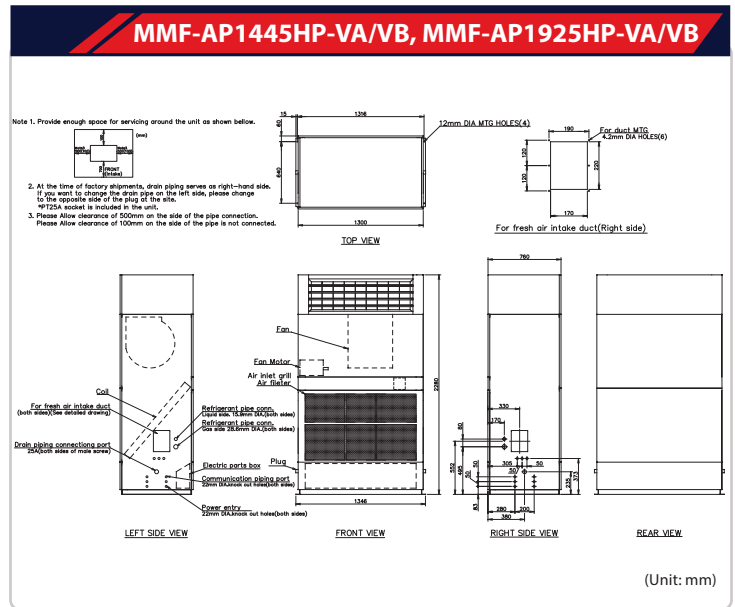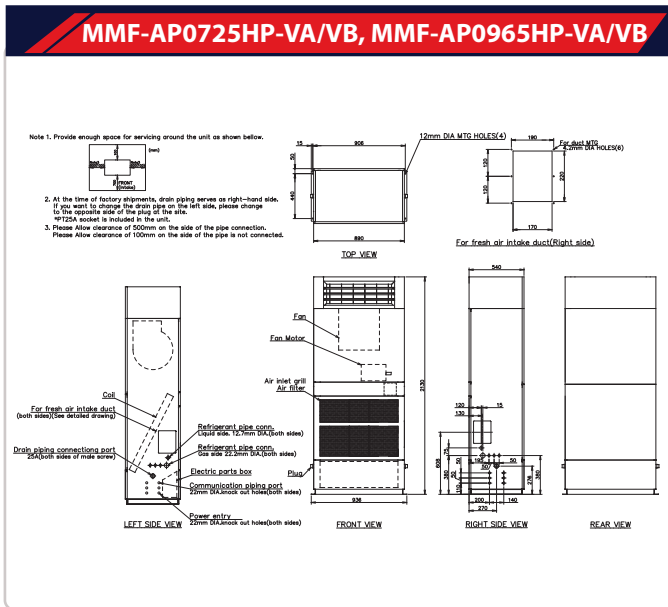

## Technical specifications

Model name (50Hz/60Hz)	MMF-	AP0725HP-VA/VB	AP0965HP-VA/VB	AP1445HP-VA/VB	AP1925HP-VA/VB
Cooling*1	(kW)	22.4	28.0	45.0	56.0
	BTU(*1.1)	76,400	95,500	153,500	191,100
	BTU(*1.2)	77,300	96,700	155,500	193,600
Electrical characteristics	Power requirements	3 phase 50Hz 400V(Separate power supply for indoor units is required.)			
	Power consumption 50 Hz/ 60 Hz (kW)	0.56/0.53	0.80/0.79	1.24/1.19	2.07/2.05
External dimensions	Height (mm)	2,130		2,280	
	Width (mm)	890		1,300	
	Depth (mm)	540		760	
Total weight (kg)		170	175	320	320
Fan unit*	Standard air flow (m <sup>3</sup> /h)	3,600	4,200	7,200	8,400
	Motor output (kW)	0.75	1.5	2.2	2.2
Connecting pipe	Gas side (mm)	ø22.2		ø28.6	
	Liquid side (mm)	ø12.7		ø15.9	
	Drain port (nominal dia.)	25 (Both sides of male screw)			
Sound pressure level*	(dB(A))	60	64	63	66

Notes: (\*1) The cooling capacities and electrical characteristics are measured under the conditions specified by JIS B 8615 based on the reference piping. The reference piping consists of 5 m of main piping and 2.5 m of branch piping connected with 0 m height

(\*1.1) Indoor air temperature 27.0°C DB/ 19.0°C WB, outdoor air temperature 35.0°C DB  
 (\*1.2) Indoor air temperature 27.0°C DB/ 19.5°C WB, outdoor air temperature 35.0°C DB

Note: As air volume is fixed, by remote controller, air volume cannot be changed  
 When required high static pressure and air volume change, a pulley change is requested

Note: The sound level are measured in an anechoic chamber in accordance with JIS B 8616  
 Normally, the values measured in the actual operating environment become larger than the indicated values due to the effects of external sound




### Key features

The Dx-coil interface enables the connection between third party AHU and TOSHIBA SMMS-7 with maximum capacity of the connectable AHU up to 60 HP for multiple Dx-coil (TA Control Type) interface and 20 HP for single Dx-coil (DDC) interface.

### Technical specifications

Dx-coil interface type		Dx-valve kit					Dx-coil interface type		Dx-coil controller		
		RBM-A101VAE		RBM-A201VAE					TA Control Type	DDC Control Type	
Model Name		RBM-A101VAE		RBM-A201VAE			Model Name		TCB-IFDTA201E	TCB-IFDDC201E	
HP		8	10	16	18	20	Power Supply		1ph 50Hz 220V - 240V / 1ph 60 Hz 220V		
Dimension	Height (mm)	420					Dimension	Height (mm)	420		
	Width (mm)	420						Width (mm)	330		
	Depth (mm)	420						Depth (mm)	95		
Weight (kg)		3.0					Weight (kg)		3.5	4.5	

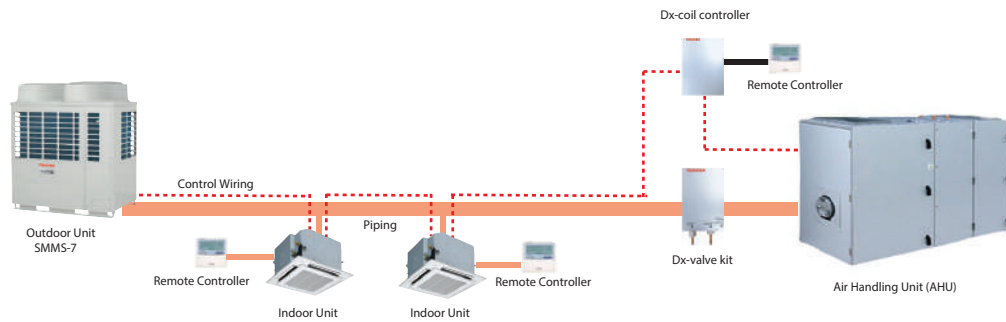


### Combination

Type of DX-COIL	TA Control Type						DDC Control Type		
	Normal			Interlaced, Split face			Normal		
	Dx-coil controller	Dx-valve kit		Dx-coil controller	Dx-valve kit		Dx-coil controller	Dx-valve kit	
Model Name	TCB-IFDTA201E	RBM-A101VAE	RBM-A201VAE	TCB-IFDTA201E	RBM-A101VAE	RBM-A201VAE	TCB-IFDDC201E	RBM-A101VAE	RBM-A201VAE
Connectable AHU Capacity	8 HP	1	1	-	-	-	1	1	-
	10 HP	1	1	-	-	-	1	1	-
	16 HP	1	-	1	2	2	-	1	1
	18 HP	1	-	1	2	2	-	1	1
	20 HP	1	-	1	2	2	-	1	1
	32 HP	1	-	2	2	-	2	-	-
	36 HP	1	-	2	2	-	2	-	-
	40 HP	1	-	2	2	-	2	-	-
	48 HP	-	-	-	3	-	3	-	-
	54 HP	-	-	-	3	-	3	-	-
60 HP	-	-	-	3	-	3	-	-	


**Operation Pattern 1: TA Control**

DX-coil controller is controlled by TA Sensor.

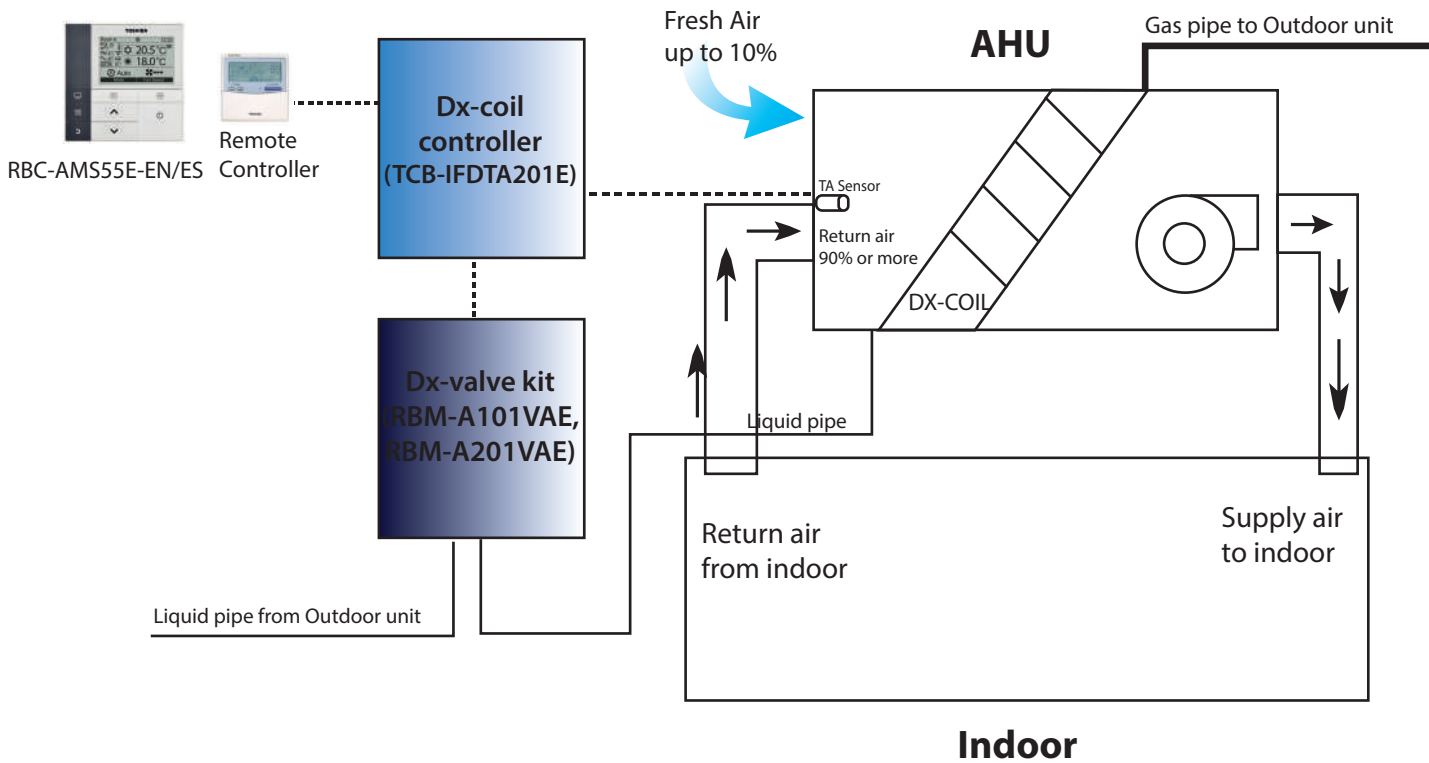

**Operation Pattern 2: DDC Control**

DX-coil controller is controlled by DDC Direction

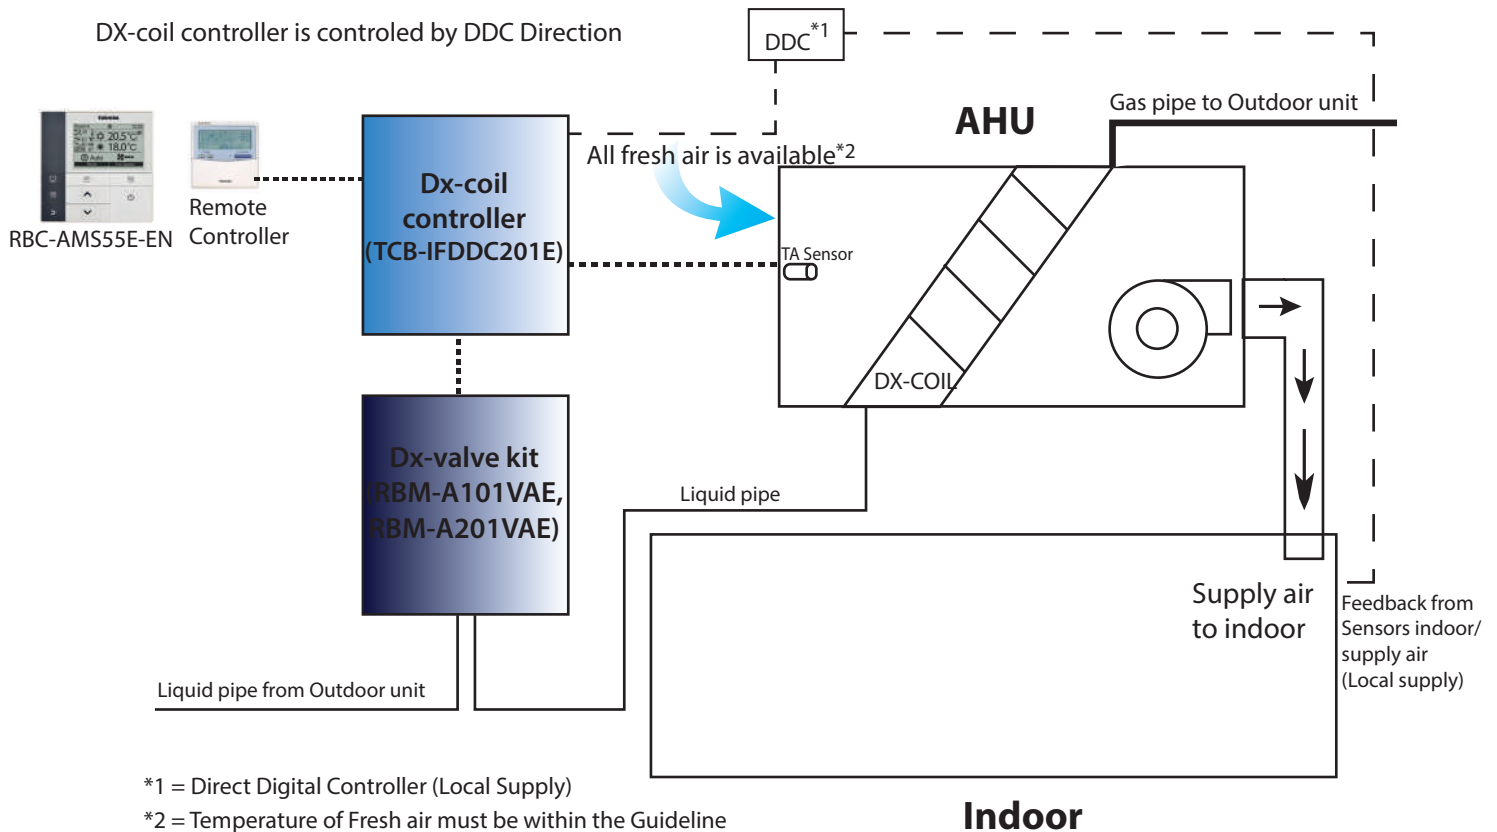

\*1 = Direct Digital Controller (Local Supply)

\*2 = Temperature of Fresh air must be within the Guideline

For more detail, please contact your local sales company.

Fresh air intake indoor unit type

MMD-AP\*\*\*HFE




**Air controller for fresh-air intake**

Fresh-air intake often influences the system, rendering normal control of the air conditioner difficult, or placing large loads on the system and its cooling performance. Therefore it is frequently adopted to handle the fresh air to a certain condition before the fresh air will enter in the main air conditioner.

This device is known as a fresh air intake indoor unit.

For some application need to get all fresh air intake connect to VRF system, SMMS-7 are available connected to 1-3 Fresh air Units up to 22 HP

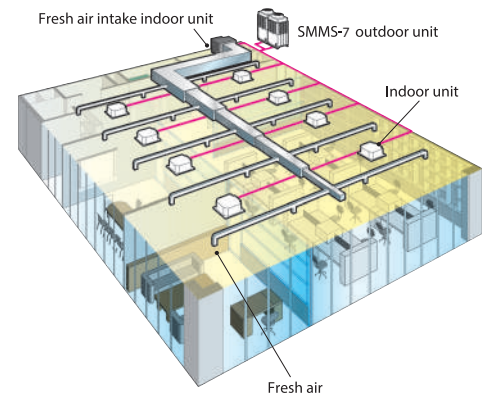

NOTE: The fresh air intake indoor unit is an air conditioner provided to handle the fresh air load and is not to control the room temperature. For correspondence to the load of the indoor air controller, set an air conditioner separately.

**Technical specifications**

Model name		MMD-	AP0481HFE	AP0721HFE	AP0961HFE
Cooling capacity*1		(kW)	14.0	22.4	28.0
		BTU(*1.1)	47,800	76,400	95,500
		BTU(*1.2)	48,400	77,300	96,700
Electrical characteristics	Power requirement	(kW)	1-phase 50 Hz 230 V (220~240 V)/60 Hz 220 V		
	Power consumption 50Hz/60Hz	(kW)	0.28/0.34	0.45/0.50	0.52/0.65
External dimensions	Main unit	Height	(mm)	492	
		Width	(mm)	892	1,392
		Depth	(mm)		1,262
Total weight		(kg)	93	144	
Fan unit	Standard air flow	(m <sup>3</sup> /h)	1,080	1,680	2,100
	Motor output	(kW)	0.160	0.160×2	
	External static pressure 50 Hz/60 Hz	(Pa)	170-210-230 / 115-215-260	140-165-180 / 150-210-235	160-190-205 / 80-180-220
	Air flow limit Lower limit/Upper limit	(m <sup>3</sup> /h)	756/1,188	1,176/1,848	1,470/2,310
Connecting pipe	Gas side	(mm)	ø15.9	ø22.2	
	Liquid side	(mm)	ø9.5	ø12.7	
	Drain port	(mm)		25	
Sound pressure level* (High/Med./Low)	(dB(A))		45/43/41	46/45/44	
Operation range	Cooling*	(°C)	5 - 43		

\* The setting temperature is 16 - 27°C (Standard FCU . . . 18 - 29°C)

\* An optional humidifier is not available with fresh air intake indoor unit

\* Height difference between fresh air intake indoor units must be within 0.5 m. Height difference between fresh air intake indoor unit and standard FCU must be within 30 m 0 m.

Notes: (\*1) The cooling capacities are measured under the conditions specified by JIS B 8615 based on the reference piping

The reference piping consists of 7.5 m of main piping with 0 m height

(\*1.1) Indoor air temperature 27.0°C DB/ 19.0°C WB, outdoor air temperature 35.0°C DB

(\*1.2) Indoor air temperature 27.0°C DB/ 19.5°C WB, outdoor air temperature 35.0°C DB

Note: Normally, the values measured in the actual operating environment become larger than the indicated values due to the effects of external sound


Note: When supply air temperature is "Setting temperature +3°C" or less, fresh air intake indoor unit operates as FAN mode

When supply air temperature is 19°C or less, fresh air intake indoor unit operates as FAN mode



Use conditions

- In COOL mode, if temperature of the fresh air is below the setup temp. of +3°C, FAN status is automatically made. When temperature of the fresh air is below 19°C, FAN status is also made regardless of the setup temperature.

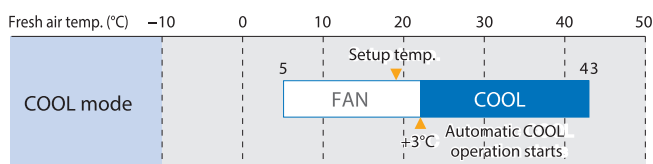






Operable mode and discharge temperature setup range

Operation mode	At shipment from factory	Setup range
COOL	18°C	16 to 27°C

MMD-AP0481HFE to AP0961HFE

Long hole for M10 hanging bolt


Type	Hole dia.-Width x Length
0481	4-φ12 x 40
0721, 0961	4-φ12 x 92

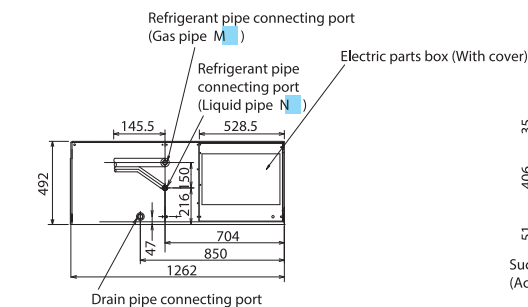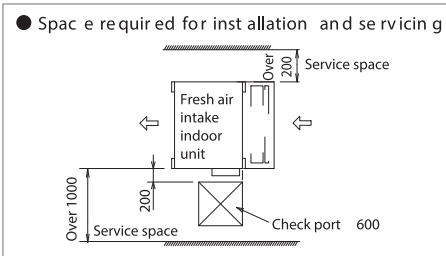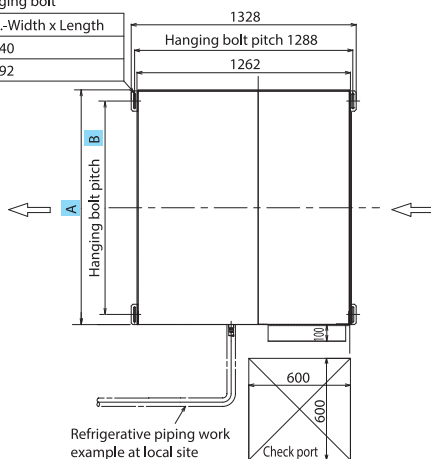

Model MMD-	A	B	C	D	E	F	G	H	I	J	K	L	M	N
AP0961HFE	1392	1260	250	250	250	250	250	250	250	250	10-M6	10-M6	φ22.2 brazing	φ12.7 flare
AP0721HFE	1392	1260	250	250	250	250	250	250	250	250	10-M6	10-M6	φ22.2 brazing	φ12.7 flare
AP0481HFE	892	810	215	107.5	107.5	215	—	250	250	—	8-M6	6-M6	φ15.9 flare	φ9.5 flare


(Unit: mm)

Options

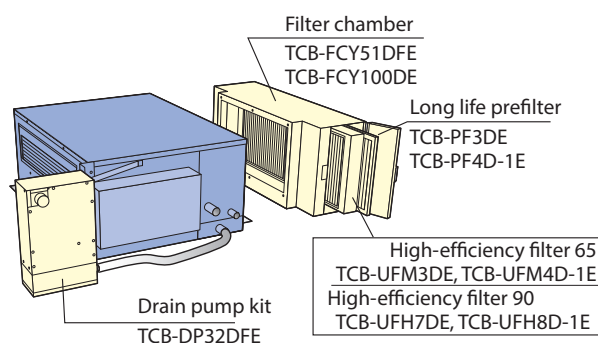

## Air-to-Air heat exchanger with DX-coil

**MMD-VN\*\*\*HEX1E**

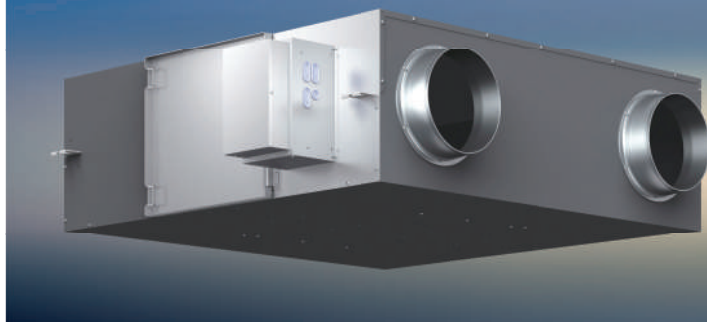

### Greater comfort and reduce load

Functionality built into the cooling system reduces load on cooling beyond that of the heat exchanger itself. This improves air quality and ensures maximum comfort throughout room being cooled.

### Flexible control

Supply and exhaust fan speed ratios can be changed for improved air volume control that best matches the needs of the environment and location.

### Free cooling at night

When the air outdoors is cooler at night, the system expels warm air from the room. This reduces the air conditioning load the next day for improved energy efficiency.



Remote controller  
NRC-01HE


### Technical specifications

Model name		MMD-	VN502HEX1E	VN802HEX1-E	VN1002HEX1-E	VN1002HEX1E2	
Fresh air conditioning load	Cooling (*1)	(kW)	4.10 (1.30)	6.56 (2.06)	8.25 (2.32)	8.25 (2.32)	
Power supply			1-phase 50Hz 230V (220~240V) / 1-phase 60Hz 220V (Separate power supply for indoor units required.)		1-phase 50Hz 230V (220V-240V) (Separate power supply for indoor units is required.)	1-phase 60Hz 220V (Separate power supply for indoor units is required.)	
Temperature exchange efficiency 50Hz / 60Hz	High	(%)	70.5/70.5	70.0/70.0	65.5		
	Mid	(%)	70.5/70.5	70.0/70.0	65.5		
	Low	(%)	71.5/72.0	72.5/73.0	67.5	68.0	
Enthalpy exchange efficiency 50Hz / 60Hz	Cooling	High	(%)	56.5/56.5	56.0/56.0	52.0	
		Mid	(%)	56.5/56.5	56.0/56.0	52.0	
		Low	(%)	57.5/58.0	59.0/59.	54.0	5.0
Fan unit 50Hz / 60Hz	Standard air flow	High	(m <sup>3</sup> /h)	500/500	800/800	950	
		Mid	(m <sup>3</sup> /h)	500/500	800/800	950	
		Low	(m <sup>3</sup> /h)	440/410	640/600	820	800
	External static pressure	High	(Pa)	120/200	120/190	135	195
		Mid	(Pa)	105/170	100/155	120	160
		Low	(Pa)	115/150	100/130	105	130
Sound pressure 50Hz / 60Hz	High	(dB)	37.5/40.0	41.0/43.0	43.0	43.5	
	Mid	(dB)	36.5/38.0	40.0/42.0	42.0		
	Low	(dB)	34.5/36.5	38.0/37.0	40.0		
External Dimensions	Height	(mm)	430				
	Width	(mm)	1140	1189			
	Depth	(mm)	1690	1739			
Total weight		(kg)	84	100	101	103	
Connecting piping	Gas side	(mm)	ø9.5		ø12.7		
	Liquid side	(mm)	ø6.4				
Drain port		(Nominal dia .mm)	25(Polyvinyl chloride tube)				


Note : (\*1) Cooling and heating capacities are based on the following conditions:  
 Cooling capacities are based on : indoor temperature :27 °CDB/19°CWB, Outdoor temperature : 35°CDB  
 Heating capacities are based on : indoor temperature :20 °CDB, Outdoor temperature : 7 °CDB/6°CWB  
 Fan is based on High and Middle  
 ( ) : The figures in ( ) indicate the heat reclaimed from the heat recovery ventilator.

\*If high humidity air (about 80% or more of relative humidity), such as fog, is inhaled by the Heat Exchanger, dew condensation water may trickle from a main body.


MMD-VN502HEX1E

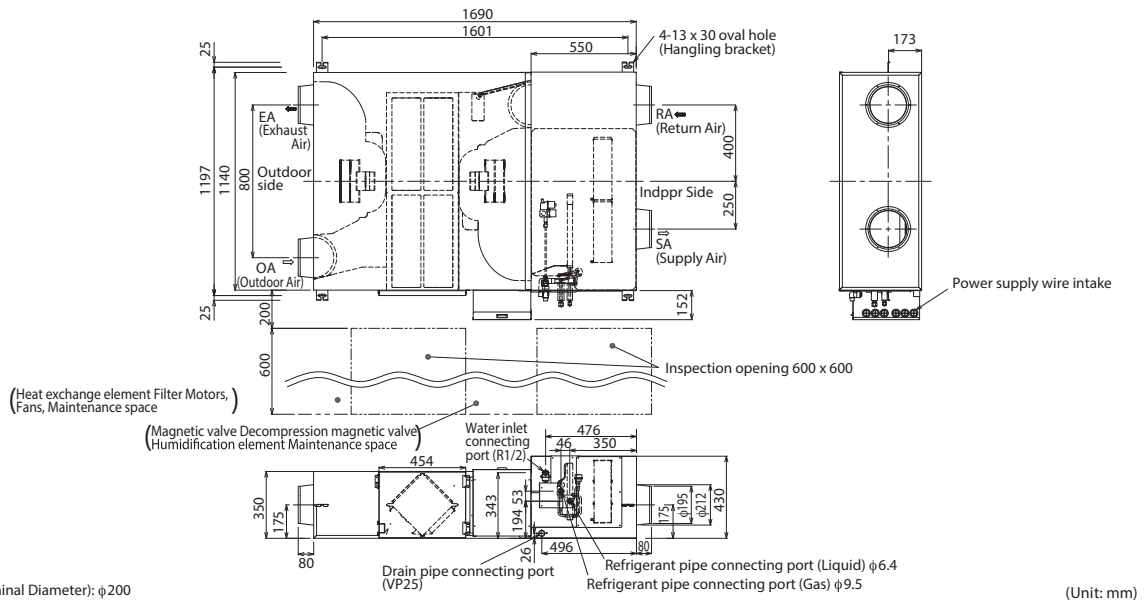

MMD VN802HEX1E to VN1002HEX1E/2

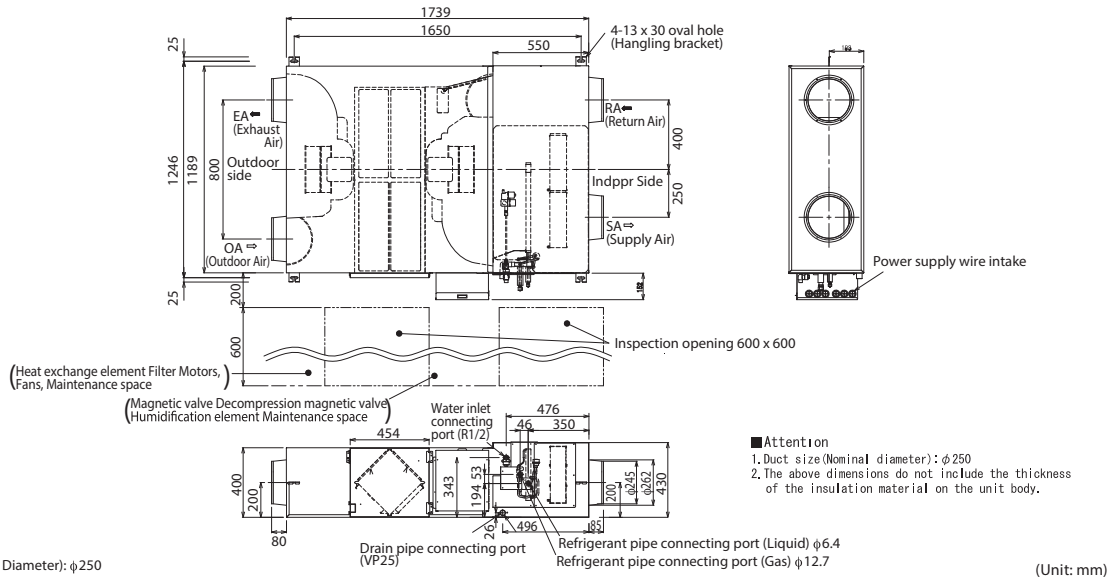

Options

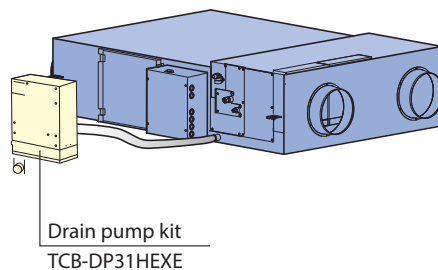

**Air-to-Air heat exchanger** (Stand alone unit)

VN-M\*\*\*HE



◀ **Greater comfort and reduced load**

Easily integrated into air conditioning systems of 150 m<sup>3</sup>/h to 2000 m<sup>3</sup>/h air volume, the air-to-air heat exchangers use exhaust air to pre-condition the incoming air, thus reducing the cooling or heating load and the overall size of the required system.

◀ **Free cooling at night**

When the air outdoor is cooler at night, the system expels warm air from the room. This reduces the air conditioning load the next day for improved energy efficiency.

◀ **Flexible control**

Supply and exhaust fan speed ratios can be changed for improved air volume control that best matches the needs of the environment and location.

◀ **Easy maintenance**

The heat exchange element can be washed in water.



Remote controller NRC-01HE

\* Do not connect to refrigerant piping from outdoor unit. Control wires can be connected.


**Technical specifications**

Model name	VN-	M150HE	M250HE	M350HE	M500HE	M650HE	M800HE	M1000HE	M1500HE	M2000HE
Power supply (V)	Fan speed	1-phase 50Hz 230V (220-240V) / 1-phase 60Hz 220V (Separate power supply for indoor units required.)								
Power consumption 50Hz/60Hz (W)	(Extra high)	68-78/76	123-138/131	165-182/209	214-238/260	262-290/307	360-383/446	532-569/622	751-786/928	1084-1154/1294
	High	59-67/65	99-111/105	135-145/162	176-192/206	240-258/283	339-353/408	494-538/589	708-784/830	1032-1080/1220
	Low	42-47/45	52-59/54	82-88/94	128-142/144	178-191/206	286-300/333	353-370/411	570-607/660	702-742/818
Air volume (m <sup>3</sup> /h)	(Extra high)	150/150	250/250	350/350	500/500	650/650	800/800	1000/1000	1500/1500	2000/2000
	High	150/150	250/250	350/350	500/500	650/650	800/800	1000/1000	1500/1500	2000/2000
	Low	110/110	155/155	210/210	390/390	520/520	700/700	755/755	1200/1200	1400/1400
External static pressure (Pa)	(Extra high)	82-102/99	80-98/97	114-125/167	134-150/181	91-107/134	142-158/171	130-150/185	135-156/165	124-143/165
	High	52-78/59	34-65/38	56-83/33	69-99/63	58-82/68	102-132/102	97-122/120	103-129/108	92-116/102
	Low	47-64/46	28-40/22	65-94/39	62-92/44	61-96/52	76-112/58	84-127/55	112-142/109	110-143/87
Sound pressure level (dB(A))	(Extra high)	26-28/27.5	29.5-30/31.5	34-35/35.5	32.5-34/33.5	34-36/35.5	37-38.5/38	39.5-40.5/41.5	38-39/39.5	41-42.5/42.5
	High	24-25.5/24.5	25-27/25	30-32/29.5	29.5-31/29	33-34/34	35.5-37/35	38.5-40/39	36.5-37.5/36.5	39.5-41/40
	Low	20-22/20	21-22/21	27-29/23.5	26-29/24.5	31-32.5/29.5	33.5-35/32.5	34-35.5/33.5	36-37.5/35.5	37-38/36.5
Temperature exchange efficiency (%)	(Extra high)	81.5/81.5	78/78	74.5/74.5	76.5/76.5	75/75	76.5/76.5	73.5/73.5	76.5/76.5	73.5/73.5
	High	81.5/81.5	78/78	74.5/74.5	76.5/76.5	75/75	76.5/76.5	73.5/73.5	76.5/76.5	73.5/73.5
	Low	83/83	81.5/81.5	79.5/79.5	78/78	76.5/76.5	77.5/77.5	77/77	79/79	77.5/77.5
Enthalpy exchange efficiency (%) for cooling	(Extra high)	69.5/69.5	65/65	60.5/60.5	64.5/64.5	61.5/61.5	64/64	60.5/60.5	64/64	60.5/60.5
	High	69.5/69.5	65/65	60.5/60.5	64.5/64.5	61.5/61.5	64/64	60.5/60.5	64/64	60.5/60.5
	Low	71/71	69/69	67/67	66.5/66.5	64/64	65.5/65.5	64.5/64.5	67/67	65.5/65.5
Dimensions (Length x Width x Height) (mm)		900 x 900 x 290			1140 x 1140 x 350		1189 x 1189 x 400		1189 x 1189 x 810	
Weight (kg)		36		38	53		70		143	
Duct diameter (mm)		100	150		200		250		inside: 250, outside: 283 x 730	
Operating range	Around unit	-10°C - 40°C 80% RH or less								
	Outdoor Air (OA)	-15°C (*1) - 43°C RH								
	Return Air (RA)	5°C - 40°C 0% RH or less								

\* Air volume can be changed over to high (extra high) mode or low mode.  
 \* Sound pressure level is measured 1.5m below the center of the unit.  
 \* Sound pressure level is the value which was measured at the acoustic room.  
 \* The actual values in an external operating environment are generally higher than the indicated values due to the contribution from ambient noise.  
 \* Sound pressure level is less than 70 dBA

\*If high humidity air (about 80% or more of relative humidity), such as fog, is inhaled by the Heat Exchanger, dew condensation water may trickle from a main body.


**VN-M150HE to VN-M350HE**

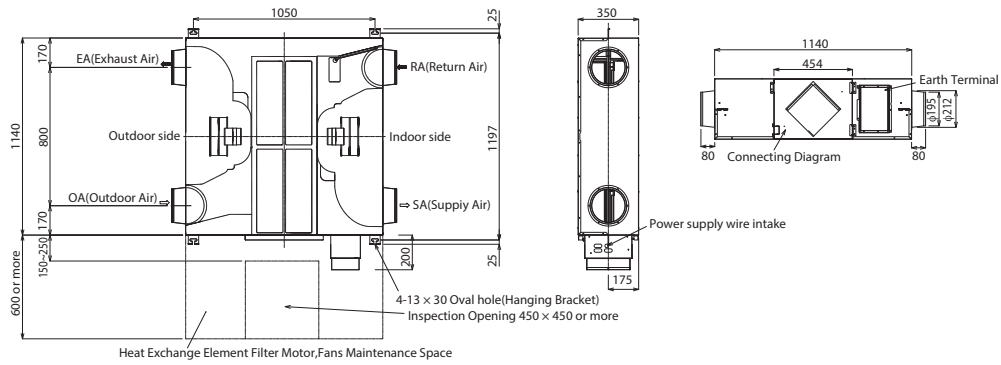

Duct size (Nominal Diameter):  $\phi 200$

(Unit: mm)


**VN-M500HE, VN-M650HE**

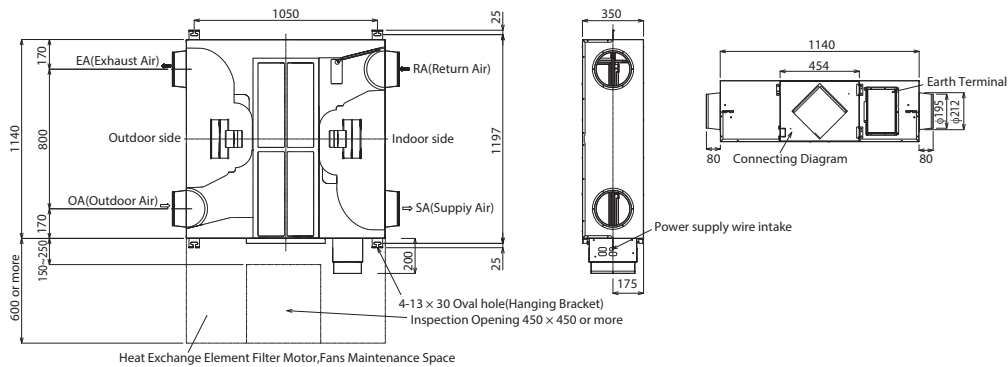

Duct size (Nominal Diameter):  $\phi 200$

(Unit: mm)


**VN-M800HE, VN-M1000HE**

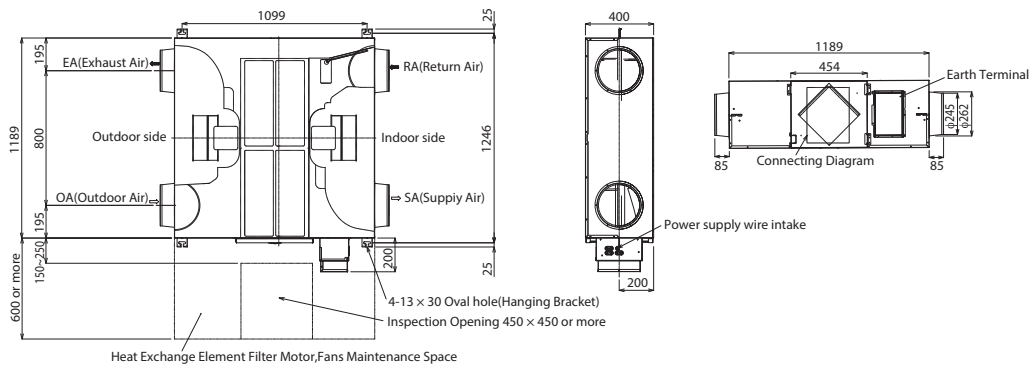

Duct size (Nominal Diameter):  $\phi 250$

(Unit: mm)

**VN-M1500HE, VN-M2000HE**

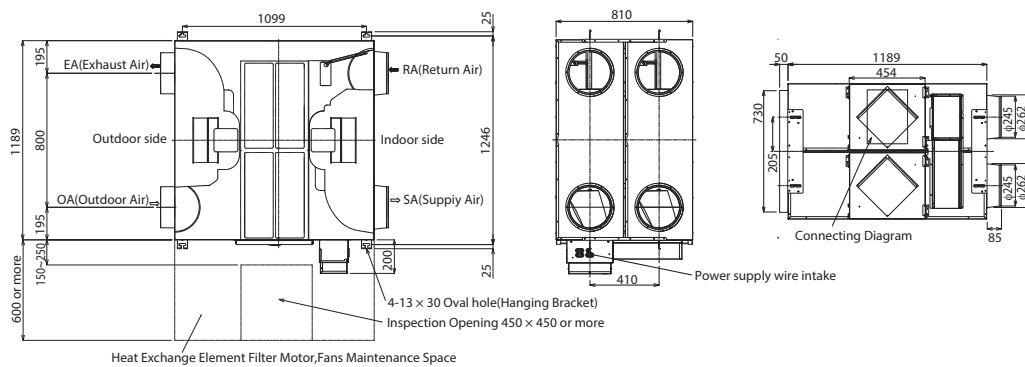

Duct size (Nominal Diameter):  $\phi 250$

(Unit: mm)

Indoor unit accessories


Indoor unit	Parts Name	Model Name	Applied Model	Notes	Remarks
4-way air discharge cassette type	Ceiling panel	RBC-U31PGP(W)-E	MMU-AP***4HP1-E	Required accessory	
	Fresh air inlet box	TCB-GB1602UE		For fresh air intake by using the knockout hole of fresh air filter chamber. (dia.=100 mm)	Use with TCB-GFC1602UE
	Fresh air filter chamber	TCB-GFC1602UE		For fresh air inlet box	
	Auxiliary fresh air flange	TCB-FF101URE2		For easy fresh air intake by using the knockout hole of indoor unit. (dia.=100 mm)	
	Spacer for height	TCB-SP1602UE		Height=50 mm	
	Air discharge direction kit	TCB-BC1602UE		Air direction charge by cutting off air discharge port (3 pcs.)	
Compact 4-way cassette type	Ceiling panel	RBC-UM21PG(W)-E	MMU-AP***7MH-E	Required accessory	
	Auxiliary fresh air flange	TCB-FF101URE2		For easy fresh air intake by using the knockout hole of indoor unit. (dia.=100 mm)	
	Occupancy sensor	TCB-SIR41UM-E			
2-way air discharge cassette type	Ceiling panel	RBC-UW283PG(W)-E	MMU-AP0072 to 0152WH1	Required accessory	
		RBC-UW803PG(W)-E	MMU-AP0182 to 0302WH1		
		RBC-UW1403PG(W)-E	MMU-AP0362/0482/0562WH1		
	Super long life filter	TCB-LF283UW-E	MMU-AP0072 to 0152WH1	Dust collecting effect: 50% (Weight method)	Use with TCB-FC283UW-E
		TCB-LF803UW-E	MMU-AP0182 to 0302WH1		Use with TCB-FC803UW-E
	Filter chamber	TCB-LF1403UW-E	MMU-AP0362/0482/0562WH1	For super long life filter	
		TCB-FC283UW-E	MMU-AP0072 to 0152WH1		
TCB-FC803UW-E		MMU-AP0182 to 0302WH1			
Auxiliary fresh air flange	TCB-FC1403UW-E	MMU-AP0362/0482/0562WH1			
1-way air discharge cassette type	Ceiling panel	RBC-UY136PG	MMU-AP***2WH1	For fresh air intake by using the knockout hole of indoor unit.	
	Front air discharge unit	RBC-US21PGE	MMU-AP***4YH1-E	Required accessory	
	Auxiliary fresh air flange	TCB-BUS21HWE		Required accessory	
Slim duct type	Auxiliary fresh air flange	TCB-FF101URE2	MMD-AP***4SPH1-E	For fresh air intake by using the knockout hole of indoor unit. (dia.=100	
		TCB-SF56C6BPE	MMD-AP0076 to 0186BHP1-E		
Concealed duct type	Spigot shaped flange	TCB-SF80C6BPE	MMD-AP0246/0276/0306BHP1-E		
		TCB-SF160C6BPE	MMD-AP0366/0486/0566BHP1-E		
		TCB-LK801D-E	MMD-AP0186/0246/0276HP1-E		
Concealed duct high static pressure type	Long Life Filter Kit	TCB-LK1401D-E	MMD-AP0366/0486/0586HP1-E		
	Auxiliary fresh air flange	TCB-FF151US-E	MMD-AP***6HP1-E		
	Long life filter kit	TCB-LK2801DP-E	MMD-AP0726/0966HP-E	Flange shaped, Mount chassis directly, Upside down mountable	
	Drain pump kit	TCB-DP40DPE	MMD-AP0726/0966HP-E	Lift up 500 mm	
Ceiling type	Drain pump kit	TCB-DP31CE	MMC-AP0158/0188HP-E	Stand-up 600 or less (from bottom face of ceiling)	Use with TCB-KP13CE
		TCB-KP13CE	MMC-AP0248 to 0568HP-E		Use with TCB-KP23CE
	Elbow piping kit	TCB-KP23CE	MMC-AP0158/0188HP-E	Needed when drain pump kit is used	
Air to Air Heat Exchanger with DX-coil	Drain pump kit	TCB-DP31HEXE	MMD-VN502 to 1002HEX1E	Stand-up 330 mm or less (from bottom face of ceiling)	
Fresh air intake indoor unit type	High-efficiency filter 65	TCB-UFM3DE	MMD-AP0721/0961HFE	Dust collecting effect: 65% (NBS Colorimetric method)	Use with TCB-PF3DE
		TCB-UFM4D-1E	MMD-AP0481HFE		Use with TCB-PF4D-1E
	High-efficiency filter 90	TCB-UFH7DE	MMD-AP0721/0961HFE	Dust collecting effect: 90% (NBS Colorimetric method)	Use with TCB-PF3DE
		TCB-UFH8D-1E	MMD-AP0481HFE		Use with TCB-PF4D-1E
	Long life prefilter	TCB-PF3DE	MMD-AP0721/0961HFE	Dust collecting effect: 50% (Weight method)	
		TCB-PF4D-1E	MMD-AP0481HFE		
	Filter chamber	TCB-FCY51DFE	MMD-AP0481HFE	For high-efficiency filter or long life prefilter	
TCB-FCY100DE		MMD-AP0721/0961HFE			
Drain pump kit	Drain pump kit	MMD-AP0481HFE/0721/0961HFE	Stand-up 330 or less (from bottom face of ceiling)		

		Combination Pattern					
1) Accessory for 4-way air discharge cassette type: combination pattern		1	2	3	4	5	6
		Ceiling panel	Fresh air inlet box + Fresh air filter chamber	Fresh air filter chamber	Auxiliary fresh air flange	Space for height adjustment	Air discharge direction kit
1	Ceiling panel		OK	OK	OK	OK	OK
2	Fresh air inlet box + Fresh air filter chamber	OK			OK	—	OK
3	Fresh air filter chamber	OK			OK	OK	OK
4	Auxiliary fresh air flange	OK	OK	OK		OK	OK
5	Spacer for height adjustment	OK	—	OK	OK		OK
6	Air discharge direction kit	OK	OK	OK	OK	OK	




# Remote controllers

## Air-conditioning Management System on site

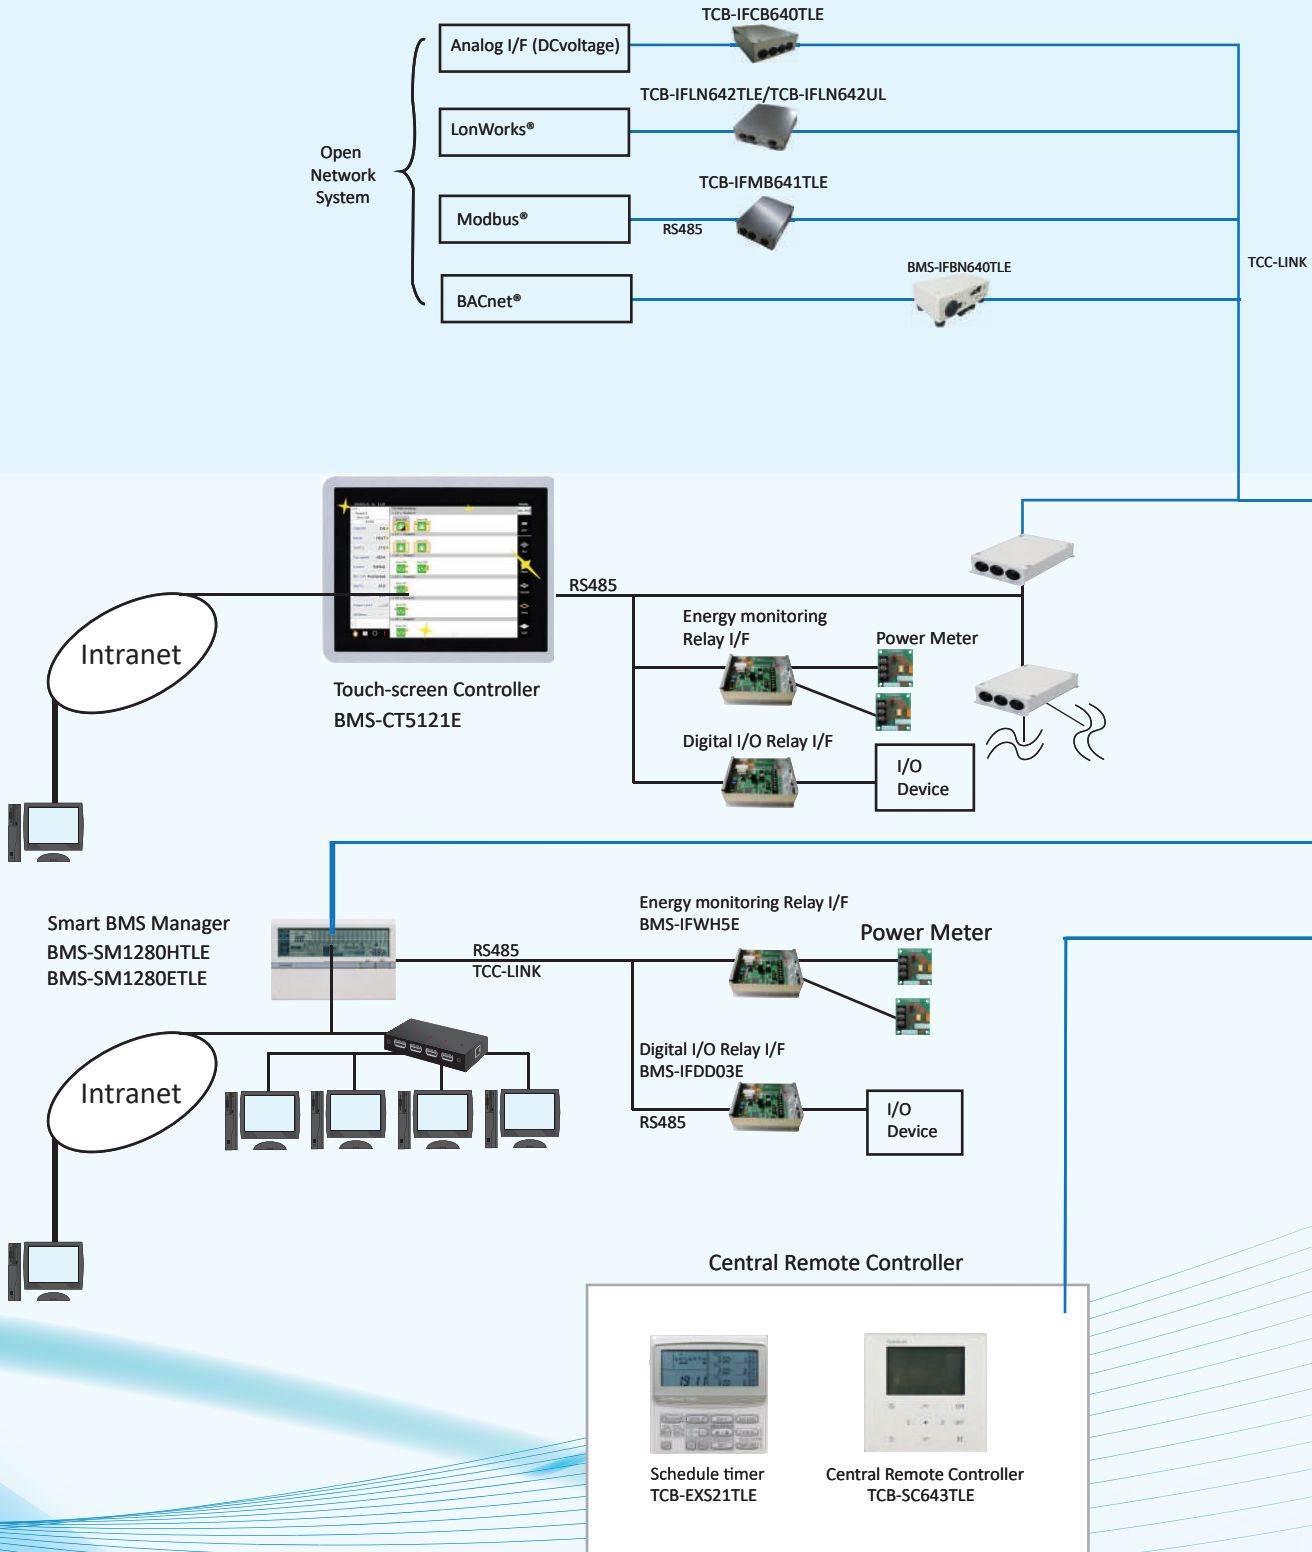





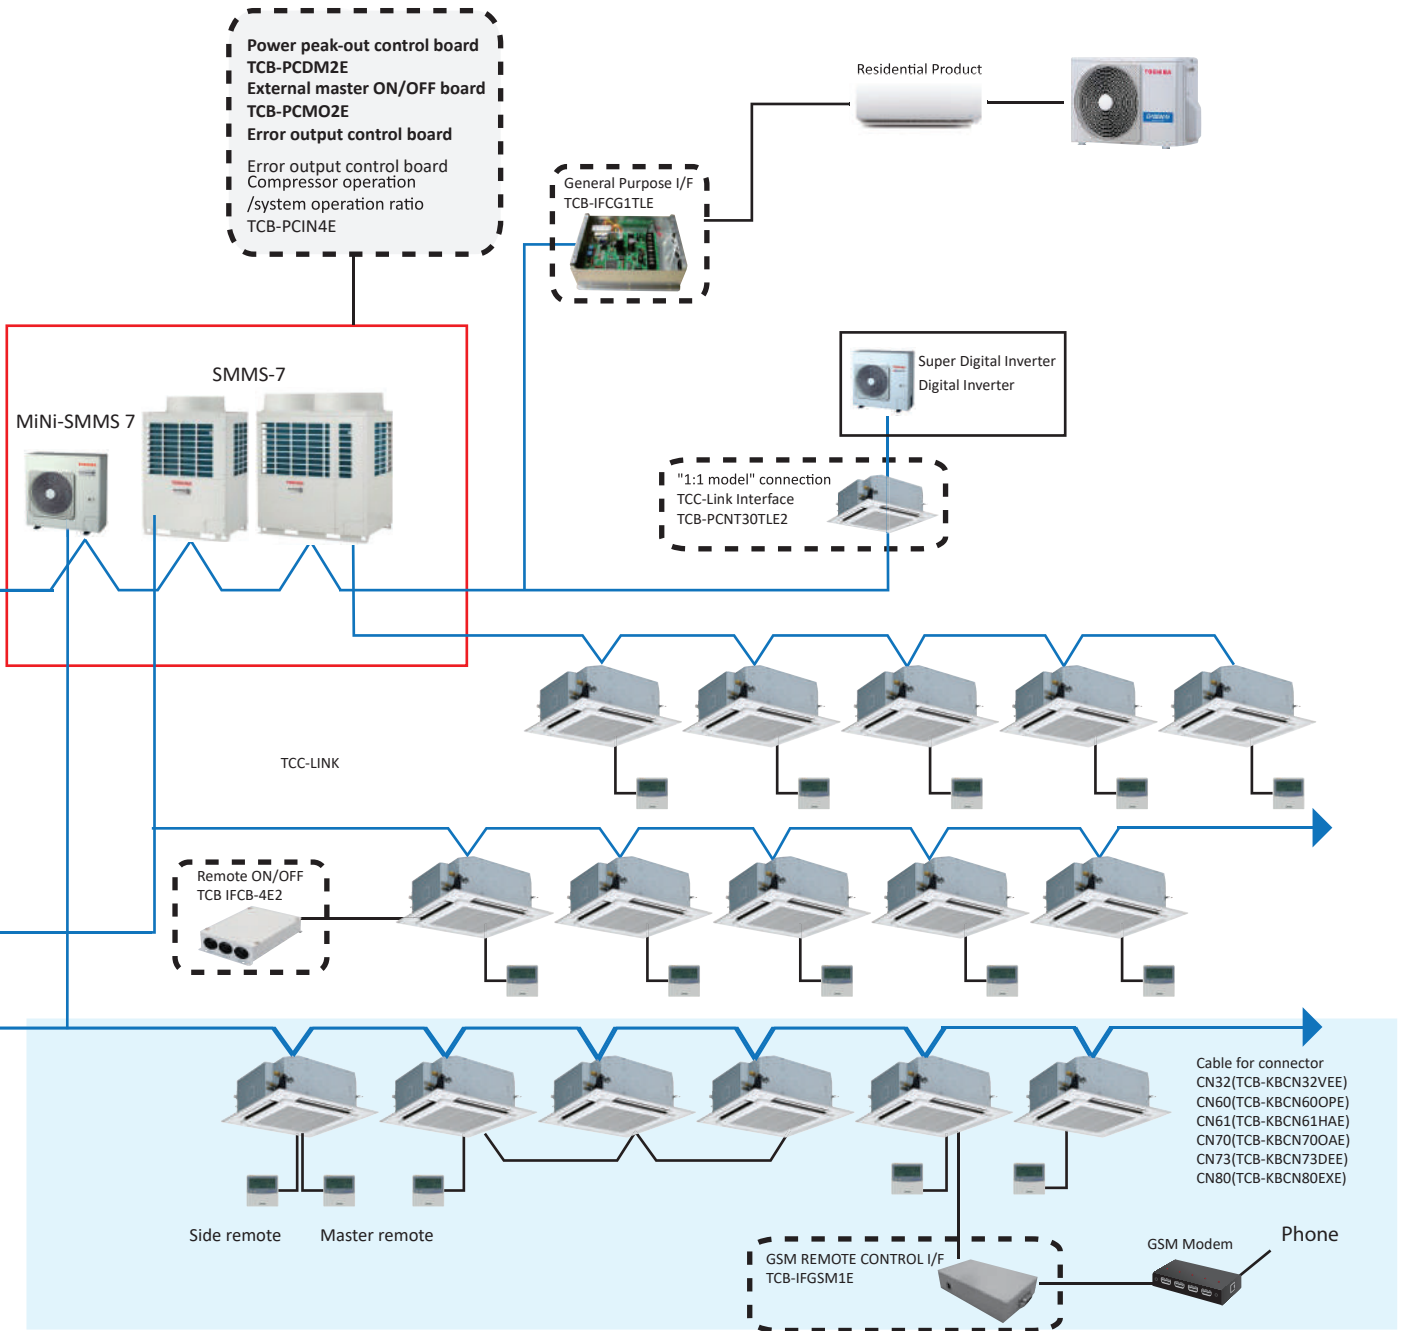


1.LonWorks® : Registered trademark by Echelon corporation.  
 2.BACnet® : ANSI/ASHRAE 135-1995, A data Communication Protocol for Building Automation and Control Network.  
 3.Modbus® : Registered trademark by Schneider E.





Wire remote controller/Wireless remote controller

 <p>Compact wired remote controller RBC-ASC11E</p>	 <p>Wired remote Controller RBC-AMS55E-ES RBC-AMS55E-EN</p>	 <p>Wired remote controller with Weekly timer RBC-AMS41E</p>	 <p>Wired remote controller RBC-AMT32E</p>	 <p>Simple remote controller RBC-AS41E</p>	 <p>Wireless remote controller</p>	 <p>Remote Sensor TCB-TC411E</p>
---	--	---	---	--	---	---

**Wired remote controller**



**NEW**  
features

**Wired remote controller**  
**RBC-AMS55E-EN**  
**RBC-AMS55E-ES**

Wired remote controller with a **summer time shift**-featuring LCD with **AM/PM display**.

- 7-day timer function.
- Multi-language available.
- Possibility to set and display the room name to easily set-up and monitor the working parameter.
- Save mode by schedule timer to optimise energy consumption.
- Two "Hot Keys" (F1, F2) for easy operation of air conditioner functions.
- Easy to read layout including display of indoor unit model name and serial number.
- Built-in backup power. Settings are kept in memory up to 72 hours in case of power failure.
- Remote TA sensor available in controller.
- Can be connected to a single indoor unit or a group of up to 8 indoor units.



**Standard Remote controller**  
**RBC-AMT32E**

Standard wired remote controller can be connected to a single indoor unit or a group of up to 8 indoor units.


Power save operation limits the greatest current value. The remote controller allows error to be displayed while the protective device works or a error occurs.



**Remote controller with weekly timer (7-day timer function)**  
**RBC-AMS41E**

- **Clock display**
- **Schedule timer:**  
Possible to program schedule timer (7-day timer) function  
Possible to program 8 functions for each day of the week

\*The following items can be set in program: operation time, operation start/stop, operation mode, temperature setting, restriction on button operation



**NEW**

**Wired remote controller**  
**RBC-ASC11E**

- Compact size H86mm x W86mm(x16mm)
- Stylish design with big screen and backlight
- Time off
- Available by 0.5 C



**Simple wired remote controller**  
**RBC-AS41E**

- Start/Stop
- Temperature setting
- Air flow changing
- Check code display

**Wireless remote controller**



**Wireless remote controller kit & sensor unit (receiver unit)**

- Start/Stop •Changing mode •Temperature setting
- Air flow changing
- Timer function  
Either "ON" time or "OFF" time or "CYCLIC" can be set how many 30 min. later ON or OFF is operated.
- Control by 2 remote controllers is available. Two wireless remote controllers can operate one indoor unit. The indoor unit can then be operated separately from the two different locations.
- Check code display

\*The wireless remote control cannot be connected to concealed duct high static pressure type.



**RBC-AX33CE**  
Integral receiver  
(For ceiling) (MMC-AP\*\*\*HP-E)  
(MMU-AP\*\*\*4SH1-E)



**TCB-AX32E**  
Stand alone receiver  
(For 4-way air discharge cassette, compact 4-way cassette  
2-way air discharge cassette, ceiling, concealed duct standard, slim duct, floor standing cabinet, floor standing, 1-way discharge cassette (MMU-AP \*\*\*4YH1/SH1-E)



**RBC-AX32U(W)-E**  
Integral receiver (For 4-way air discharge cassette) (MMU-AP\*\*\*4HP1-E)



**RBC-AX23UW(W)-E**  
Integral receiver (For 2-way air discharge cassette) (MMU-AP\*\*\*2WH1)



**RBC-AX32UM(W)-E**  
Integral receiver (MMU-AP\*\*\*7MH-E) (For compact 4-way discharge cassette)

## Central remote controller



**Central remote controller**  
TCB-SC643TLE

- **Operation panel part**  
The new central remote controller has a simple touch operation to use
- **Features**
  - Easy control and simple monitoring for multi IDU's up to 64 air-conditioner and those can divide into 1 to 10 zones.
  - Multiple display mode (All,Zone,Unit) to control and monitor.
  - Easy operation to touch the mark part.



**Schedule timer**  
TCB-EXS21TLE

- **Schedule timer mode**
  - 6 programmings per day
  - Enabling 8 groups to be programmed
  - A maximum of 64 indoor units can be controlled
  - A maximum of 100 hours back-up power supply
- **Weekly timer mode**
  - 7 types of weekly schedule and 3 programmings per day

## Other



**Remote sensor**  
TCB-TC41LE

Install this sensor when outside air has been introduced or when overcooling are being minimised.




**Wired remote controller for air to air heat exchanger**  
NRC-01HE

- Up to 8 units of the Air to Air Heat Exchanger can be operated using this remote controller.
- Control by 2 remote controllers is available.  
Two remote controllers can operate a single Air to Air Heat Exchanger.
- Air conditioning units may be controlled in addition to controlling the Air to Air Heat Exchanger.
- Central control allows linked ON/OFF operation of air conditioner and Air to Air Heat Exchanger.
- Central control can be set to allow standalone operation of the Air to Air Heat Exchanger.
- Switchable ventilation modes (Automatic/Air to Air/Normal)
- Switchable ventilation air volume (Extra-high/High-Low)

# Building management systems


## SMART BMS MANAGER / SMART BMS MANAGER WITH DATA ANALYSER

**BMS-SM1280HTLE**

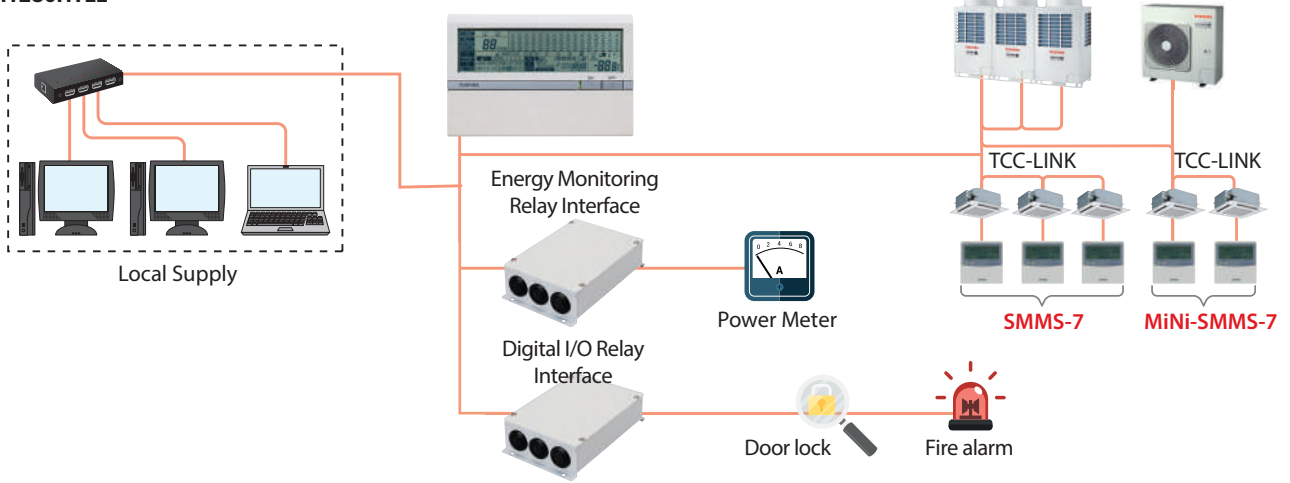


## Touch screen controller


**BMS-CT1280E**

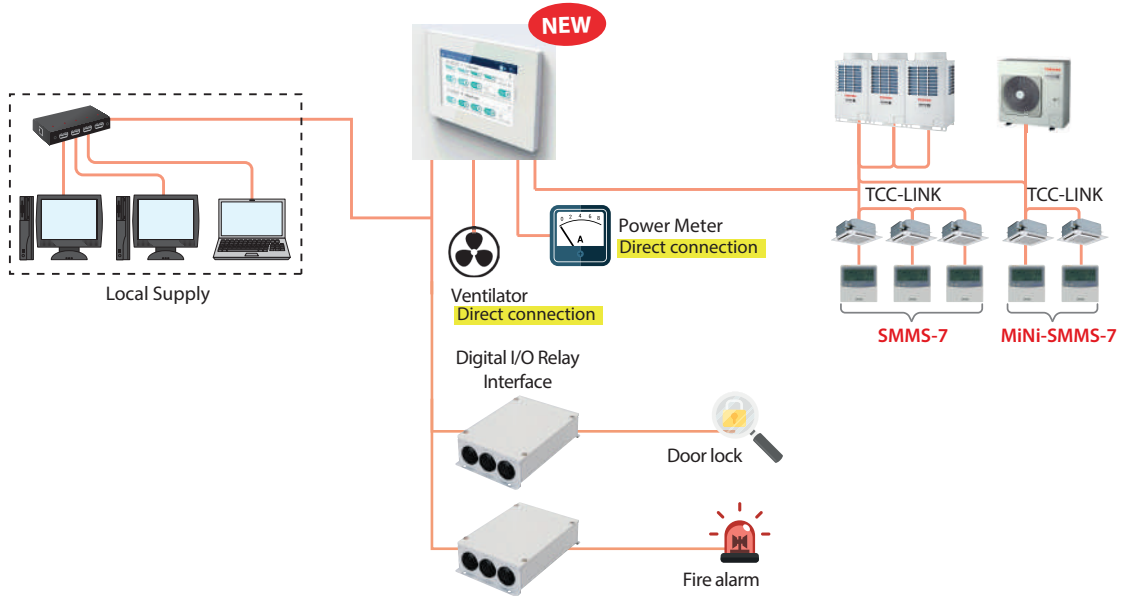

**BMS-CT5121E**

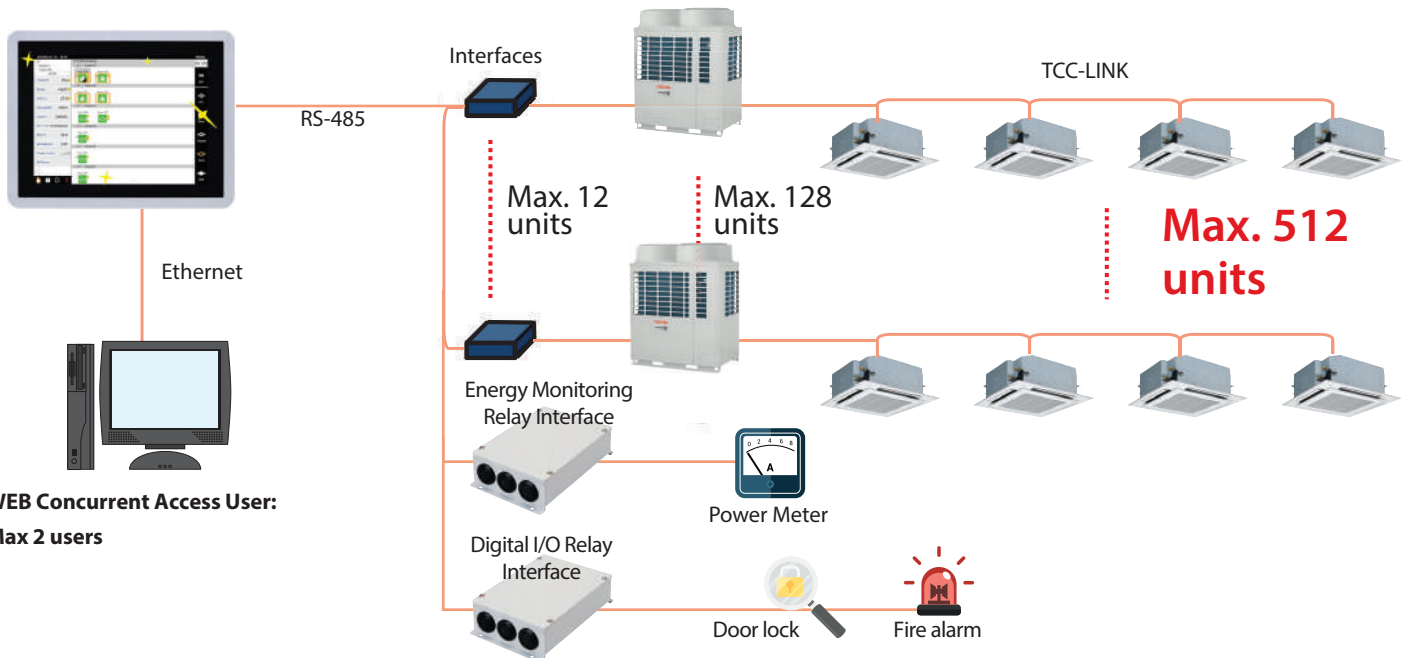

**SMART BMS MANAGER**  
BMS-SM1280HTLE



**Web browser control software**

- List View available - Displays all indoor units in one screen
- Set View available - Shows basic indoor unit settings on main screen
- Advanced operation and master schedule functions available
- Advanced operation & master schedules can be set on a calendar
- Up to 4 concurrent users can be connected
- Up to 32 user accounts can be programmed with different levels of access (at least 1 must be administrator level)
- Energy monitoring and billing functions are available. Power meter locally supplied energy.
- Additional digital I/O device is available
- Thin profile controller and separate power supply unit enables easy installation
- Maximum 128 FCU

**Touch screen controller**  
BMS-CT1280E

NEW



**Smart slide switch**



**Individual**



Toshiba touch screen controller **BMS-CT1280E** won iF DESIGN AWARD 2019, with an excellence UI and display design.


**Features**

- Easy control and user friendly design on the touch screen controller.
- Attractive UI and multiple display design for Business (Office/shop) use.
- Simple monitoring for multi IDU monitoring and control without PC, connecting up to 128 IDUs.  
Direct DI/DO or Power meter I/P W/O relay interface.  
Available to connect hot water module\* for VRF


**SMART MANAGER WITH DATA ANALYSER**  
BMS-SM1281ETLE



**Energy monitoring display**



3D energy view



Daily energy view



**TOUCH SCREEN CONTROLLER**  
BMS-CT5121E

**• Touch screen controller**


Using the touch screen controller provides a clear display and enables easy operation. A maximum of 512 units / groups are controllable.

**• Energy monitoring and billing application**

Power meter locally supplied Energy

**• Web connection**

**• Layout diagram function (Option)**



**LAYOUT DIAGRAM FUNCTION (OPTION)**

**FEATURES**

- Icon display
- Return back function
- Save & demand control for outdoor unit
- Ventilation unit control & monitoring
- Setting temp. range control
- Setting temp. shift
- Layout diagram function (Option)



**Relay Interface BMS-IFWH5E**  
For Energy Monitoring to connect power meter


**Relay Interface BMS-IFDD03E**  
to connect external digital input/output




**Relay Interface BMS-IFLSV4E**  
For TCS-NET (Max. 64 FCU/Unit)

# Open network systems


## BACnet® system

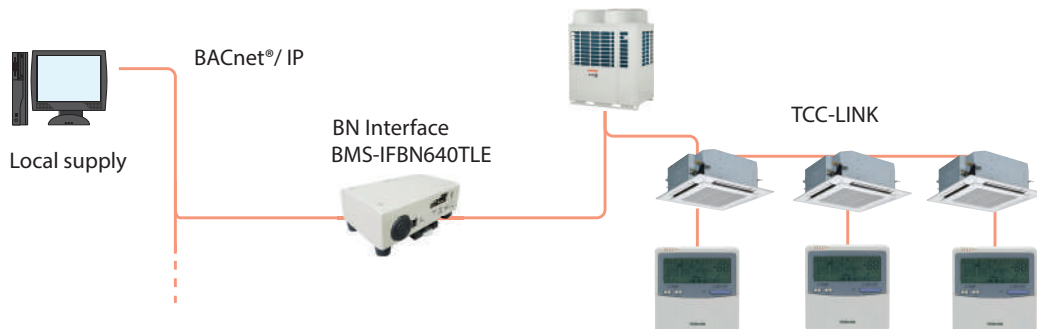

## LonWorks®

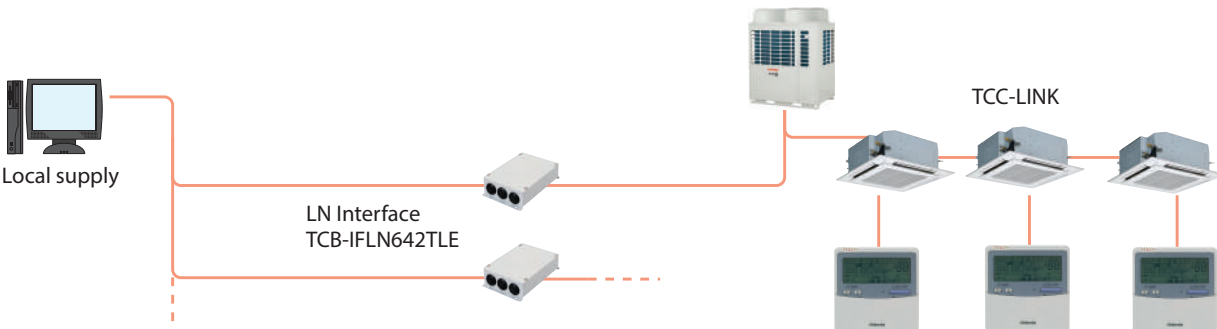

## Modbus®

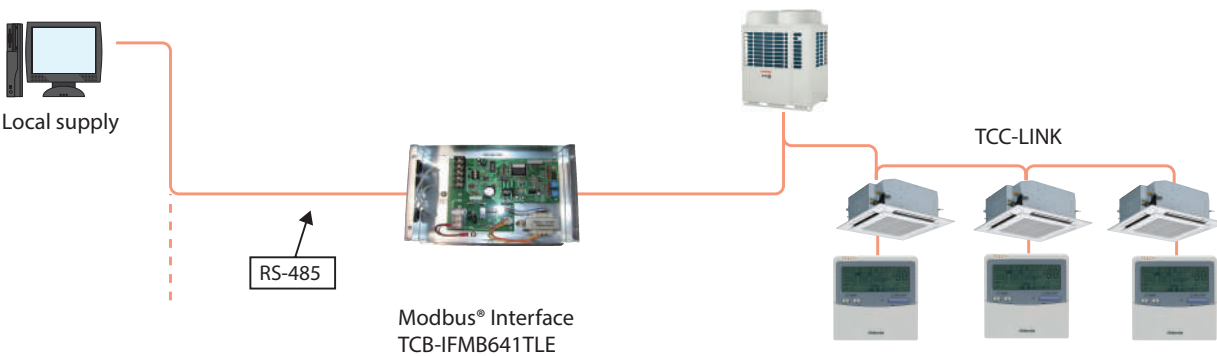



**BN Interface**  
BMS-IFBN640TLE

• **BACnet®**

The BACnet® system operates in conjunction with the BACnet®. Server uses object signals to provide the following functions:

• **Control**

- ON/OFF
- Temperature setting
- Fan speed
- Max 64 FCU

• **Monitoring**

- ON/OFF
- Operation mode
- Temperature setting
- Room temperature
- Local remote controller : permit / prohibit



**LN Interface**  
TCB-IFLN642TLE

• **LonWorks® LN Interface**

The LonWorks® interface manages the SMMS-e air conditioning system as a Lon device to communicate with the customer's Building Management System and to monitor operational status.

A maximum of 64 units / groups are controllable per interface.

• **SNVT signal**

Signals and provides the following functions:

• **Control**

- ON/OFF
- Temperature setting
- Fan speed
- Max 64 FCU

• **Monitoring**

- ON/OFF
- Operation mode
- Temperature setting
- Room temperature
- Local remote controller : permit / prohibit



**Modbus® Interface**  
TCB-IFMB641TLE

• **Modbus®**

The Modbus® interface manages the SMMS-e air conditioning system as a Modbus® device to communicate with the customer's Building Management System.

Accessible to 64 units / groups per one TCB-IFMB641TLE, 15 TCB-IFMB641TLEs on one Modbus® Master (prepared by user).

Signals and provides the following functions:

• **Control**

- ON/OFF
- Temperature setting
- Fan speed
- Max 64 FCU

• **Monitoring**

- ON/OFF
- Operation mode
- Temperature setting
- Room temperature
- Local remote controller : permit / prohibit

1. LonWorks®: Registered trademark Echelon corporation.

2. BACnet®: ANSI/ASHRAE 135-2008, A data Communication Protocol for Building Automation and Control Networks.

3. Modbus® is a registered trademark of Schneider E.

## Application controls

### TCB-PCDM4E



Size: 71 × 85 (mm)

#### Power peak-cut control

- Feature

The upper limit capacity of the outdoor unit is restricted based on the outdoor power peak selected setting.

- Function

Two control settings are selectable by setting SW07 on the interface P.C. board on the outdoor unit.

### TCB-PCMO4E



Size: 55.5 × 60 (mm)

#### Snowfall fan control

- Feature

The upper limit capacity of the outdoor unit is restricted based on the outdoor power peak selected setting.

#### External master ON/OFF control

- Feature

The outdoor unit starts or stops the system.

#### Night operation (Sound reduction) control

- Feature

Sound level can be reduced by restricting the compressor and fan speeds.

#### Operation mode selection control

- Feature

This control can restrict the selectable operation modes.



**TCB-PCIN4E**

Size: 73 × 79 (mm)

**Error/Operation output control****• Feature**


Enables external output of error and operation signals.

**Compressor operation output****• Feature**

Enables external signal output for each compressor that is in operation within any given outdoor unit. This feature provides a practical method for calculating total operating times for each compressor.

**Operating rate output****• Feature**


External output of system operating rates enables remote monitoring of operating conditions.

**TCB-IFCB-4E2**

Size: 200 × 170 × 66 (mm)

**Remote location ON/OFF control box****• Feature**

Start and stop of the air conditioner is possible by an external signal and indication of operation/ alarm externally.

**Monitoring**

ON/OFF status (for indoor unit)


Alarm status (system & indoor unit stop)

ON/OFF command

Air conditioner can be turned ON/OFF by the external signals.

The external ON/OFF signals will initiate the signals shown below.

**General Purpose Interface**

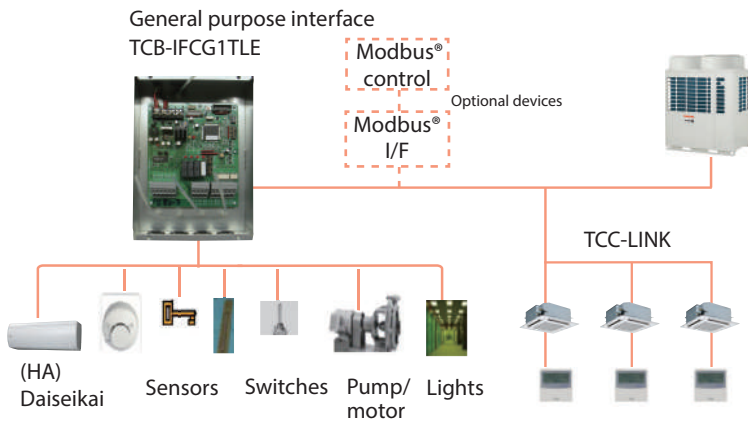

**Concept**

- Controls the operation status of each indoor unit.
- ON/OFF control of peripheral equipment via the relay point of Toshiba's BMS. (1pt only)


**Standard function**

Central remote controller and Building Management System devices can control ON/OFF function via digital I/O ports.

**Optional function**

Control using the following channels: 4-channel relay control, 6-channel digital input, 2-channel analog voltage input and output, and 2-channel temperature measurement functions via Modbus® I/F.

**Analog Interface**

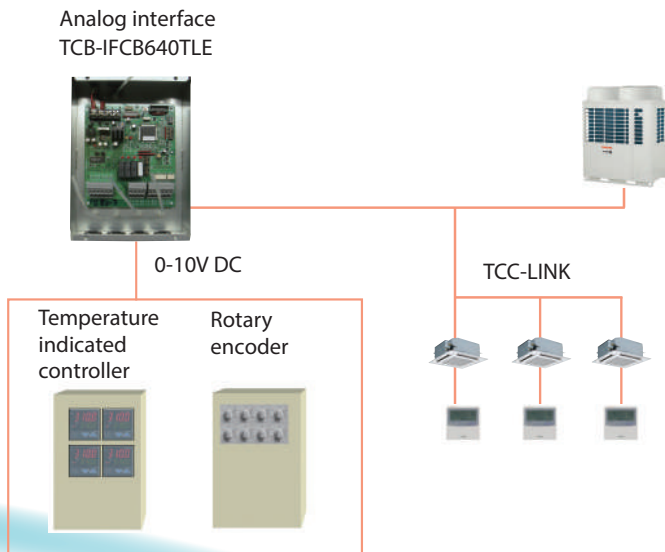

**Concept**

- Provides access to 64 indoor units.
- Does not require special network knowledge.
- Can control each indoor unit on TCC-LINK, (on/off, temperature setting, airflow volume, louver position), and monitor status based on 0-10V DC voltage input.
- Enables relay control and status monitoring of general-purpose I/F TCB-IFCG1TLE.

## Installation and the use of refrigerants not specified by Toshiba Carrier Corporation

Toshiba refrigeration and air-conditioning units are designed and manufactured on the assumption that the product is used with a specific refrigerant suitable for each unit.

We have recently seen some cases where the type of refrigerant used is different from the one originally installed in the product. Such actions may cause mechanical defects, malfunctions, failures and in some cases result in a serious safety issue. Therefore do not install any refrigerant other than the one specified by Toshiba Carrier Corporation for its respective products.

The type of the refrigerant used for each of our products is shown in the accompanying owners manual, or on the product label attached on the product itself.

Toshiba Carrier Corporation shall not assume any liability for failures, malfunctions or safety in its products if the refrigerant used is different from the one specified.

## SAFETY PRECAUTIONS

### For operation:

- Before use, read through the operating instructions to ensure proper use.

### Concerning the purpose for which the air conditioners are to be used

- The air conditioners presented in this catalogue are air conditioning/heating units to be used solely by general consumers.
  - Do not use these air conditioners for special applications such as for the storage of food items, animals, plants, precision machines or works of art. Doing so may degrade the quality of the items.
  - Do not use these air conditioners for air-conditioning applications in vehicles or ships. Doing so may cause water and/or power leakages.

## Precautions for using air conditioners

### Concerning the automatic defrosting unit

When the outdoor air temperature drops, frost may form on the heat exchanger of the outdoor unit. In such cases, the automatic defrosting unit will be activated, and it will take 5 to 8 minutes for the heating operation to be restored.

### Concerning the air conditioner's operating conditions and their selection

(1) Avoid using the air conditioner in the following locations.

- Locations with acidic or alkaline atmospheres (locations at which highly acidic or alkaline air is directly drawn in, such as in hot springs areas from which sulfur gases are given off, or where chemicals, vinegar, exhaust air from burners, etc., are given off) The heat exchangers and other parts may become corroded.
- Locations with atmospheres filled with coolant or other machine oil or steam exhaust (such as at food preparation factories or machine plants). The heat exchangers may corrode; frost may form as a result of heat exchanger malfunction; air conditioner operating performance may be compromised or condensation may form as a result of clogged filters; plastic parts may incur damage; heat-insulation materials may become separated, etc.

(2) Before using an air conditioner in any of the following locations, consult with your dealer or a qualified contractor.

- Locations where vapors from edible oils are given off (such as in bakeries or kitchens and restaurants that use edible oils) ...The air conditioner's operating performance may be compromised or condensation may form as a result of clogged filters, and the plastic parts may incur damage. In line with the prevailing conditions, take countermeasures such as tailoring the installation conditions in accordance with the conditions, using air conditioners designed for kitchens or oil guard filters, etc.
- Locations with disinfectant-induced chlorine atmospheres (water tanks, etc.) The metal parts in the heat exchangers, motors, etc., may become corroded.
- Locations with high salinity (coastal areas, etc.) Corrosion may occur so use outdoor units specifically designed to withstand exposure to salt.

- Locations where power is supplied from independent power generators. The power line frequency and/or voltage may fluctuate, possibly causing the air conditioner to malfunction.
- Locations where high frequencies or electrical noise is generated (from high-frequency welders used for vinyl welding and processing, high-frequency therapeutic devices used for thermotherapy, etc.) The electronic components may be adversely affected, possibly causing the air conditioner to malfunction.
- Locations where electronic equipment is installed. Electrical noise may adversely affect the operation of the electronic equipment.

(3) Concerning use in locations with high ceilings

- In locations with high ceilings, use of circulators for improving the temperature distribution during heating is recommended.

(4) Concerning use in high-humidity environments

- When the ceiling-recessed type of indoor unit is installed in a location, such as those described below, and it is very hot and humid inside the ceiling, condensation may form on the external surfaces of the indoor unit and drip down. In such cases, add external heat-insulating materials.
  - Locations such as food preparation sites in which the areas above the ceilings are hot and humid
  - Locations in which outside air is drawn in and routed above the ceiling
  - Above ceilings with a slate roof or tiled roof overhead

(5) Even when an air conditioner is shut down, it will still consume a small amount of power to protect the unit. If the air conditioner will not be used for a prolonged period, turn OFF the main switch (ground fault circuit breaker). However, before the unit is to be used again, turn ON the main switch (ground fault circuit breaker) for at least 12 hours in order to prevent trouble.



# ง่ายๆ

ลงทะเบียน • แจ้งซ่อม • ตรวจสอบสถานะ  
เพียง 3 ขั้นตอน ที่

## www.carrier.co.th



CUSTOMERS INSTALLERS  
CALL CENTER DEALERS  
SUB CONTRACTORS SALESMANFACTORY



Notice : Toshiba is committed to continuously improving its products to ensure the highest quality and reliability standards, and to meet local regulations and market requirements All features and specifications are subject to change without prior notice

**CARRIER (THAILAND) CO.,LTD.**  
1858/63-74 14<sup>th</sup>, 15<sup>th</sup> Floor, Debaratna Road,  
Km.4.5, Bangna Tai, Bangna, Bangkok 10260  
Tel : 02-090-9999 Fax : 02-751-4778

บริษัทฯ ขอสงวนสิทธิ์ที่จะเปลี่ยนแปลงรายละเอียดข้างต้น โดยไม่ต้องแจ้งให้ทราบล่วงหน้า  
Carrier reserves the right to make changes in specifications without prior notice.

MINI\_SMMS-12/07/2019