

TOSHIBA

SMMS ∞
SUPER MODULAR MULTI SYSTEM

Customized for efficiency.
Customized to help you ace.



TOSHIBA AIR CONDITIONING



Better Air Solutions


TOSHIBA EXPERIENCE THE FUTURE **SMMS ∞**

› CUSTOMIZED FOR EFFICIENCY CUSTOMIZED TO HELP YOU ACE

Discover the next generation of efficient and flexible VRF system for sustainable cooling. Engineered in Japan, the SMMS ∞ integrates latest technological innovations and provides multiple customization options to achieve top-class efficiency and ensure unrivalled comfort.

SMMS ∞
SUPER MODULAR MULTI SYSTEM

Enhanced Efficiency
Improved Flexibility
Superior Serviceability

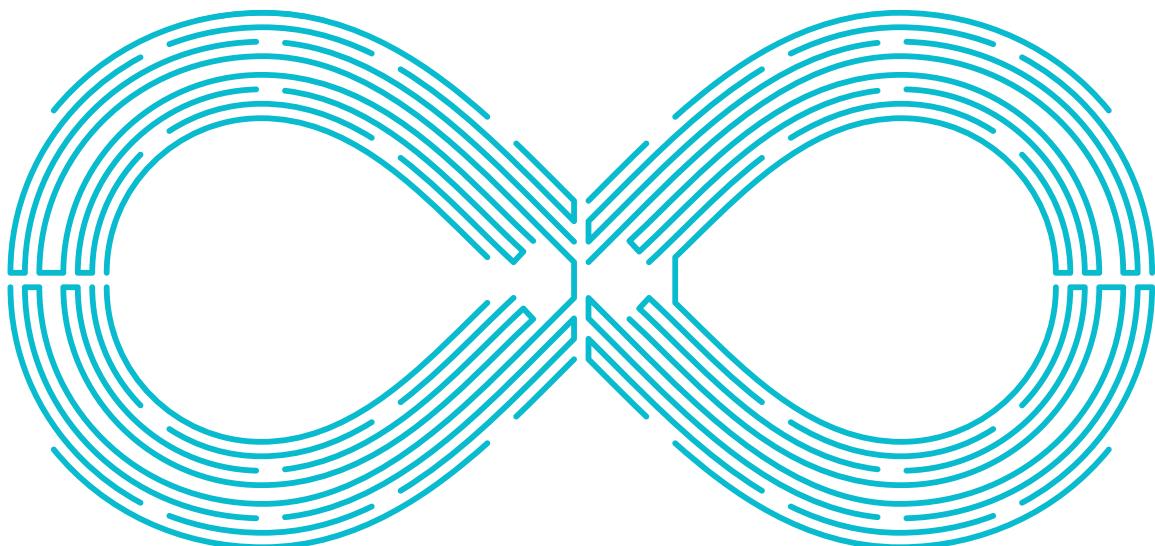

Benefits for the consultants



SMMS ∞ offers unlimited possibilities in terms of capacity, connectivity, indoor unit lineup and control solutions, providing the correct solution for your customers needs. Toshiba's intuitive selection tool will guide you through the selection process with minimal input from your side, ensuring trouble-free installation and operation.

Benefits for the users



There is nothing like a comfortable place to enjoy the present moment. Full of Toshiba innovations, the new SMMS ∞ guarantees all year round comfort combined with superior energy management, advanced air filtration and full control solutions for maximized product usability.

Benefits for the installers



The brand new chassis of SMMS ∞ is both compact and lightweight. This brand new design and technology make it easier for an installer to install SMMS ∞ . It needs simplified piping work, reduced additional refrigerant recharge, and simplified test runs. Therefore, the Installer is able to get installer ace with this.

A BRAND NEW CHASSIS

Engineered in Japan, SMMS ∞ integrates all the latest technological innovations from Toshiba to achieve top class efficiency and ensure unrivalled comfort.

Up to 26HP single module / 120HP combination

Simplified maintenance:
Easy access to main internal components

Earthquake and typhoon Durability chassis



> UNIQUE ON THE MARKET: TWIN ROTARY COMPRESSOR

The exclusive Toshiba twin rotary compressor brings outstanding performance to SMMS ∞ for enhanced system reliability.



Large capacity

Wide operating range

Low required refrigerant

Low vibration

DLC treatment

> TOP CLASS EFFICIENCY



The SMMS ∞ utilises new and improved highly efficient core technologies, resulting in greater energy efficiency and performance.

50% part load

COP up to 8.6



100% load

COP up to 5.2




INFINITE FLEXIBILITY

The SMMS ∞ exceeds the limits of VRF for maximised project coverage, resulting in a combination that offers options on efficiency, space, and cost. Whatever your requirement, SMMS ∞ can be customized to deliver the best result for your project.

4,000 combinations patterns
Free combination

1,200m max
Long piping length

110m max
High piping lift

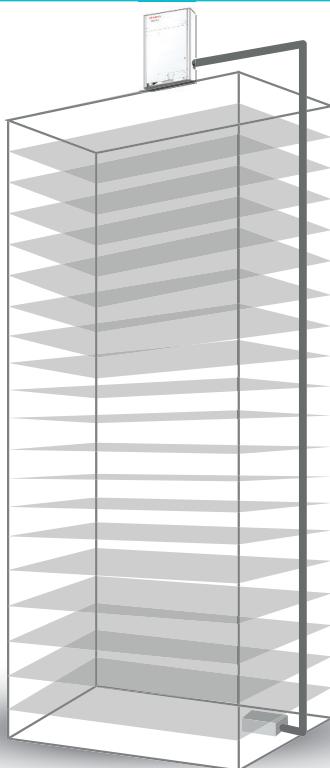

Up to 128 indoor
Large IDU connection

Max 120HP by 5 units connection


Large system capacity

Max 200% combination
High diversity



> FLEXIBLE FREE COMBINATION

Combinations examples - SMMS ∞ 52HP total 69 combinations

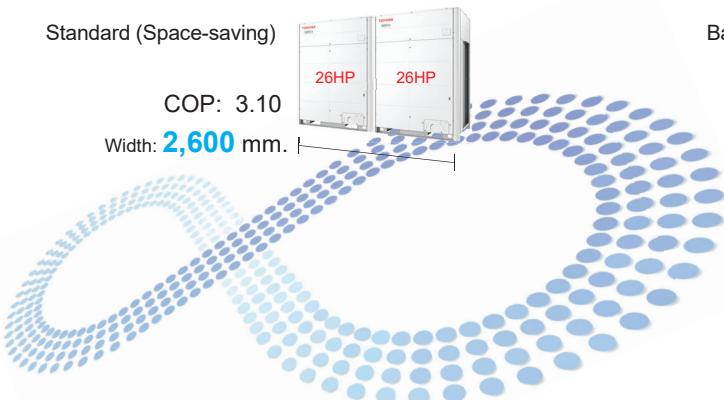

Unit combination can be customized to meet the installation site requirement.


Total
4000
combination pattern is available



Note: Outdoor unit still should align from larger to smaller HP



COMFORT ABOVE ALL

› WIDE OPERATING TEMPERATURE RANGE

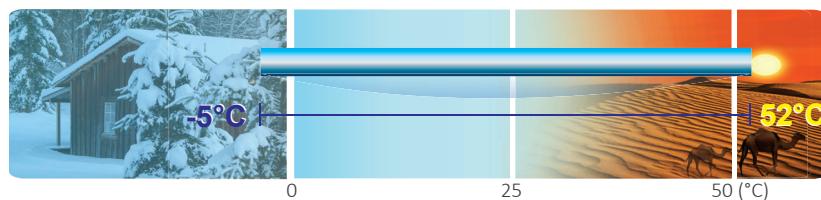

The refrigerant heat sink can bring down temperature of electronic parts. By using this new function, SMMS ∞ can operate in high ambient condition such as 52°C.

SMMS ∞ can select optimal heat exchanger size based on operating mode, outdoor temp, and capacity load. It allows SMMS ∞ to realize high efficiency, not only for full load operation but also for part load operation.

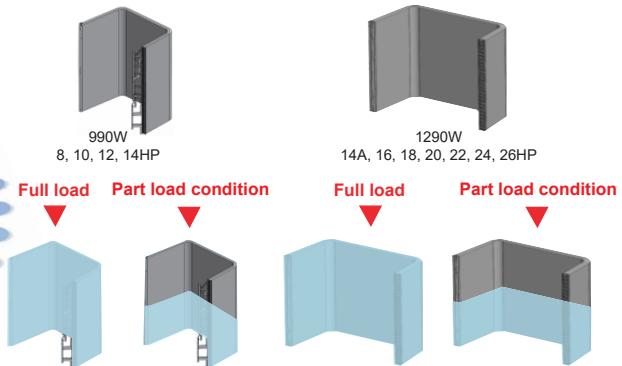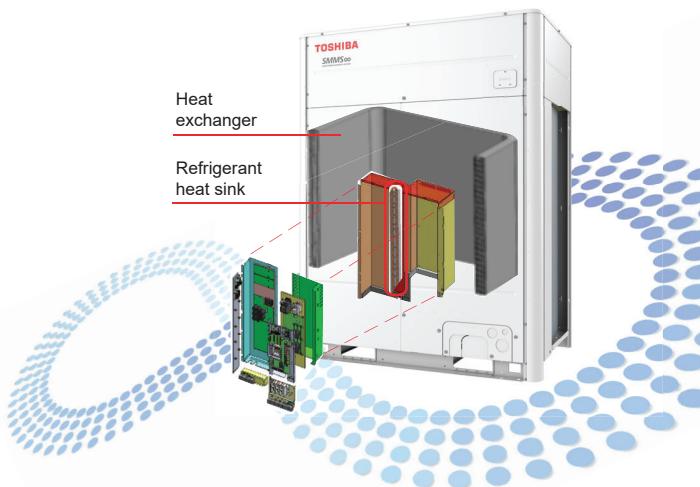

› STRONG ADAPTABILITY

SMMS ∞ integrates new features to adapt operations to local constraints with a constant target: the alliance of comfort and energy savings.



Heat exchanger usage area automatically varies depending on workload, maximizing energy savings and system reliability.

Split heat exchanger



Smart Grid ready with remote or dry contact demand control function.

Demand control



Automatic backup in case of combinations systems failure.

Auto backup function



Smart control to automatically equalize compressor operating hours.

Rotation drive



Inverter box is fully sealed up in order to avoid malfunction due to small animals.




Automatic refrigerant charge to minimize installation workload.

Auto refrigerant charge


INSTALLATION FLEXIBILITY

Reusable pipes and IDU


Toshiba SMMS[∞] comes with the flexibility of reusing pipes and IDU of the existing VRF solution. This flexibility lets SMMS[∞] replace any VRF solution in a shorter time. SMMS[∞] is a cost-effective solution as it allows you to replace both IDU and ODU in different intervals.

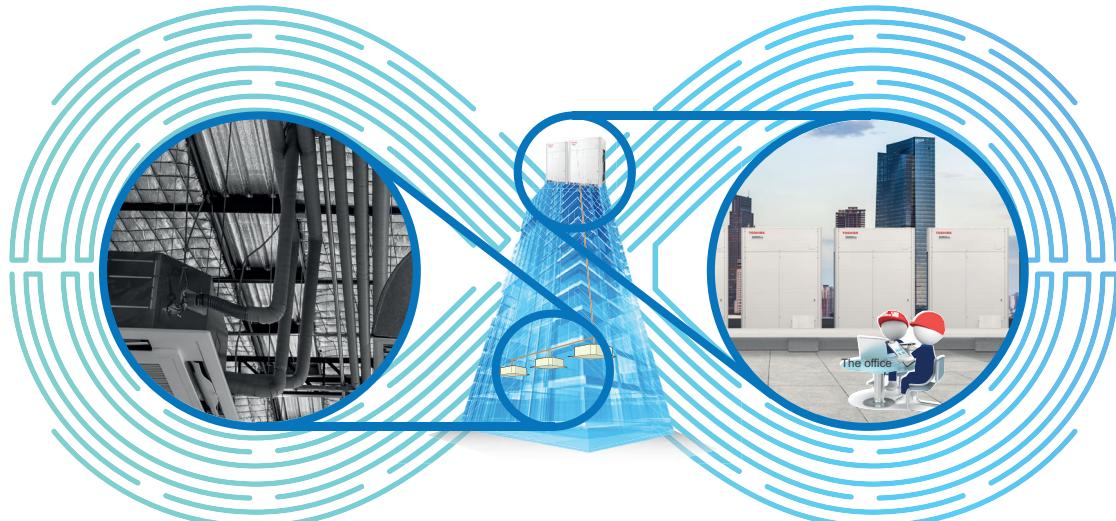

Conventional VRF

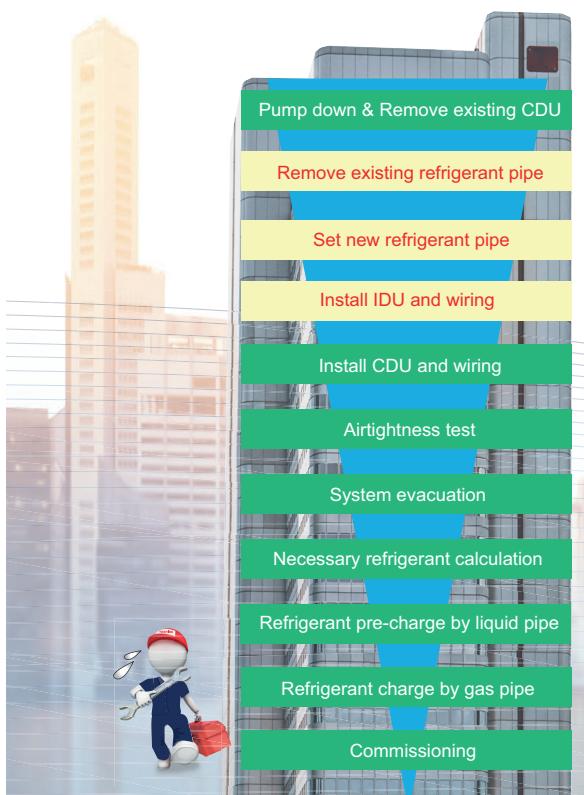

SMMS[∞]


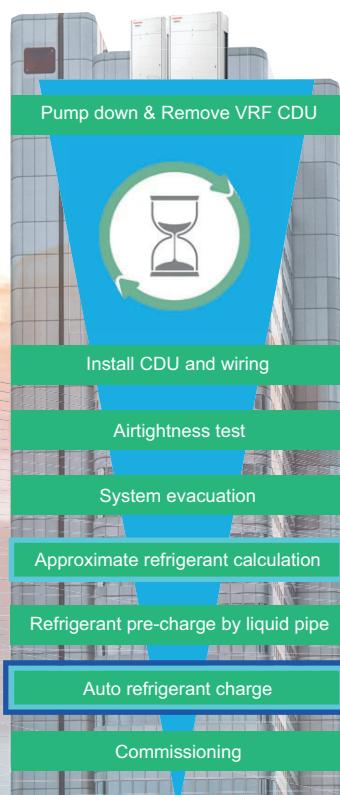


RELIABILITY

Toshiba SMMS ∞ uses a "Double-pipe subcool heat exchanger" that transforms the charging refrigerant completely from liquid to gas phase. Therefore, even during high-speed refrigerant charge conditions, SMMS ∞ reduces the risk of liquid compression.

ACCURACY

Toshiba SMMS ∞ senses temperature data through "Double-pipe subcool heat exchanger" and "IDU PMV condition" to identify the required refrigerant amount accurately.

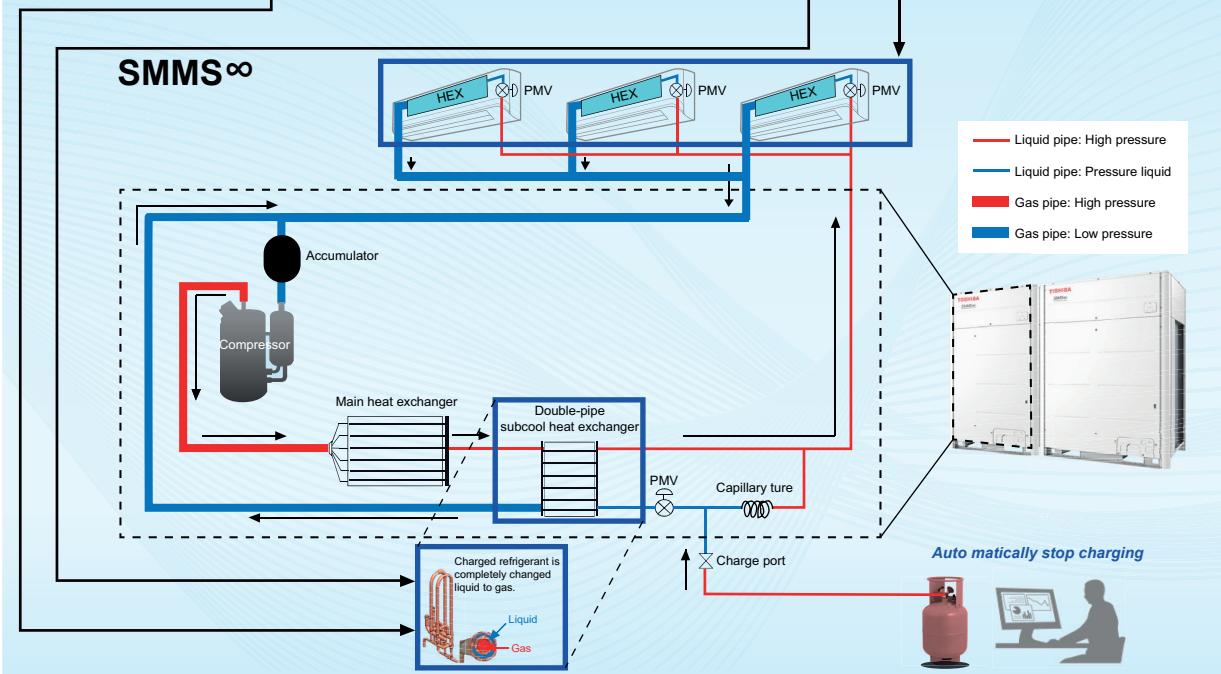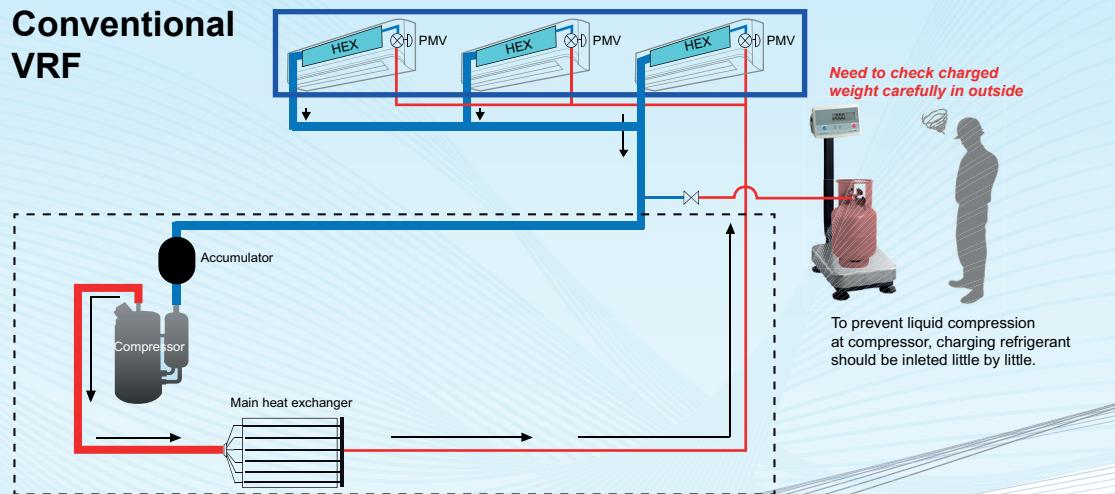SMMS ∞ **Conventional VRF**

2PIPE VRF COOLING ONLY

MMY-MUP_1T8(J)P-T
SMMS∞

>NEW



With new chassis, new compressor, new heat exchanger, the SMMS∞, latest generation of Toshiba VRF, is customized for efficiency, customized to help you ace.

CAPACITY
↑
8 HP ~ 120 HP

OPERATION
0° ~ +52°C
-5°C ~ +52°C

SMMS∞

Performances


Outdoor unit	MMY-	MUP0801T8P	MUP1001T8P	MUP1201T8P	MUP1401T8P	MUP14A1T8P	MUP1601T8P	MUP1801T8P	MUP2001T8P	MUP2201T8P	MUP2401T8P	MUP2601T8P
Outdoor unit (Anti-Corrosion)	MMY-	MUP0801T8JP	MUP1001T8JP	MUP1201T8JP	MUP1401T8JP	MUP14A1T8JP	MUP1601T8JP	MUP1801T8JP	MUP2001T8JP	MUP2201T8JP	MUP2401T8JP	MUP2601T8JP
Cooling capacity	kW	8 HP	10 HP	12 HP	14 HP	14 HP	16 HP	18 HP	20 HP	22 HP	24 HP	26 HP
BTU (27.0 C DB/19.0 C WB)		22.4	28.0	33.5	40.0	40.0	45.0	50.4	56.0	61.5	67.0	73.0
BTU (27.0 C DB/19.5 C WB)		76,400	95,500	114,300	136,400	136,400	154,000	172,000	191,000	210,000	228,600	250,000
COP (Capacity 100%)	kW/kW	5.21	4.51	4.40	3.87	4.62	4.24	3.93	3.79	3.64	3.29	3.10
COP (Capacity 50%)	kW/kW	8.62	8.33	7.94	6.97	7.75	7.55	6.67	6.41	6.45	6.25	5.95
Maximum overcurrent protection	A	20	25	25	32	40	50	50	50	63	63	63
Capacity control	%	10-100	10-100	8-100	7-100	7-100	6-100	6-100	5-100	5-100	4-100	4-100
Air flow	m³/h	9900	10500	11700	11880	13750	14300	14300	15200	16500	16500	18200
Sound power level	dB(A)	76.0	77.0	79.0	82.0	80.0	82.0	82.0	83.0	86.0	86.0	88.0
Sound pressure level	dB(A)	53.0	55.0	58.0	58.0	59.0	60.0	61.0	61.0	63.0	63.0	66.0
Number of fan	unit	1	1	1	1	1	1	1	1	2	2	2
External static pressure available	Pa	80	80	80	80	80	80	80	50	80	80	80
Dimensions (h x w x d)	mm	1690 x 990 x 780	1690 x 1290 x 780	1690 x 1290 x 780	1690 x 1290 x 780	1690 x 1290 x 780	1690 x 1290 x 780	1690 x 1290 x 780	1690 x 1290 x 780			
Weight	kg	223	223	223	223	294	294	294	294	329	329	329
Compressor type		Hermetic Twin Rotary	Hermetic Twin Rotary	Hermetic Twin Rotary	Hermetic Twin Rotary	2 x Hermetic Twin Rotary						
Refrigerant charge R410A	kg	6.0	6.0	6.0	6.0	9.0	9.0	9.0	9.0	9.0	9.0	9.0
Gas line type - diameter	mm	Brazing - 19.1	Brazing - 22.2	Brazing - 28.6	Brazing - 28.6	Brazing - 28.6	Brazing - 28.6	Brazing - 28.6	Brazing - 28.6	Brazing - 34.9	Brazing - 34.9	Brazing - 34.9
Liquid line type - diameter	mm	Brazing - 12.7	Brazing - 12.7	Brazing - 12.7	Brazing - 15.9	Brazing - 15.9	Brazing - 15.9	Brazing - 15.9	Brazing - 19.1	Brazing - 19.1	Brazing - 19.1	Brazing - 19.1
Farthest piping equivalent length	m	210	210	210	210	210	210	210	210	210	210	210
Farthest piping real length	m	190	190	190	190	190	190	190	190	190	190	190
Maximum total piping length	m	500	500	500	500	500	500	500	500	500	500	500
Maximum lift (indoor unit above/below)	m	40 / 110*1	40 / 110*1	40 / 110*1	40 / 110*1	40 / 110*1	40 / 110*1	40 / 110*1	40 / 110*1	40 / 110*1	40 / 110*1	40 / 110*1
Operating range - DB	°C	-5/52	-5/52	-5/52	-5/52	-5/52	-5/52	-5/52	-5/52	-5/52	-5/52	-5/52
Power supply	V-ph-Hz	400(380/415)-3-50	400(380/415)-3-50	400(380/415)-3-50	400(380/415)-3-50	400(380/415)-3-50	400(380/415)-3-50	400(380/415)-3-50	400(380/415)-3-50	400(380/415)-3-50	400(380/415)-3-50	400(380/415)-3-50

Installation space


MMY-MUP0801T8(J)P, MMY-MUP1001T8(J)P,
MMY-MUP1201T8(J)P, MMY-MUP1401T8(J)P

MMY-MUP14A1T8(J)P, MMY-MUP1601T8(J)P,
MMY-MUP1801T8(J)P, MMY-MUP2001T8(J)P


MMY-MUP2201T8(J)P, MMY-MUP2401T8(J)P,
MMY-MUP2601T8(J)P

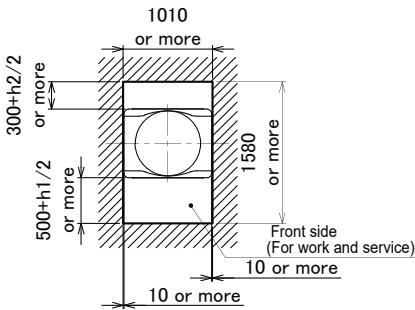

Space required for service

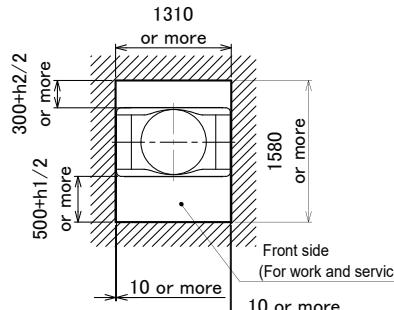

Space required for service

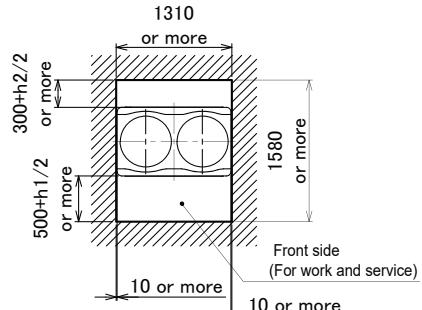

Space required for service

Leave space necessary for running, installation and servicing.

- If there is an obstacle above the outdoor unit, leave a space of 2000 mm or more to the top end of the outdoor unit.
- If there is a wall around the outdoor unit, make sure that its height does not exceed 800 mm.

Capacity table

CDU

HP	Cooling (kW)	Capacity		Combination	Model	COP
		*BTU 1	*BTU 2			
8	22.4	76,400	77,300	-	MMY-MUP0801T8(J)P	5.21
10	28.0	95,500	96,700	-	MMY-MUP1001T8(J)P	4.51
12	33.5	114,300	115,700	-	MMY-MUP1201T8(J)P	4.40
14	40.0	136,400	138,100	-	MMY-MUP1401T8(J)P	3.87
14	40.0	136,400	138,100	-	MMY-MUP14A1T8(J)P	4.62
16	45.0	154,000	156,000	-	MMY-MUP1601T8(J)P	4.24
18	50.4	172,000	174,000	-	MMY-MUP1801T8(J)P	3.93
20	56.0	191,000	193,400	-	MMY-MUP2001T8(J)P	3.79
22	61.5	210,000	212,700	-	MMY-MUP2201T8(J)P	3.64
24	67.0	228,600	231,500	-	MMY-MUP2401T8(J)P	3.29
26	73.0	250,000	253,000	-	MMY-MUP2601T8(J)P	3.10
28	80.0	272,800	276,300	14+14	MMY-UP2811T8(J)P	3.90
30	83.9	290,400	294,100	18+12	MMY-UP3011T8(J)P	4.10
32	89.5	308,000	312,000	20+12	MMY-UP3211T8(J)P	4.00
34	95.0	326,000	330,200	22+12	MMY-UP3411T8(J)P	3.90
36	100.5	344,000	348,400	24+12	MMY-UP3611T8(J)P	3.60
38	106.5	364,000	368,700	26+12	MMY-UP3811T8(J)P	3.40
40	113.0	382,000	386,900	26+14	MMY-UP4011T8(J)P	3.30
42	117.5	401,000	406,200	22+20	MMY-UP4211T8(J)P	3.70
44	123.0	420,000	425,400	22+22	MMY-UP4411T8(J)P	3.60
46	128.5	444,400	450,100	24+22	MMY-UP4611T8(J)P	3.50
48	134.0	462,000	468,000	24+24	MMY-UP4811T8(J)P	3.30
50	140.0	480,000	486,200	26+24	MMY-UP5011T8(J)P	3.20
52	146.0	498,000	504,400	26+26	MMY-UP5211T8(J)P	3.10
54	151.0	516,000	522,700	22+20+12	MMY-UP5411T8(J)P	3.80
56	156.5	535,000	541,900	22+22+12	MMY-UP5611T8(J)P	3.80
58	162.0	554,000	561,200	24+22+12	MMY-UP5811T8(J)P	3.60
60	167.5	574,000	581,400	24+24+12	MMY-UP6011T8(J)P	3.50
62	174.0	593,000	600,200	24+24+14	MMY-UP6211T8(J)P	3.40
64	179.5	612,000	619,400	26+26+12	MMY-UP6411T8(J)P	3.30
66	184.5	631,000	638,600	22+22+22	MMY-UP6611T8(J)P	3.60
68	190.0	650,000	657,800	24+24+20	MMY-UP6811T8(J)P	3.40
70	195.5	669,000	677,100	24+24+22	MMY-UP7011T8(J)P	3.40
72	201.0	686,000	694,300	24+24+24	MMY-UP7211T8(J)P	3.30
74	207.0	707,000	715,500	26+24+24	MMY-UP7411T8(J)P	3.20
76	213.0	726,000	734,800	26+26+24	MMY-UP7611T8(J)P	3.20
78	219.0	745,000	754,000	26+26+26	MMY-UP7811T8(J)P	3.10
80	223.5	764,000	773,200	24+22+22+12	MMY-UP8011T8(J)P	3.60
82	229.0	784,000	793,500	24+24+22+12	MMY-UP8211T8(J)P	3.50
84	234.5	803,000	812,700	24+24+24+12	MMY-UP8411T8(J)P	3.40
86	240.5	822,000	831,900	26+24+24+12	MMY-UP8611T8(J)P	3.40
88	246.5	841,000	851,100	26+26+24+12	MMY-UP8811T8(J)P	3.30
90	252.5	860,000	870,400	26+26+26+12	MMY-UP9011T8(J)P	3.20
92	259.0	879,000	889,600	26+26+26+14	MMY-UP9211T8(J)P	3.20
94	262.5	898,000	908,800	24+24+24+22	MMY-UP9411T8(J)P	3.40
96	268.0	917,000	928,100	24+24+24+24	MMY-UP9611T8(J)P	3.30
98	274.5	936,000	947,300	26+26+24+22	MMY-UP9811T8(J)P	3.30
100	280.0	955,000	966,500	26+26+24+24	MMY-UP10011T8(J)P	3.20
102	286.0	975,000	986,700	26+26+26+24	MMY-UP10211T8(J)P	3.10
104	292.5	994,000	1,006,000	26+26+26+14+12	MMY-UP10411T8(J)P	3.30
106	297.0	1,013,000	1,025,200	26+26+22+20+12	MMY-UP10611T8(J)P	3.40
108	302.4	1,032,000	1,044,400	26+26+24+24+8	MMY-UP10811T8(J)P	3.30
110	308.0	1,051,000	1,063,700	26+26+24+22+12	MMY-UP11011T8(J)P	3.40
112	313.5	1,070,000	1,082,900	26+26+24+24+12	MMY-UP11211T8(J)P	3.30
114	319.5	1,089,000	1,102,100	26+26+26+24+12	MMY-UP11411T8(J)P	3.20
116	326.0	1,108,000	1,121,300	26+26+26+24+14	MMY-UP11611T8(J)P	3.20
118	329.5	1,127,000	1,140,600	24+24+24+24+22	MMY-UP11811T8(J)P	3.40
120	335.0	1,146,000	1,159,800	24+24+24+24+24	MMY-UP12011T8(J)P	3.30

* BTU 1 Indoor air temperature 27.0°C DB/ 19.0°C WB ,Outdoor temperature 35°C DB

* BTU 2 Indoor air temperature 27.0°C DB/ 19.5°C WB ,Outdoor temperature 35°C DB



Piping rules

		Allowable value	Piping section
Piping length	"Total extension of pipe (Liquid pipe, real length)"	Single ODU Combination ODU	LA+LB+LC+La+Lb+Lc+Ld+Le+L1+L2+L3 +L4+L5+L6+L7+a+b+c+d+e+f+g+h+i+j
	Farthest piping length (*1)	Equivalent length Real length	LA+LB+LC+Le+L1+L3+L4+L5+L6+j
	Equivalent length of farthest piping form 1st branching (*1)	90m (*2)	L3 + L4 + L5 + L6 + j
	Equivalent length of farthest piping between outdoor units	40m	LA+LB+LC+Le(LA+LB+LC+Ld)
Piping length	Max. equivalent length of main piping	Equivalent length Real length	L1
	Max. equivalent length of outdoor unit connecting piping	120m (*3) 100m (*3)	
	Max. real length of indoor unit connecting piping	10m	Le(La, Lb, Lc, Ld)
	Max. equivalent length between branches	30m	a, b, c, d, e, f, g, h, i, j
Difference in height	Height between indoor and outdoor units	Upper outdoor unit Lower outdoor unit	50m (*9)
	Height between indoor units	50m (*9)	-
	Height between outdoor units	5m	-

(*1) : (e) is outdoor unit farthest from the 1st branch and (j) is the indoor unit farthest from the 1st branch.

(*2) : If the height difference (H1) between indoor and outdoor unit exceeds 3 m, set 65m or less.

(*3) : If the max. combined outdoor unit capacity is 54HP or more, then max. equivalent length is 70 m or less (real length is 50 m or less).

(*4) : If the height difference (H2) between indoor units exceeds 3 m, set 50 m or less.

(*5) : If the height difference (H2) between indoor units exceeds 3 m, set 30 m or less.

(*6) : Total charging refrigerant is 140kg or less.

(*7) : Extension up till 110m is possible with conditions below:


- Single outdoor unit system
- Connected ratio of indoor units to outdoor units is below 105%
- Liquid side is been increased 1 size from the standard size
- Height between indoor units is equal or less than 40 m.

(*8) : Extension up till 110m is possible with conditions below :

- Height between indoor units is equal or less than 3 m.
- Connected ratio of indoor units to outdoor units is below 105%
- Minimum capacity of connecting indoor unit is more than 3HP


(*9) : If the connected ratio of indoor units to outdoor units is more than 105%, set 15 m.

Drawings


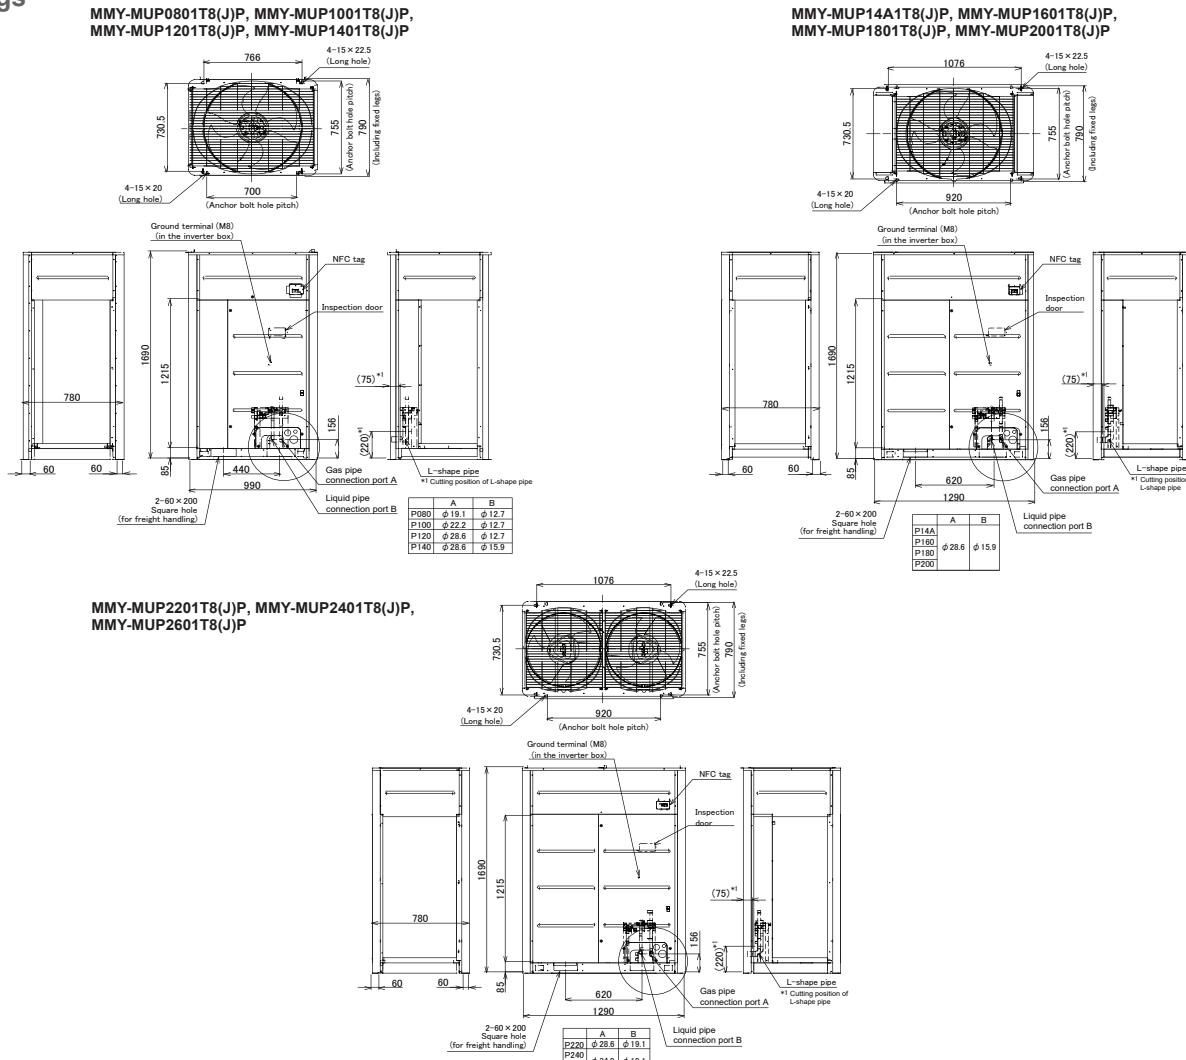


Sound pressure levels


MMY-MUP0801T8(J)P

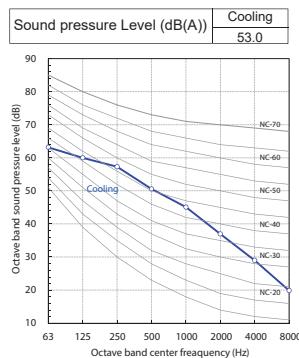




MMY-MUP1001T8(J)P

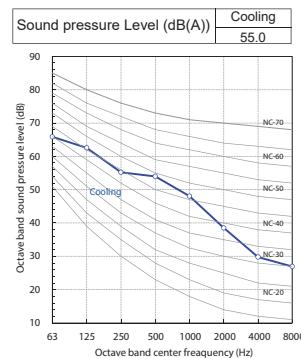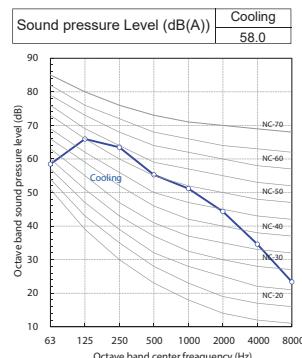MMY-MUP1201T8(J)P,
MMY-MUP1401T8(J)P


MMY-MUP14A1T8(J)P

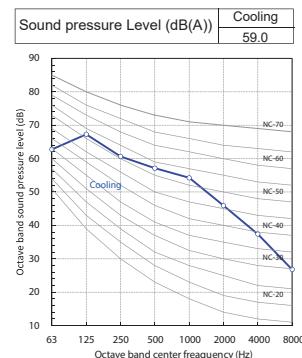

MMY-MUP1601T8(J)P

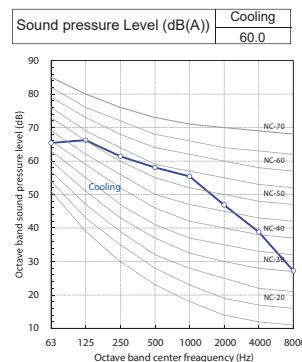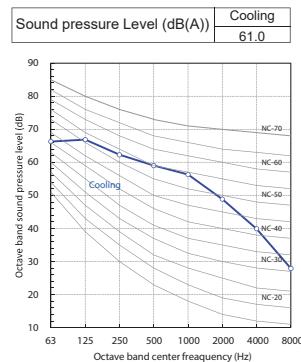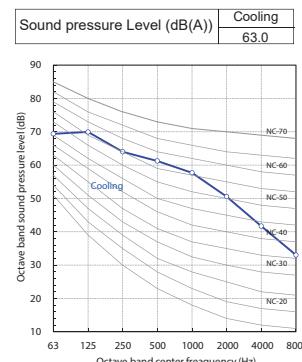MMY-MUP1801T8(J)P,
MMY-MUP2001T8(J)PMMY-MUP2201T8(J)P,
MMY-MUP2401T8(J)P

MMY-MUP2601T8(J)P

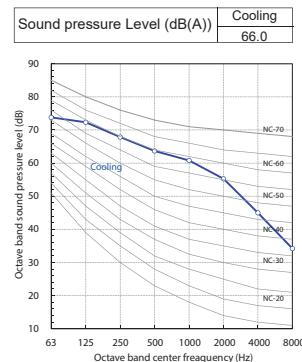

Night mode sound pressure levels

Sound reduction and approximation capacity (reference)

Type	"Night operation sound reduction dB (A)"	Cooling capacity
801	50	85%
1001	50	70%
1201	50	60%
1401	50	60%
14A1	53	70%
1601	53	70%
1801	54	65%
2001	54	60%
2201	52	55%
2401	53	55%
2601	53	55%

Condition: Cooling: (Indoor 27°DB, 19°WB) - (Outdoor temperature 25°DB)


	Name	Model name	Capacity	Appearance	Remarks
Branching joints and headers	Y-shape branching joint	RBM-BY55E	under 6.4HP		
		RBM-BY105E	from 6.4 to 14.2HP		
		RBM-BY205E	from 14.2 to 25.2HP		
		RBM-BY305E	from 25.2 to 61.2HP		
		RBM-BY405E	61.2HP or more		
	4-branching header	RBM-HY1043E	under 14.2HP		
		RBM-HY2043E	from 14.2 to 25.2HP		
Optional PCB of outout unit	8-branching header	RBM-HY1083E	under 14.2HP		
		RBM-HY2083E	from 14.2 to 25.2HP		
		RBM-BT14E	under 26HP		
	Branching joint for connection of outdoor units	RBM-BT24E	from 26HP to 62HP		
		RBM-BT34E	62HP or more		
	Power peak-cut control board	TCB-PCDM4E			Limit capacity of the VRF outdoor unit at 85%, 75%, 70% or 60% load or stop it. Dry contact
	External master ON/OFF control board	TCB-PCM04E			Dry contact
	Output control board	TCB-PCIN4E			Operation output : The operation indicator is on while any indoor unit is operating. Error output : The error indicator is on when an error is occurred on even one of the indoor or outdoor units in the system. Dry contact

WIDE CHOICE INDOOR UNITS

› LARGE INDOOR UNIT LINE-UP

The wide range of indoor units help enhanced design flexibility and lower costs, ensuring efficiency in installing a perfect system.

- 18 different types of indoor units
- Capacity from 0.8 HP to 20 HP
- For cooling and fresh air production

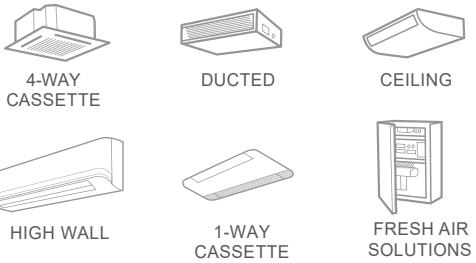

› SUPERIOR AIR COMFORT


Cool comfort with soft cooling mode

The development of the soft cooling mode provides a new level of cooling to personalize the air flow intensity, angle and direction directly from the remote control and enjoy the indoor environment at the right temperature without being exposed to the direct cold draft.




Special coated for IDU heat exchanger

With a specially coated heat exchanger, Toshiba IDU provides odorless and fresh air always. This special coating enables the dust particles on the heat exchanger to be washed out along with condensed water.

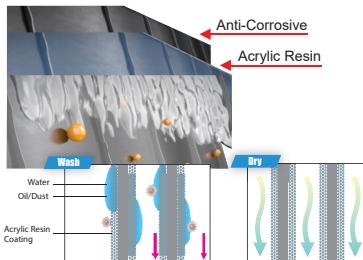

Air purifier solution

Air purifier kit removes small particles by high-quality filter and Plasma solution. This new solution traps mold, pollen and PM2.5 particle by electrostatic force. Moreover, the users are notified of the air quality level by the LED indicator color.

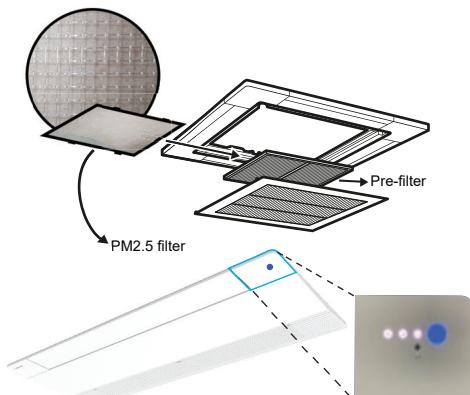

Low consumption for low operation cost

Premium comfort doesn't mean high power consumption. By using DC motor, large air discharge surface and resin coating system, Toshiba reduces drastically the indoor unit power consumption.

Color	Blue	Green	Yellow	Red
Air quality category	GOOD	Moderate	Unhealthy	Very Unhealthy

Example for Compact 4-Way Cassette (0.8HP)



	PCB	FAN	DRAIN	TOTAL
Low fan speed	4 W	6 W	3 W	13 W
Medium fan speed	4 W	7 W	3 W	14 W
High fan speed	4 W	9 W	3 W	16 W

CHOOSE YOUR ADAPTED SYSTEM SOLUTION

IDU

NEW
indoor
units

1-Way Cassette




Fresh Air Intake



Dx-coil interface advance



Zoning Airconditioning Unit

NEW
Air purifier
solutionPM2.5 filter
4-Way CassetteAir purifier kit
1-Way CassetteAir purifier kit
4-Way CassettePM2.5 dust sensor
Air Quality Indicator

- Blue : Air quality "Good"
- Green : Air quality "Moderate"
- Yellow : Air quality "Unhealthy"
- Red : Air quality "Very Unhealthy"

SMMS∞ Indoor units

Model	(HP) (kW)	0.8 2.2	1.0 2.8	1.25 3.6	1.7 4.5	2.0 5.6	2.5 7.1	3.0 8.0	3.2 9.0	4.0 11.2	5.0 14.0	6.0 16.0	8.0 22.4	10.0 28.0	12.0 34.0	14.0 40.0	16.0 45.0	18.0 50.4	20.0 56.0
4-way Cassette High performance MMU-UP_1H-E																			
4-way Cassette MMU-UP_1HP-T																			
Compact 4-way Cassette MMU-UP_1MH-E																			
2-way Cassette MMU-UP_1WH-E																			
1-way Cassette MMU-UP_1YHP-T																			
Slim Duct MMD-UP_1SPHY-E																			
Concealed Duct MMD-UP_1BHP-T																			
Concealed Duct High Static Pressure MMD-UP_1HP-T																			
Fresh Air Intake MMD-UP_1HFP-T																			
Ceiling MMC-UP_1HP-T																			
High Wall MMK-UP_1HP-T																			
Zoning Airconditioning Unit MMZ-UP_1F/D																			
Floor Standing Concealed MML-UP_1BH-E																			
Floor Standing Cabinet MML-UP_1H-E																			
Console MML-UP_1NHP-E																			
Floor Standing MMF-UP_1H-E																			
Large Capacity Floor Standing *1 MMF-AP_5(D)HP-VA/VB																			
Air-to-Air Heat exchanger with DX-coil *1 MMD-VN_2HEX1E(2)																			
Dx-coil interface advance TCB-IFDMX01UP-E & RBM-A_1UPVA-E																			


Model	Air flow in m3/h	150	250	350	500	650	800	1000	1500	2000
Air-to-Air Heat exchanger *1 VN-M_0HE										

* New chassis

*1: Because these models can support only old communication protocol, please communicate with local distributor if you want to connect these indoor units.

IAQ SOLUTION

> PARTICLE SIZE OF PM2.5

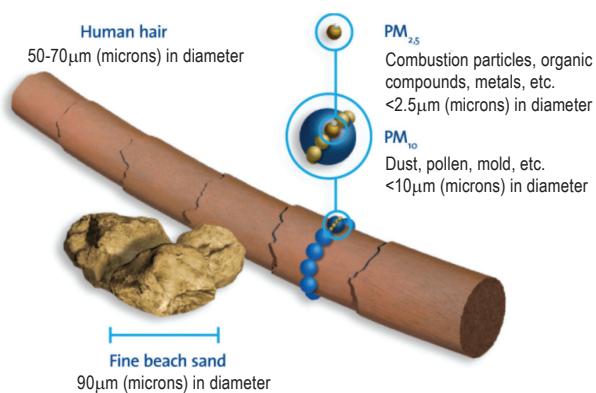

> IMPACT FOR...


Impact for air conditioner

The accumulation of dust particles on the heat exchanger reduces the overall efficiency of air conditioners and air volume. It leads to poor indoor air quality and impacts the health of occupants. It also reduces the life span of the air conditioner.



Impact for human health



PM_{2.5} particles have risk to penetrate deep into the respiratory tract. Moreover, some particles may even get into the bloodstream and causing severe health damage.

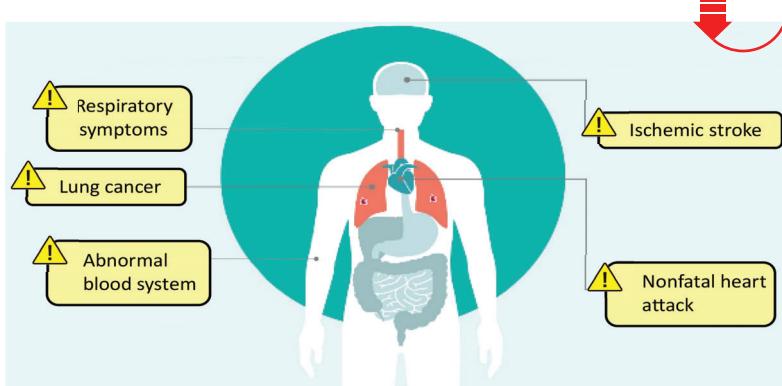

> SOLUTION TO...

Solution to keep the heat exchanger of indoor unit stays clean always

Acrylic resin coated heat exchanger enables the dust particles on the fin to be washed out along with drain water. This keeps the heat exchanger always clean, with better cooling performance.

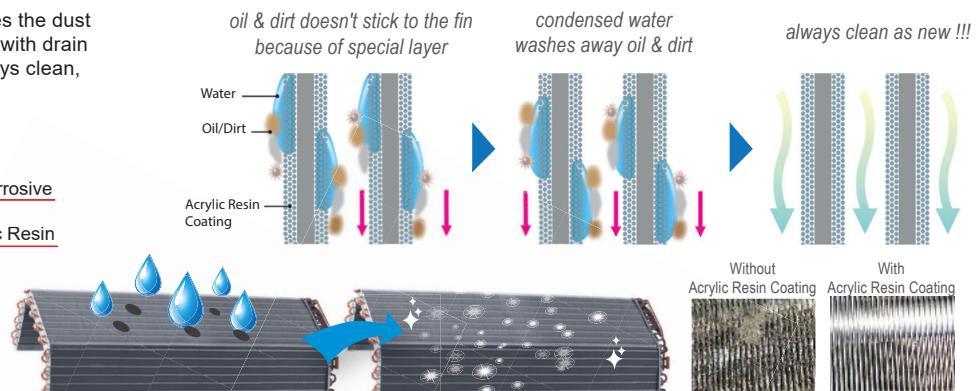
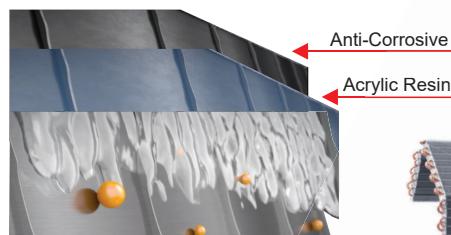


INDOOR AIR QUALITY SOLUTION



> SOLUTION TO...

Solution to keep the indoor air clean


NEW PM2.5 filter

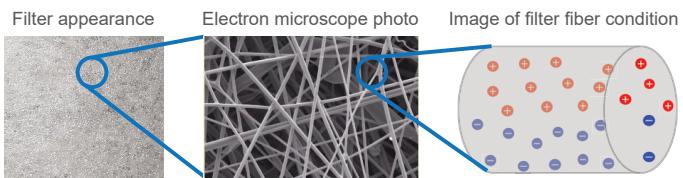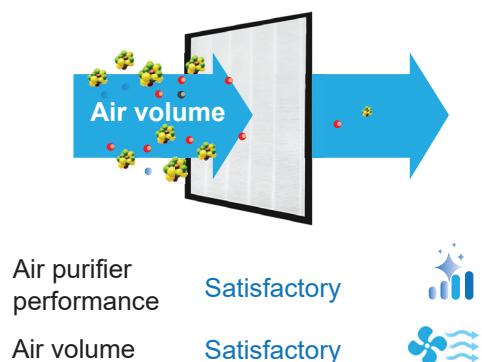

PM2.5 filter has "Electrostatic" solution.
Each fiber of PM2.5 filter captures PM2.5 particles by Electrostatic force, achieving effective filtration despite a thinner filter.

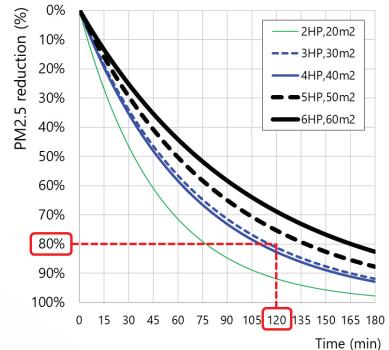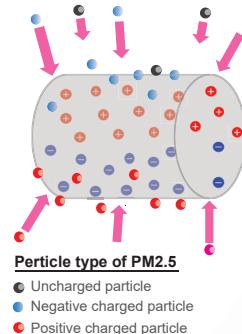

NEW Plasma Air purifier (1way cassette)

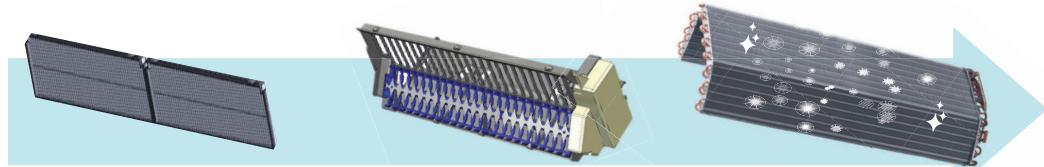

Pre-filter
Pre filter captures the large dust particles

Plasma Air purifier

Resin coated heat exchanger

Due to the special coating on the heat exchanger, the pollutants do not accumulate and get drained out with condensing water.



Plasma ionizer forces impurities to adopt a negative electrical charge



Pollutants become negative charge



Negatively charged pollutants get attracted towards the heat exchanger.



The dust sensor detects PM2.5 and PM10 concentrations and sends PM concentration data to the Air Quality indicator. The Air Quality indicator then displays the color basis whatever is maximum between PM2.5 and PM10 as per the following criteria:

Color	Blue	Green	Yellow	Red
Air quality category				
PM 2.5 ($\mu\text{g}/\text{m}^3$)	0-15	16-35	36-75	> 76
PM 10 ($\mu\text{g}/\text{m}^3$)	0-30	31-80	81-150	> 151

CASSETTE

MMU-UP_1H-E 4-WAY CASSETTE HIGH PERFORMANCE



High efficiency 4-Way Cassette, simple and elegant design which fits various indoor space. It has a unique flap style for optimal air distribution.



LOCAL CONTROLS



RBC-AXU41U-E



RBC-ASCU11-E
RBC-AMTU31-E
RBC-AMSU51-EN/ES

Features


Model name	MMU-	Standard										High efficiency	
		UP0091H-E	UP0121H-E	UP0151H-E	UP0181H-E	UP0241H-E	UP0271H-E	UP0301H-E	UP0361H-E	UP0481H-E	UP0561H-E	UP0092	UP0122
Cooling capacity	kW	2.8	3.6	4.5	5.6	7.1	8.0	9.0	11.2	14.0	16.0	2.8	3.6
Electrical characteristics	Power supply	1-phase 230V (220-240V) 50Hz / 1-phase 220V (208-230V) 60Hz											
	Running current (50Hz/60Hz)	A	0.17/0.18	0.19/0.20	0.25/0.26	0.36/0.38	0.46/0.48	0.57/0.60	0.90/0.94	0.92/0.96	0.93/0.97	0.20/0.21	0.20/0.21
	Power consumption (50Hz/60Hz)	kW	0.020/0.020	0.018/0.018	0.026/0.026	0.042/0.042	0.054/0.054	0.068/0.068	0.125/0.125	0.135/0.135	0.137/0.137	0.023/0.023	0.023/0.023
	Starting current (50Hz/60Hz)	A	0.26/0.27	0.29/0.30	0.37/0.39	0.55/0.57	0.69/0.72	0.86/0.90	1.35/1.41	1.38/1.44	1.40/1.46	0.30/0.32	0.30/0.32
Appearance	Main unit	Heat-insulating material attached - Zinc hot dipping steel plate											
	Ceiling panel name	RBC-U41PG(W)-E											
	Panel color	Gran White (Mansell 5PB9/1)											
Outer dimensions	Main unit (HxWxD)	mm	256x840x840					319x840x840				256x840x840	
	Ceiling panel (HxWxD)	mm						30x950x950					
Total weight	Main unit	kg	18					25				20	
	Ceiling panel	kg						5					
Heat exchanger		Finned tube											
Soundproof / Heat-insulating material		Non-flammable insulation											
Fan unit	Fan	Turbo fan											
	Standard air flow (H/M/L)	m³/h	846/768/708	1060/920/800	1260/1100/940	1380/1300/1120	1770/1380/1250	1940/1520/1400	2184/1596/1260	2262/1740/1368	2262/1782/1404	910/820/708	
	Motor output	W	60				130					60	
Sound pressure level (H/M/L)		dB(A)	30/28/26	32/30/28	36/33/31	41/37/35	42/37/35	44/39/37	45/38/32	46/39/33	46/40/35	35/33/30	
Sound power level		dB(A)	45	46	50	55	56	58	60	61	61	50	
Air filter		Standard filter supplied (Long life filter)											
Controller (Optional)		Wired or infrared remote controller											
Connecting pipe	Gas side	mm	9.5	9.5	12.7	12.7	15.9	15.9	15.9	15.9	15.9	9.5	9.5
	Liquid side	mm	6.4	6.4	6.4	6.4	9.5	9.5	9.5	9.5	9.5	6.4	6.4
	Drain port (nominal dia)	mm					25 (Polyvinyl chloride tube)						

Drawings


Unit : mm

MMU-UP0091H-E to MMU-UP0121H-E

MMU-UP0092 to MMU-UP0122

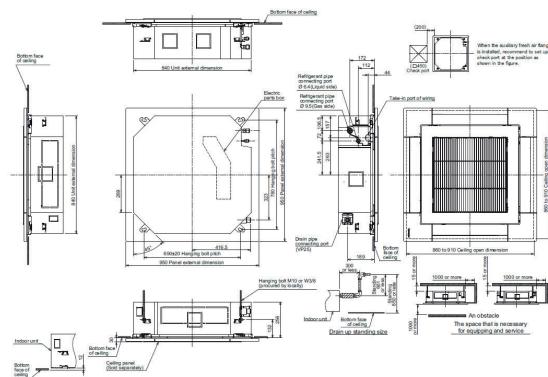


MMU-UP0151H-E to MMU-UP0561H-E

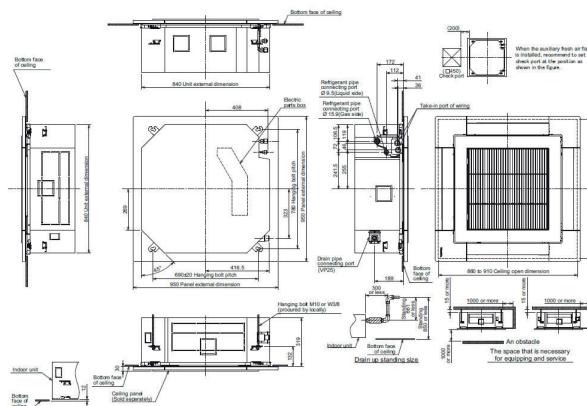


4-WAY CASSETTE HIGH PERFORMANCE

Sound pressure levels


MMU-UP0091, 0121H-E

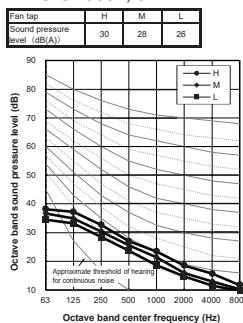


MMU-UP0151H-E

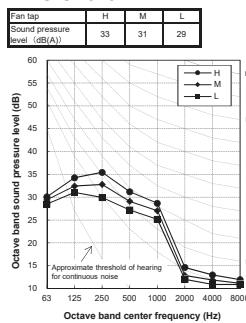


MMU-UP0181H-E

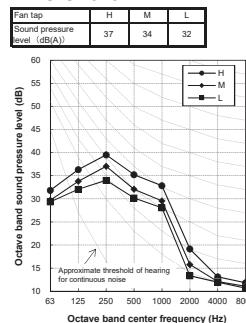

MMU-UP0241H-E

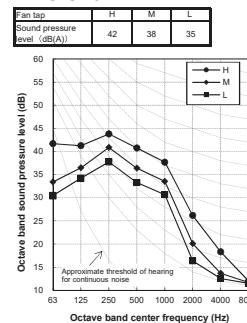


MMU-UP0271H-E

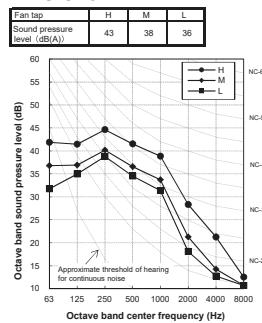


MMU-UP0301H-E

Fan tap	H	M	L
Sound pressure level (dB(A))	46	40	38

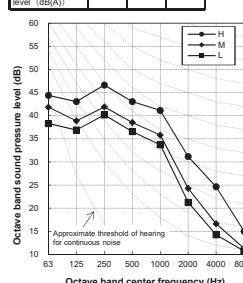


MMU-UP0361H-E

Fan tap	H	M	L
Sound pressure level (dB(A))	46	39	34

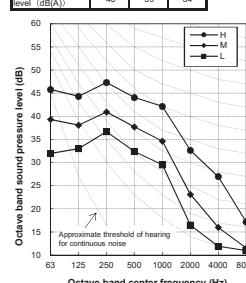


MMU-UP0481H-E

Fan tap	H	M	L
Sound pressure level (dB(A))	47	40	35

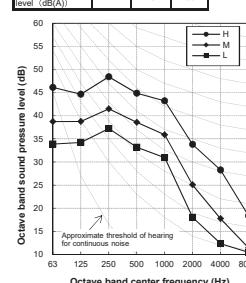

MMU-UP0561H-E


Fan tap	H	M	L
Sound pressure level (dB(A))	47	41	37

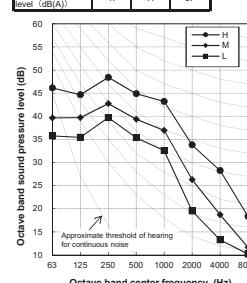


MMU-UP0092, 0122

Fan tap	H	M	L
Sound pressure level (dB(A))	35	33	30


Air diffusion

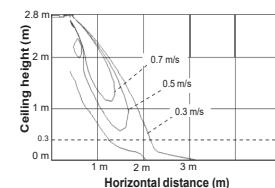MMU-UP0091, 0121H-E
MMU-UP0092, 0122


MMU-UP0151H-E

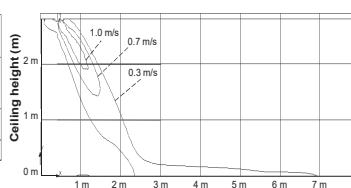


MMU-UP0181H-E

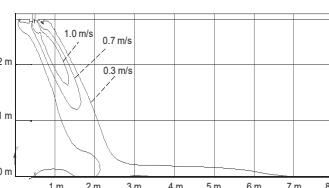


MMU-UP0241H-E

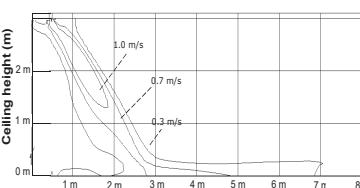


MMU-UP0271H-E

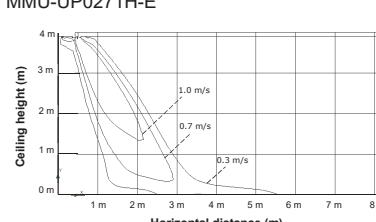

MMU-UP0301H-E

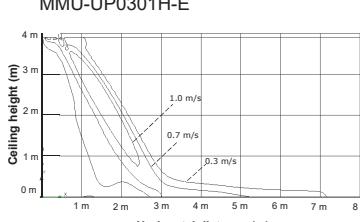

MMU-UP0361, 0481, 0561H-E

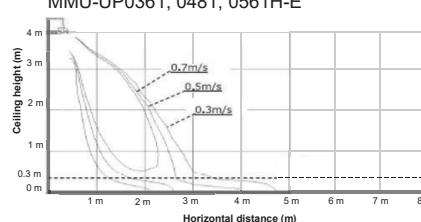

Accessories

No.	Part name	Model name	Applied model	Notes	Remarks
1	Ceiling panel	RBC-U41PG(W)-E	MMU-UP_1H-E	Required accessory	
2	Wireless remote controller	RBC-AXU41U-E		For installing on panel	
3	Wireless remote controller	RBC-AXU31-E		For installing as stand alone	
4	Fresh air chamber	TCB-GFC1603UE			
5	Space for height adjustment	TCB-SP1603UE			
6	Air discharge direction kit	TCB-BC1603UE			
7	Occupancy sensor	TCB-SIR41U-E			

4-way cassette high performance connectors

*: Available

CN32	CN60	CN61	CN70	CN73	CN80
Additional ventilation control from remote control	Operation status signal output (Cooling, fan, thermo-on)	External On/Off, operation output and alarm output	Warning symbol on remote control based on signal input.	Forced IDU thermo-off based on signal input	Forced IDU thermo-off and IDU lock based on signal input
*	*	*	*	*	*

MMU-UP_1HP-T

4-WAY CASSETTE



The 4-Way Cassette is designed to provide uniform air distribution and total user comfort. It is ideal for small commercial applications.



LOCAL CONTROLS



RBC-AXU31-E
RBC-AXU33UP-E



RBC-ASCU11-E
RBC-AMTU31-E
RBC-AMSU51-EN/ES

Features

Model name	MMU-	UP0091HP-T	UP0121HP-T	UP0151HP-T	UP0181HP-T	UP0241HP-T	UP0271HP-T	UP0301HP-T	UP0361HP-T	UP0481HP-T	UP0561HP-T												
Cooling capacity	kW	2.8	3.6	4.5	5.6	7.1	8.0	9.0	11.2	14.0	16.0												
	BTU (*1.1)	9,600	12,300	15,400	19,100	24,200	27,300	30,700	38,200	47,800	54,600												
	BTU (*1.2)	9,700	12,400	15,600	19,300	24,500	27,600	31,000	38,600	48,400	55,300												
Electrical characteristics	Power supply	1-phase 230V (220-240V) 50Hz / 1-phase 220V (208-230V) 60Hz																					
	Running current (50Hz/60Hz)	A	0.23/0.24	0.28/0.29	0.29/0.30	0.38/0.40	0.38/0.39	0.43/0.45	0.73/0.76	0.88/0.92													
	Power consumption (50Hz/60Hz)	kW	0.021/0.021	0.023/0.023	0.026/0.026	0.036/0.036	0.043/0.043	0.088/0.088	0.112/0.112														
	Starting current (50Hz/60Hz)	A	0.30/0.30	0.33/0.33	0.36/0.36	0.42/0.42	0.59/0.59	0.87/0.87	1.23/1.23	1.26/1.26													
Appearance	Main unit	Heat-insulating material attached - Zinc hot dipping steel plate																					
	Ceiling panel name	Standard panel: RBC-U32PGP-T / Smart panel: RBC-U33P-T																					
	Panel color	Standard panel: White (Munsell: 2.5GY9.0/0.5) / Smart panel: Gran White (Mansell 5PB9/1)																					
Outer dimensions	Main unit (HxWxD)	mm	256x840x840						319x840x840														
	Ceiling panel (HxWxD)	mm	30x950x950																				
Total weight	Main unit	kg	18	20			25																
	Ceiling panel	kg	4																				
Soundproof / Heat-insulating material	Non-flammable insulation																						
	Fan	Turbo fan																					
Fan unit	Standard air flow (H/M/L)	m³/h	800/730/680	930/830/790	1050/920/800	1290/920/800	1320/1100/850	1970/1430/1070	2130/1430/1130	2130/1520/1230													
	Motor output	W	14			20			68	72													
Sound pressure level (H/M/L)	dB(A)	30/29/27		31/29/27	32/29/27	35/31/28	38/33/30	43/38/32	46/38/33	46/40/33													
Sound power level	dB(A)	45		46	47	50	53	58	61	61													
Air filter	Standard filter supplied (Long life filter)																						
Connecting pipe	Gas side	mm	9.5	9.5	12.7	12.7	15.9	15.9	15.9	15.9	15.9												
	Liquid side	mm	6.4	6.4	6.4	6.4	9.5	9.5	9.5	9.5	9.5												
	Drain port (nominal dia)	mm	25 (Polyvinyl chloride tube)																				


Notes : 1) The cooling capacities are measured under the conditions specified by JIS B 8615 based on the reference piping

The reference piping consists of 5 m of main piping and 2.5 m of branch piping connected with 0 m height


(*1.1) Indoor air temperature 27.0 °C DB / 19.0 °C WB, outdoor air temperature 35.0 °C DB

(*1.2) Indoor air temperature 27.0 °C DB / 19.5 °C WB, outdoor air temperature 35.0 °C DB


Drawings

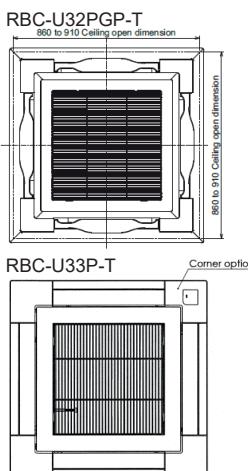

MMU-UP0091HP-T to MMU-UP0301HP-T

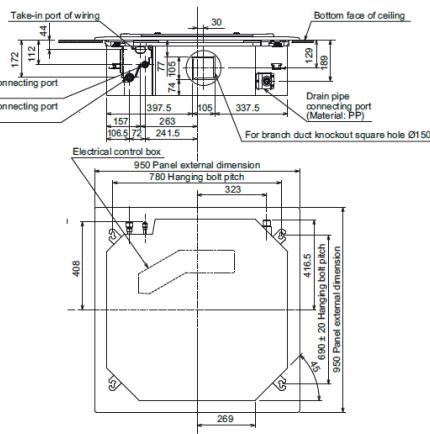


MMU-UP0361HP-T to MMU-UP0561HP-T

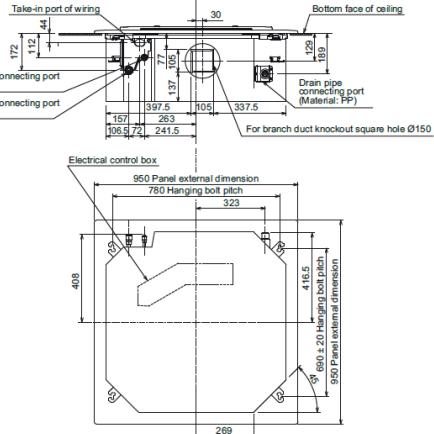


4-WAY CASSETTE

Sound pressure levels

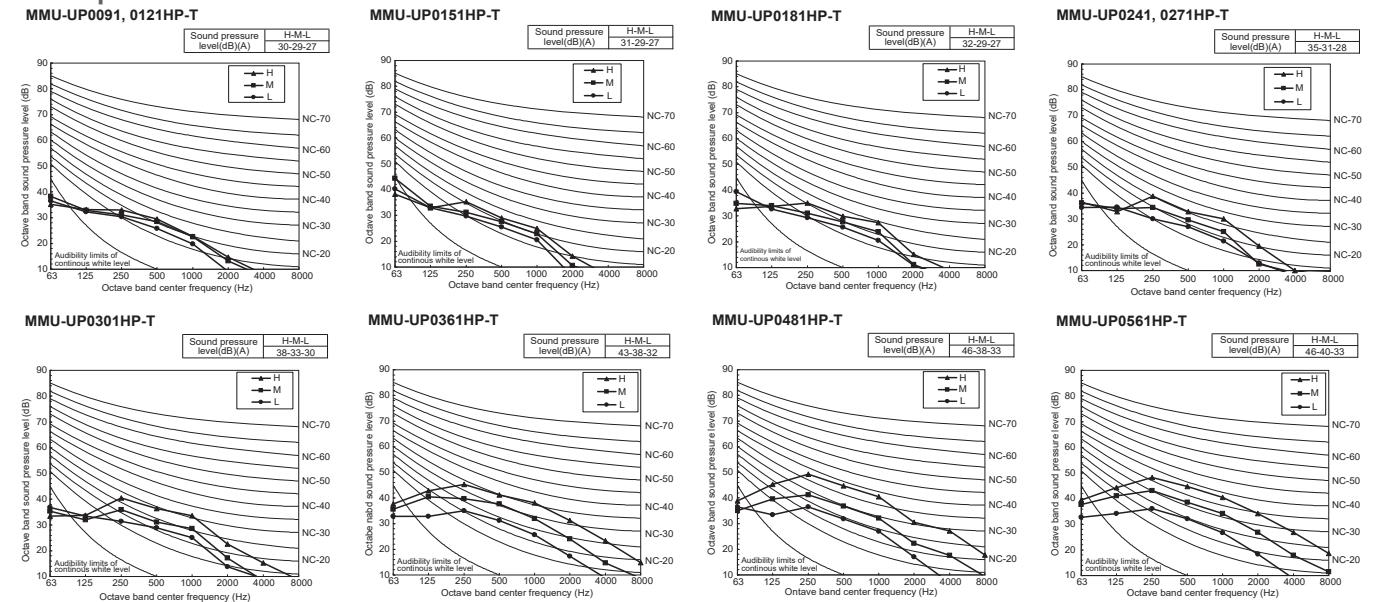

Air diffusion

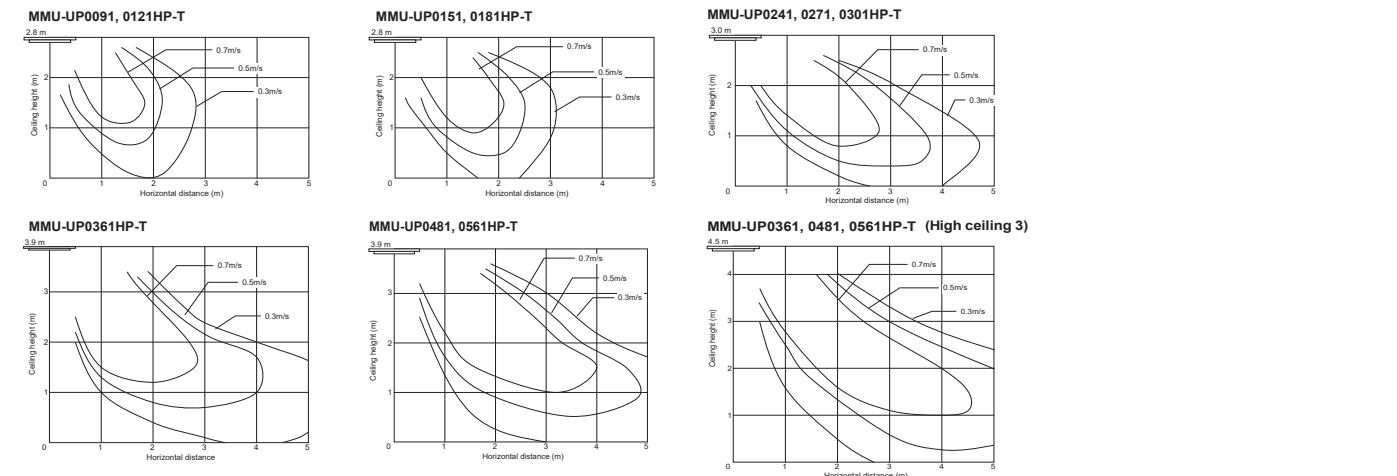

Accessories

No.	Part name	Model name	Applied model	Notes	Remarks
1	Ceiling panel (Wide-flow louver)	RBC-U32PGP-T	MMU-UP_1HP-T	Required accessory	
2	Ceiling panel (Smart design)	RBC-U33P-T		Required accessory	
3	Wireless remote controller	RBC-AXU31U-E		For Installing on panel	Use with RBC-U32PGP-E
4	Wireless remote controller	RBC-AXU31-E		For installing as stand alone	
5	Fresh air chamber	TCB-GFC1602UE			Use with TCB-GB1602UEE
6	Fresh air inlet box	TCB-GB1602UE		For fresh air intake by using the knockout hole of Fresh air and filter chamber. (dia.=100 mm)	Use with TCB-GFC1602UE
7	Auxiliary fresh air flange	TCB-FF101URE2		For easy fresh air intake by using the knockout hole of indoor unit. (dia.=100mm)	
8	Space for height adjustment	TCB-SP1602UE		Height 50 mm	
9	Air discharge direction kit	TCB-BC1602UE		Air direction change by cutting off air discharge port (3 pcs.)	
10	PM2.5 filter	TCB-PLFC1UPE-120		Before Pre-Filter type	
11	PM2.5 filter	TCB-PLFC2UPE-80		After Pre-Filter type	
12	Wireless remote controller	RBC-AXU33UP-E		*New product and coming soon	Use with RBC-U33P-E
13	Occupancy sensor	TCB-SIR33UP-E		*New product and coming soon	Use with RBC-U33P-E
14	Air purifier kit	TCB-EAPC1UCP-E		*New product and coming soon	Use with RBC-U33P-E

4-way cassette connectors

*: Available

CN32	CN60	CN61	CN70	CN73	CN80
Additional ventilation control from remote control	Operation status signal output (Cooling, fan, thermo-on) TCB-PCUC2E PCB needed	External On/Off, operation output and alarm output	Warning symbol on remote control based on signal input.	Forced IDU thermo-off based on signal input	Forced IDU thermo-off and IDU lock based on signal input
*		*	*	*	*

CASSETTE

MMU-UP_1MH-E COMPACT 4-WAY CASSETTE



The Compact 4-Way Cassette is especially designed for office applications, where a compact and efficient solution is required.



LOCAL CONTROLS



RBC-AXU31-E
RBC-AXU31UM-E



RBC-ASCU11-E
RBC-AMTU31-E
RBC-AMSU51-EN/ES

Features

Model name	MMU-	UP0071MH-E	UP0091MH-E	UP0121MH-E	UP0151MH-E	UP0181MH-E				
Cooling capacity	kW	2.2	2.8	3.6	4.5	5.6				
	BTU (*1.1)	7,500	9,600	12,300	15,400	19,100				
	BTU (*1.2)	7,600	9,700	12,400	15,600	19,300				
Electrical characteristics	Power supply	1-phase 230V (220-240V) 50Hz / 1-phase 220V (208-230V) 60Hz								
	Running current (50Hz/60Hz)	A	0.23/0.23	0.24/0.24	0.25/0.25	0.28/0.26				
	Power consumption (50Hz/60Hz)	kW	0.023/0.023	0.025/0.025	0.027/0.027	0.030/0.030				
	Starting current (50Hz/60Hz)	A	0.41/0.41	0.43/0.43	0.44/0.44	0.50/0.47				
Appearance	Main unit	Zinc hot dipping steel plate (Heat-insulating material attached to only upper plate)								
	Ceiling panel name	RBC-UM21PG(W)-E								
	Panel color	Gran White (Mansell 5PB9/1)								
Outer dimensions	Main unit (HxWxD)	mm	256x575x575							
	Ceiling panel (HxWxD)	mm	12x620x620							
Total weight	Main unit	kg	15							
	Ceiling panel	kg	2.5							
Soundproof / Heat-insulating material	Non-flammable insulation									
Fan unit	Fan	Turbo fan								
	Standard air flow (H/M/L)	m³/h	552/462/378	570/468/378	594/504/402	660/552/468				
	Motor output	W	60							
Sound pressure level (H/M/L)	dB(A)	37/33/29	38/33/29	38/34/30	40/35/31	47/39/34				
Sound power level	dB(A)	52	53	53	55	62				
Air filter	Standard filter supplied (Long life filter)									
Connecting pipe	Gas side	mm	9.5	9.5	9.5	12.7				
	Liquid side	mm	6.4	6.4	6.4	6.4				
	Drain port (nominal dia)	mm	VP20 (Polyvinyl chloride tube)							

Notes : 1) The cooling capacities are measured under the conditions specified by JIS B 8615 based on the reference piping

The reference piping consists of 5 m of main piping and 2.5 m of branch piping connected with 0 m height


(*1.1) Indoor air temperature 27.0 °C DB/ 19.0 °C WB, outdoor air temperature 35.0 °C DB

(*1.2) Indoor air temperature 27.0 °C DB/ 19.5 °C WB, outdoor air temperature 35.0 °C DB

Drawings

All model

Unit : mm

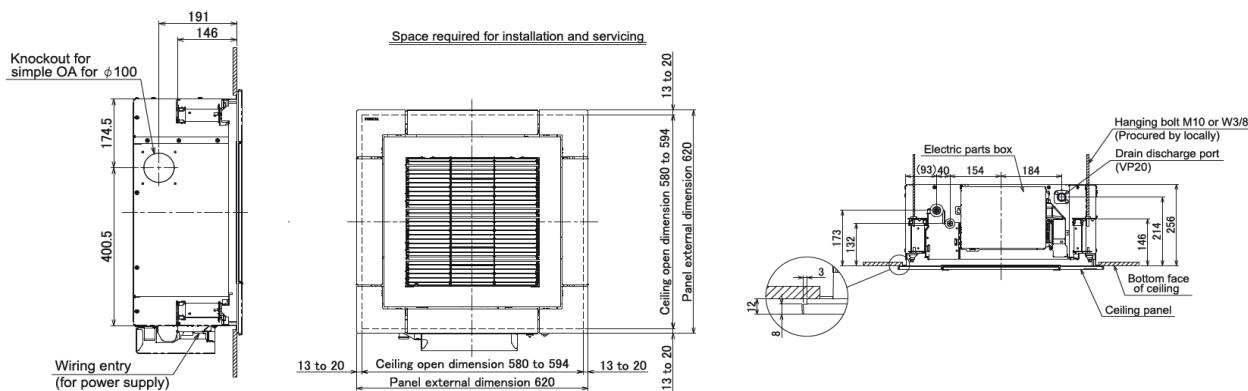


COMPACT 4-WAY CASSETTE

Sound pressure levels

Unit : dB(A)


MMU-UP0071MH-E

Fan tap	H	M	L
Sound pressure level (dB(A))	37	33	29

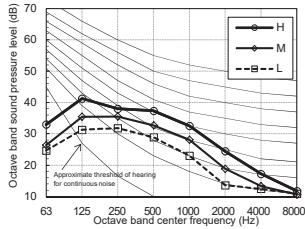


MMU-UP0091MH-E

Fan tap	H	M	L
Sound pressure level (dB(A))	38	33	29

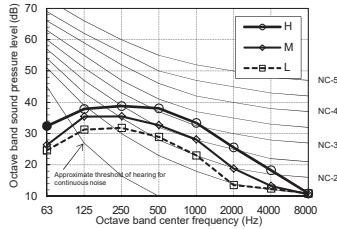


MMU-UP0121MH-E

Fan tap	H	M	L
Sound pressure level (dB(A))	38	34	30

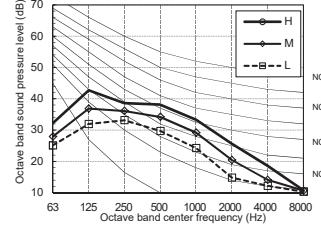


MMU-UP0151MH-E

Fan tap	H	M	L
Sound pressure level (dB(A))	40	35	31

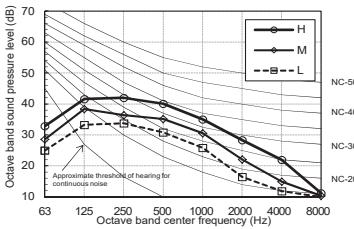

MMU-UP0181MH-E


Fan tap	H	M	L
Sound pressure level (dB(A))	47	39	34

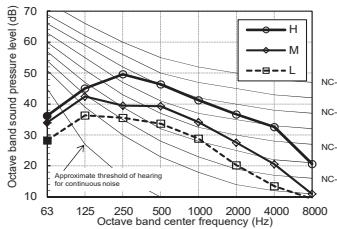


Air diffusion

Unit : m/s


MMU-UP0071MH-E

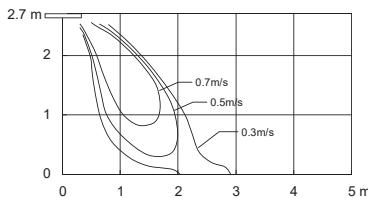


MMU-UP0091MH-E

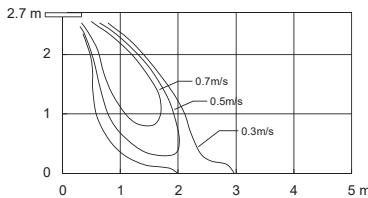


MMU-UP0121MH-E

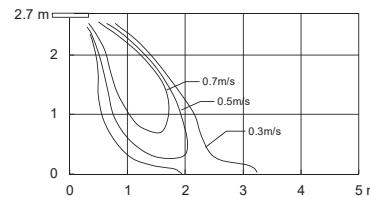

MMU-UP0151MH-E

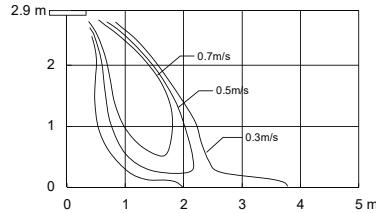


MMU-UP0181MH-E

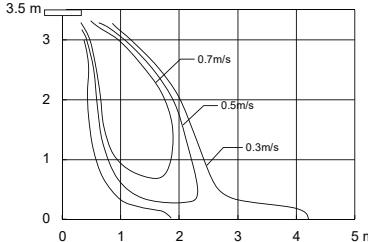

Accessories

No.	Part name	Model name	Applied model	Notes
1	Ceiling panel	RBC-UM21PG(W)-E	MMU-UP_1MH-E	Required accessory
2	Auxiliary fresh air flange	TCB-FF101URE2		For easy fresh air intake by using the knockout hole of indoor unit (dia=100 mm)
3	Wireless remote controller	RBC-AXU31UM-E		For Installing on panel
4	Wireless remote controller	RBC-AXU31-E		For installing as stand alone
5	Occupancy sensor	TCB-SIR41UM-E		

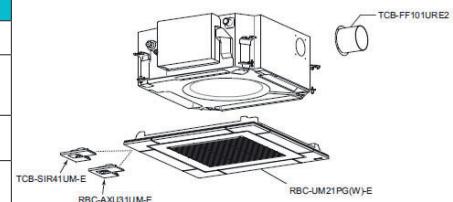

Compact 4-way cassette connectors

*: Available


CN32	CN60	CN61	CN70	CN73	CN80
Additional ventilation control from remote control	Operation status signal output (Cooling, fan, thermo-on)	External On/Off, operation output and alarm output	Warning symbol on remote control based on signal input.	Forced IDU thermo-off based on signal input	Forced IDU thermo-off and IDU lock based on signal input
*	TCB-PCUC2E PCB needed	*	TCB-PCUC2E PCB needed	TCB-PCUC2E PCB needed	TCB-PCUC2E PCB needed

CASSETTE

MMU-UP_1WH-E 2-WAY CASSETTE



Slim, compact and lightweight, the 2-Way Cassette has been designed to fit easily and discreetly into any room interior.



LOCAL CONTROLS



RBC-AXU31UW-E
RBC-AXU31-E



RBC-ASCU11-E
RBC-AMTU31-E
RBC-AMSU51-EN/ES

Features

Model name	MMU-	UP0071WH-E	UP0091WH-E	UP0121WH-E	UP0151WH-E	UP0181WH-E	UP0241WH-E	UP0271WH-E	UP0301WH-E	UP0361WH-E	UP0481WH-E	UP0561WH-E							
Cooling capacity	kW	2.2	2.8	3.6	4.5	5.6	7.1	8.0	9.0	11.2	14.0	16.0							
	BTU(*1.1)	7,500	9,600	12,300	15,400	19,100	24,200	27,300	30,700	38,200	47,800	54,600							
	BTU(*1.2)	7,600	9,700	12,400	15,600	19,300	24,500	27,600	31,000	38,600	48,400	55,300							
Electrical characteristics	Power supply	1-phase 230V (220-240V) 50Hz / 1-phase 220V (208-230V) 60Hz																	
	Running current (50Hz/60Hz)	A	0.21/0.22		0.21/0.22	0.28/0.29	0.37/0.39	0.43/0.46	0.50/0.53	0.57/0.59	0.77/0.81								
	Power consumption (50Hz/60Hz)	kW	0.024/0.024		0.026/0.026	0.034/0.034	0.045/0.045	0.055/0.055	0.081/0.081	0.091/0.091	0.131/0.131								
	Starting current (50Hz/60Hz)	A	0.31/0.32		0.33/0.35	0.42/0.44	0.57/0.60	0.65/0.68	0.76/0.79	0.85/0.89	1.17/1.22								
Appearance	Main unit	Heat-insulating material attached - Zinc hot dipping steel plate																	
	Ceiling panel name	RBC-UW283PG(W)-E			RBC-UW803PG(W)-E			RBC-UW1403PG(W)-E											
	Panel color	Moon white_(Munsell 2.5GY9.0/0.5)																	
Outer dimensions	Main unit (HxWxD)	mm	295x815x570			345x1180x570			345x1600x570										
	Ceiling panel (HxWxD)	mm	20x1050x680			20x1415x680			20x1835x680										
Total weight	Main unit	kg	18			26			35										
	Ceiling panel	kg	10			14			14										
Soundproof / Heat-insulating material	Non-flammable insulation																		
Fan unit	Fan	Turbo fan				Centrifugal fan													
	Standard air flow (H/M/L)	m³/h	558/498/450		600/534/450	900/750/618	1050/840/738		1260/900/780	1740/1434/1182	1800/1482/1230	2040/1578/1320							
	Motor output	W	60			94			139										
Sound pressure level (H/M/L)	dB(A)	34/32/30		35/33/30		38/35/33	40/37/34	42/39/36	43/40/37	46/42/39									
Sound power level	dB(A)	49		50		53	55	57	58	61									
Air filter	Standard filter supplied (Long life filter)																		
Connecting pipe	Gas side	mm	9.5	9.5	9.5	12.7	12.7	15.9	15.9	15.9	15.9	15.9							
	Liquid side	mm	6.4	6.4	6.4	6.4	6.4	9.5	9.5	9.5	9.5	9.5							
	Drain port (nominal dia)	mm	25 (Polyvinyl chloride tube)																

Notes : 1) The cooling capacities are measured under the conditions specified by JIS B 8615 based on the reference piping


The reference piping consists of 5 m of main piping and 2.5 m of branch piping connected with 0 m height

(*1.1) Indoor air temperature 27.0 °C DB/ 19.0 °C WB, outdoor air temperature 35.0 °C DB


(*1.2) Indoor air temperature 27.0 °C DB/ 19.5 °C WB, outdoor air temperature 35.0 °C DB

Drawings


MMU-UP0071WH-E to MMU-UP0151WH-E

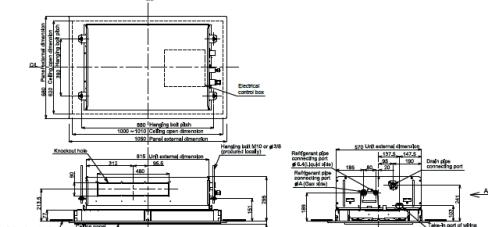

MMU-UP0181WH-E to MMU-UP0301WH-E

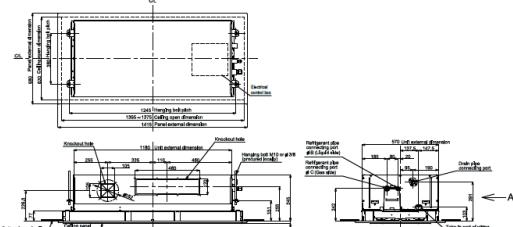


MMU-UP0361WH-E to MMU-UP0561WH-E

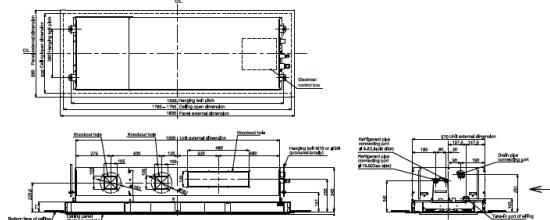


2-WAY CASSETTE

Sound pressure levels


MMU-UP0071, 0091, 0121WH-E




MMU-UP0151WH-E




MMU-UP0181WH-E




MMU-UP0241, 0271WH-E




MMU-UP0301WH-E




MMU-UP0361WH-E

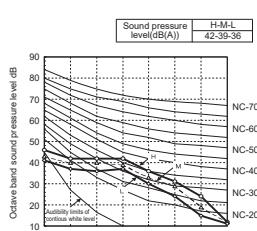

MMU-UP0481WH-E




MMU-UP0561WH-E




Air diffusion

Unit : m/s


MMU-UP0071, 0091, 0121, 0151WH-E

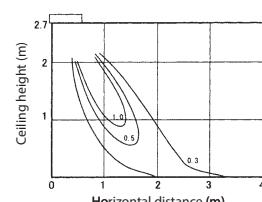


MMU-UP0181WH-E

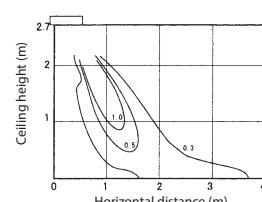


MMU-UP0241, 0271WH-E

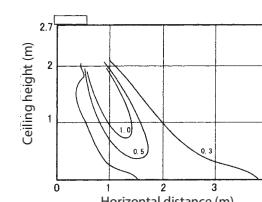


MMU-UP0301WH-E



MMU-UP0361, 0481WH-E

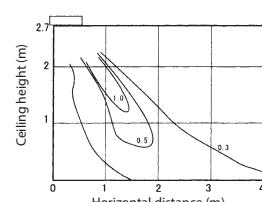


MMU-UP0561WH-E

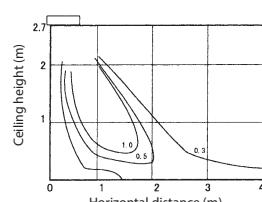

Accessories

No.	Part name	Model name	Applied model	Notes	Remarks
1	Ceiling Panel	RBC-UW283PG(W)-E	MMU-UP0071 to 0151WH-E	Required accessory	
2	Ceiling Panel	RBC-UW803PG(W)-E	MMU-UP0181 to 0301WH-E		
3	Ceiling Panel	RBC-UW1403PG(W)-E	MMU-UP0361 to 0561WH-E		
4	Super long life filter	TBC-LF283UW-E	MMU-UP0071 to 0151WH-E	Dust collecting effect: 50% (Weight method)	Use with TBC-FC283UW-E
5	Super long life filter	TBC-LF803UW-E	MMU-UP0181 to 0301WH-E		Use with TBC-FC803UW-E
6	Super long life filter	TBC-LF1403UW-E	MMU-UP0361 to 0561WH-E		Use with TBC-FC1403UW-E
7	Filter chamber	TBC-FC283UW-E	MMU-UP0071 to 0151WH-E	For super long life filter	
8	Filter chamber	TBC-FC803UW-E	MMU-UP0181 to 0301WH-E		
9	Filter chamber	TBC-FC1403UW-E	MMU-UP0361 to 0561WH-E		
10	Auxiliary fresh air flange	TBC-FF151US-E	MMU-UP0071 to 0561WH-E	For fresh air intake by using the knockout hole of indoor unit.	
11	Wireless remote controller	RBC-AXU31-E	MMU-UP_1WH-E		

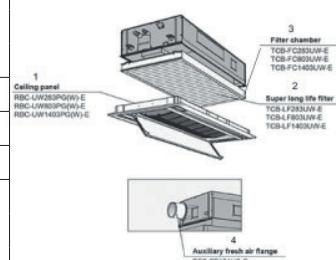

2-way cassette connectors


*: Available

CN32	CN60	CN61	CN70	CN73	CN80
Additional ventilation control from remote control	Operation status signal output (Cooling, fan, thermo-on)	External On/Off, operation output and alarm output	Warning symbol on remote control based on signal input.	Forced IDU thermo-off based on signal input	Forced IDU thermo-off and IDU lock based on signal input
*	*	*	*	*	*

CASSETTE

MMU-UP_1YHP-T 1-WAY CASSETTE

>NEW

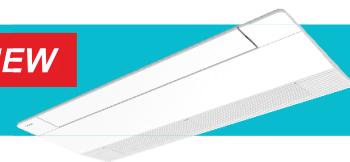

Toshiba's innovative slim-line 1-Way Cassette is simple to install and suitable for small areas, such as hotels, offices and lobby.

CAPACITY



SOUND PRESSURE LEVEL



0.8 HP ~ 3.0 HP

25 dB(A)

LOCAL CONTROLS



RBC-AX33UYP-E



RBC-ASCU11-E
RBC-AMTU31-E
RBC-AMSU51-EN/ES

Features

Model name	MMU-	UP0071YHP-T	UP0091YHP-T	UP0121YHP-T	UP0151YHP-T	UP0181YHP-T	UP0241YHP-T	UP0271YHP-T						
Cooling capacity	kW	2.2	2.8	3.6	4.5	5.6	7.1	8.0						
	BTU(*1.1)	7,500	9,600	12,300	15,400	19,100	24,200	27,300						
	BTU(*1.2)	7,600	9,700	12,400	15,600	19,300	24,500	27,600						
Electrical characteristics	Power supply	1-phase 230V (220-240V) 50Hz / 1-phase 220V (208-230V) 60Hz												
	Running current (50Hz/60Hz)	A	0.17/0.18	0.18/0.19	0.19/0.20	0.24/0.25	0.26/0.27	0.34/0.36						
	Power consumption (50Hz/60Hz)	kW	0.017/0.017	0.018/0.018	0.019/0.019	0.025/0.025	0.027/0.027	0.042/0.042						
	Starting current (50Hz/60Hz)	A	0.43/0.43	0.43/0.43	0.43/0.43	0.28/0.28	0.30/0.30	0.38/0.38						
Appearance	Main unit	Heat-insulating material attached - Zinc hot dipping steel plate												
	Ceiling panel name	RBC-UY32P-T			RBC-UY42P-T									
	Panel color	Moon white_(Munsell 2.5GY9.0/0.5)												
Outer dimensions	Main unit (HxWxD)	mm	150x990x450		150x1180x450									
	Ceiling panel (HxWxD)	mm	30x1220x530		30x1410x530									
Total weight	Main unit	kg	14		15		16							
	Ceiling panel	kg	4		5									
Soundproof / Heat-insulating material	Non-flammable insulation													
Fan unit	Fan	Centrifugal fan												
	Standard air flow (H/M/L)	m ³ /h	500/390/270	520/410/290	540/420/290	750/630/500	800/650/500	940/760/600						
	Motor output	W	30		42		59							
Sound pressure level (H/M/L)	dB(A)	38/34/25	39/35/26	40/36/26	39/36/33	40/37/33	46/42/37	47/44/41						
Sound power level	dB(A)	53	54	55										
Air filter	Standard filter supplied (Long life filter) / Air purifier available as option													
Connecting pipe	Gas side	mm	9.5	9.5	9.5	12.7	12.7	15.9						
	Liquid side	mm	6.4	6.4	6.4	6.4	6.4	9.5						
	Drain port (nominal dia)	mm	25 (Polyvinyl chloride tube)											

Notes : 1) The cooling capacities are measured under the conditions specified by JIS B 8615 based on the reference piping.

The reference piping consists of 5 m of main piping and 2.5 m of branch piping connected with 0 m height.


(*1.1) Indoor air temperature 27.0 °C DB/ 19.0 °C WB, outdoor air temperature 35.0 °C DB

(*1.2) Indoor air temperature 27.0 °C DB/ 19.5 °C WB, outdoor air temperature 35.0 °C DB


Drawings

Unit : mm

MMU-UP0071YHP-T to MMU-UP0121YHP-T

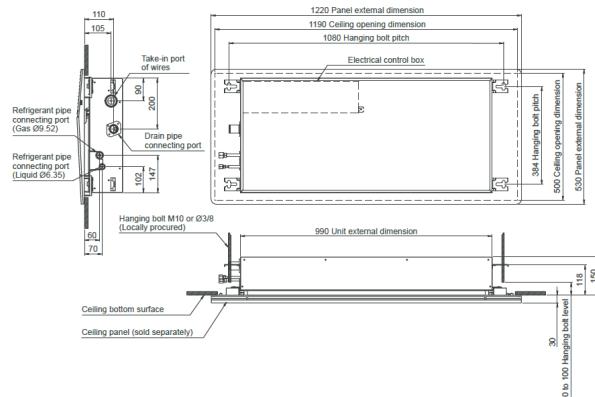


MMU-UP0151YHP-T to MMU-UP0271YHP-T

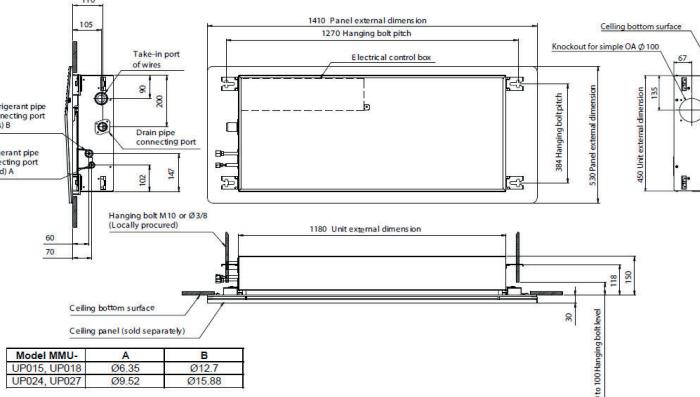

1-WAY CASSETTE


Sound pressure levels

Unit : dB(A)

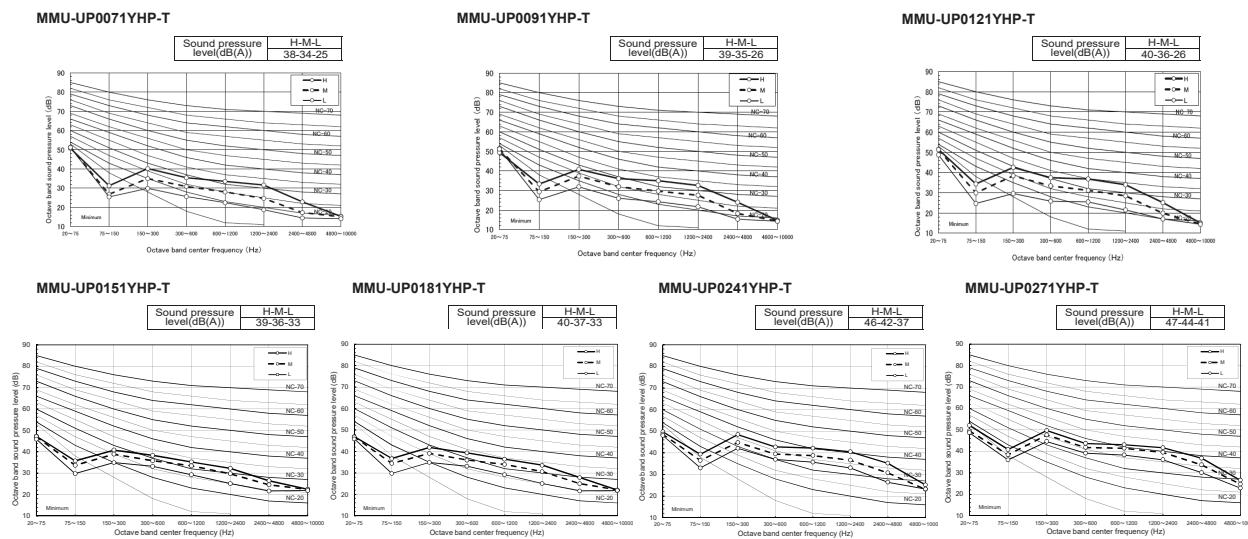

Air diffusion

Unit : m/s

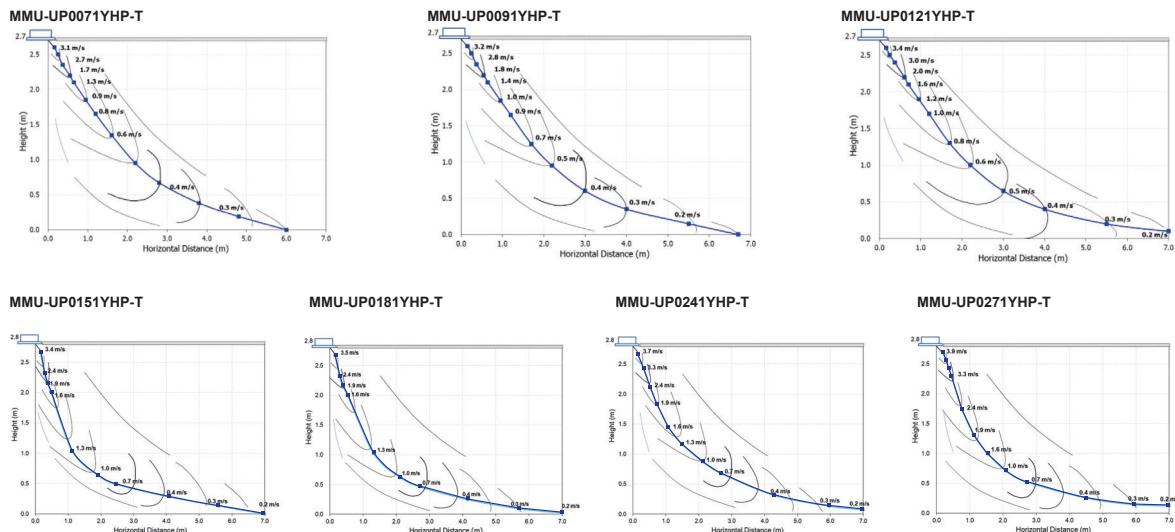

Accessories

No.	Part name	Model name	Applied model	Notes	Remarks
1	Ceiling Panel	RBC-UY32P-T	MMU-UP0071 to 0121YHP-T	Required accessory	
2	Ceiling Panel	RBC-UY42P-T	MMU-UP0151 to 0271YHP-T	Required accessory	
3	Auxiliary fresh air flange	TCB-FF101URE2	MMU-UP0151 to 0271YHP-T	For easy fresh air intake by using the knockout hole of indoor unit. (dia.=100mm)	
4	Air purifier kit	TCB-EAPC1UYHP-E	MMU-UP_1YHP-T		
5	Occupancy sensor	TCB-SIR41UYP-E			
6	Wireless remote controller	RBC-AX33UYP-E		For Installing on panel	
7	Wireless remote controller	RBC-AXU31-E		For installing as stand alone	

1-way cassette connectors

• : Available

CN32	CN60	CN61	CN70	CN73	CN80
Additional ventilation control from remote control	Operation status signal output (Cooling, fan, thermo-on)	External On/Off, operation output and alarm output	Warning symbol on remote control based on signal input.	Forced IDU thermo-off based on signal input	Forced IDU thermo-off and IDU lock based on signal input
•	TCB-PCUC2E PCB needed	•	TCB-PCUC2E PCB needed	TCB-PCUC2E PCB needed	TCB-PCUC2E PCB needed

MMD-UP_1SPHY-E

SLIM DUCT



Design for installation in a ceiling void or in a false ceiling, Toshiba Slim Duct offers the ultimate technology, with exceptional energy saving, high performance and easy installation.

CAPACITY



0.8 HP ~ 3 HP

SOUND PRESSURE LEVEL



26 dB(A)

LOCAL CONTROLS



RBC-AXU31-E


 RBC-AMTU31-E
 RBC-AMSU51-EN/ES

Features

Model name	MMD-	UP0071SPHY-E	UP0091SPHY-E	UP0121SPHY-E	UP0151SPHY-E	UP0181SPHY-E	UP0241SPHY-E	UP0271SPHY-E
Cooling capacity	kW	2.2	2.8	3.6	4.5	5.6	7.1	8.0
	BTU(*1.1)	7,500	9,600	12,300	15,400	19,100	24,200	27,300
	BTU(*1.2)	7,600	9,700	12,400	15,600	19,300	24,500	27,600
Electrical characteristics	Power supply			1-phase 50Hz 220-240V / 1-phase 60Hz 208-230V				
	Running current (50Hz/60Hz)	A	0.40/0.42	0.42/0.44	0.44/0.46	0.47/0.49	0.53/0.56	0.69/0.73
	Power consumption (50Hz/60Hz)	kW	0.026/0.026	0.029/0.029	0.031/0.031	0.035/0.035	0.044/0.044	0.067/0.067
	Starting current (50Hz/60Hz)	A	0.69/0.73	0.73/0.77	0.77/0.81	0.82/0.86	0.92/0.97	1.21/1.27
Appearance				Zinc hot dipping steel plate				
Outer dimensions	(HxWxD) mm		210x700x450		210x900x450		210x1110x450	
Total weight	kg		15		19		22	
Soundproof / Heat-insulating material				Polyethylene foam + Polyurethane foam				
	Fan			Centrifugal fan (sirocco fan)				
	Standard air flow (H/M/L) m ³ /h	540/460/400	570/500/420	600/520/440	690/640/550	780/730/650	1080/950/860	1140/980/910
Fan unit	Motor output W		50			94		
	External static pressure (Factory setting) Pa				10			
	External static pressure Pa				10-20-30-40-50 (5 Steps)			
Sound pressure level (H/M/L)	Under air intake dB(A)	41/39/35	42/40/36	44/40/37	42/39/37	44/42/39	47/44/41	48/45/43
	Back air intake dB(A)	31/29/26	32/29/26	33/30/27	33/30/28	34/32/29	36/33/30	37/34/32
Sound power level	dB(A)	52	54	54	52	56	60	61
Air filter				Standard filter supplied (Long life filter)				
	Gas side mm	9.5	9.5	9.5	12.7	12.7	15.9	15.9
Connecting pipe	Liquid side mm	6.4	6.4	6.4	6.4	6.4	9.5	9.5
	Drain port (nominal dia) mm			25 (Polyvinyl chloride tube : External dia.32 Internal dia.25)				


Notes : 1) The cooling capacities are measured under the conditions specified by JIS B 8615 based on the reference piping

The reference piping consists of 5 m of main piping and 2.5 m of branch piping connected with 0 m height


(*1.1) Indoor air temperature 27.0 °C DB/ 19.0 °C WB, outdoor air temperature 35.0 °C DB

(*1.2) Indoor air temperature 27.0 °C DB/ 19.5 °C WB, outdoor air temperature 35.0 °C DB

Drawings

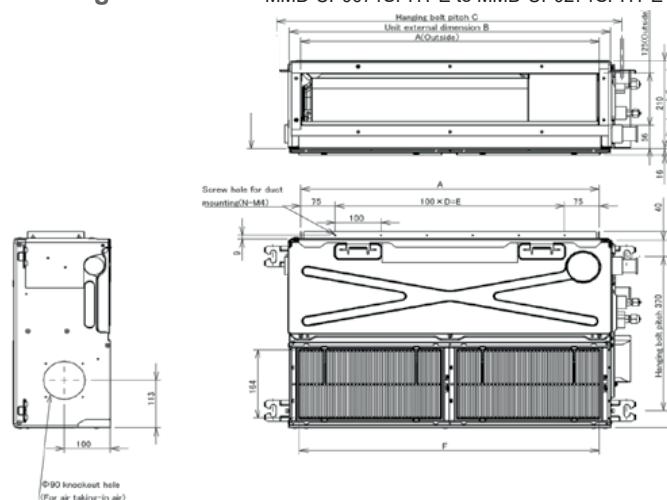


MMD-UP***1SPHY-E	007-012	015-018	024-027
A	650	850	1050
B	700	900	1100
C	770	970	1170
D	5	7	9
E	500	700	900
F	655	855	1055
G		6.4	9.5
H	9.5	12.7	15.9

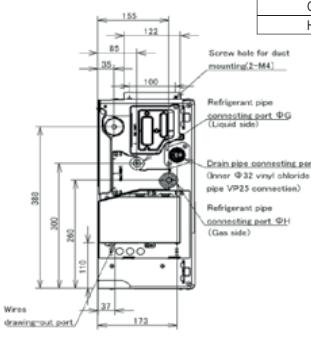

SLIM DUCT

Sound pressure levels

Unit : dB(A)

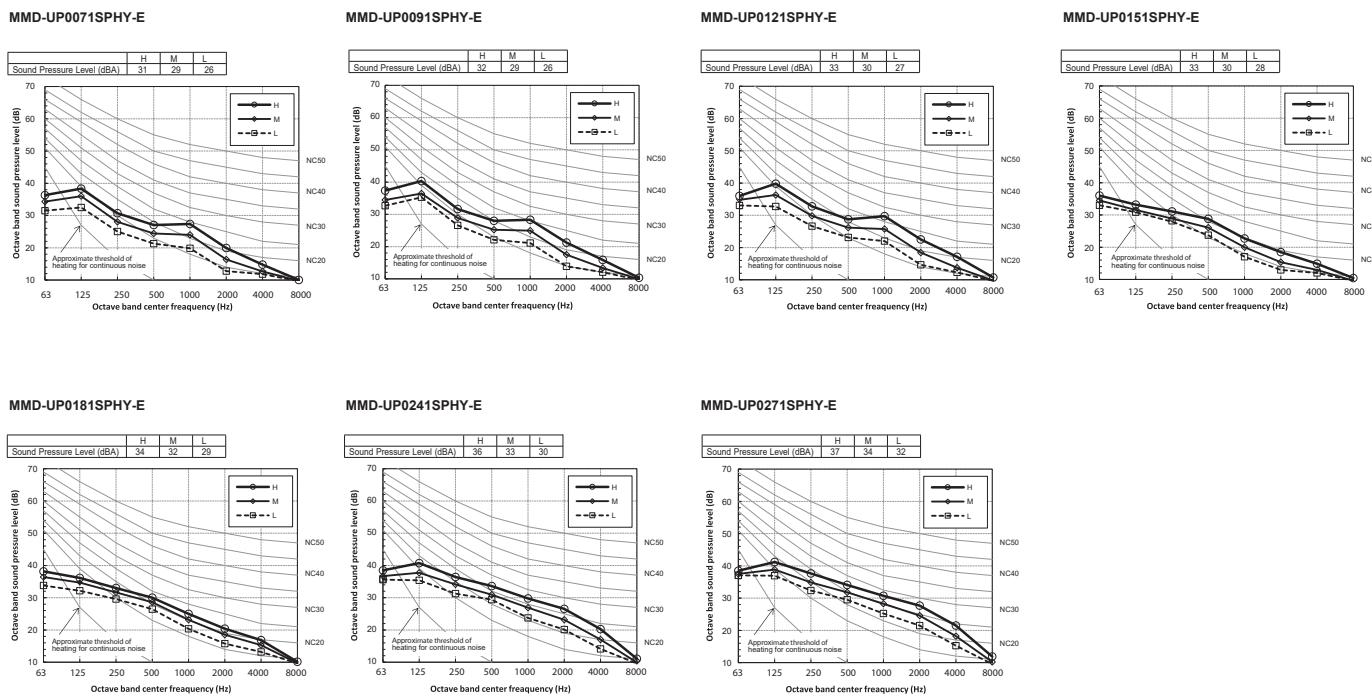

Accessories

No.	Part name	Model name	Applied model	Notes
1	Auxiliary fresh air flange	TCB-FF101URE2	MMD-UP_1SPHY-E	For fresh air intake by using the knockout hole of indoor unit (dia.=100 mm)
2	Wireless remote controller	RBC-AXU31-E		For installing as stand alone

Slim duct connectors


*: Available

CN32	CN60	CN61	CN70	CN73	CN80
Additional ventilation control from remote control	Operation status signal output (Cooling, fan, thermo-on)	External On/Off, operation output and alarm output	Warning symbol on remote control based on signal input.	Forced IDU thermo-off based on signal input	Forced IDU thermo-off and IDU lock based on signal input
*	TCB-PCUC2E PCB needed	*	TCB-PCUC2E PCB needed	TCB-PCUC2E PCB needed	TCB-PCUC2E PCB needed


Installation flexibility

Change from under air intake to back air intake

Under air intake

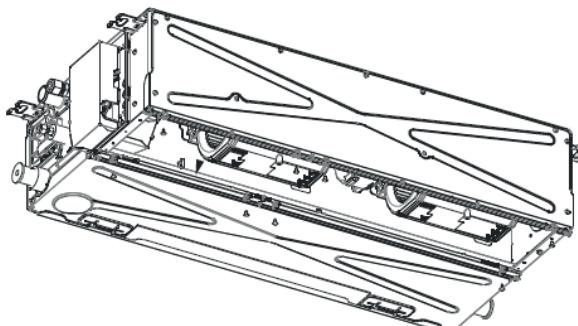

Back air intake

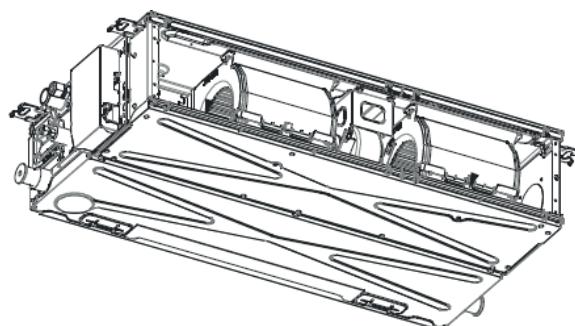

MMD-UP_1BHP-T

CONCEALED DUCT



Whatever the shape of the room, this flexible model ensures a uniform temperature and optimal air distribution for end user comfort.

CAPACITY



0.8 HP ~ 6 HP

SOUND PRESSURE LEVEL



23 dB(A)

LOCAL CONTROLS



RBC-AXU31-E


 RBC-ASCU11-E
 RBC-AMTU31-E
 RBC-AMSU51-EN/ES

Features

Model name	MMD-	UP0071BHP-T	UP0091BHP-T	UP0121BHP-T	UP0151BHP-T	UP0181BHP-T	UP0241BHP-T	UP0271BHP-T	UP0301BHP-T	UP0361BHP-T	UP0481BHP-T	UP0561BHP-T							
Cooling capacity	kW	2.2	2.8	3.6	4.5	5.6	7.1	8.0	9.0	11.2	14.0	16.0							
	BTU(*1.1)	7,500	9,600	12,300	15,400	19,100	24,200	27,300	30,700	38,200	47,800	54,600							
	BTU(*1.2)	7,600	9,700	12,400	15,600	19,300	24,500	27,600	31,000	38,600	48,400	55,300							
Electrical characteristics	Power supply	1-phase 50Hz 220-240V / 1-phase 60Hz 208-230V																	
	Running current (50Hz/60Hz)	A	0.35/0.36	0.38/0.40		0.70/0.72		0.80/0.83	0.95/0.98	1.29/1.33	1.70/1.70								
	Power consumption (50Hz/60Hz)	kW	0.055/0.055	0.060/0.060		0.110/0.110		0.135/0.135	0.160/0.160	0.220/0.220	0.290/0.290								
	Starting current (50Hz/60Hz)	A	0.55/0.56	0.58/0.60		1.10/1.12		1.20/1.23	1.35/1.38	2.09/2.13	2.50/2.56								
Appearance	Zinc hot dipping steel plate																		
Dimensions (HxWxD)	mm	275x700x750				275x1000x750				275x1400x750									
Total weight	kg	23				30				40									
Soundproof / Heat-insulating material	Polyethylene foam																		
Fan unit	Fan	Centrifugal fan																	
	Standard air flow (H/M/L)	m³/h	540/450/360	570/480/390	920/660/540	1320/1090/870	1450/1200/960	1920/1620/1380	2350/1920/1500	2350/1090/1500									
	Motor output	W	150								250								
	External static pressure (Factory setting)	Pa	30				40				50								
	External static pressure	Pa	30-40-50-65-80-100-150 (7 Steps)																
Sound pressure level (H/M/L)	dB(A)	29/26/23	30/26/23	30/26/23	33/29/25	33/29/25	33/30/27	33/30/27	36/31/27	36/34/31	40/36/33	40/36/33							
Sound power level	dB(A)	44	45	45	48	48	48	48	51	51	55	55							
Air filter	Standard filter supplied (Long life filter)																		
Connecting pipe	Gas side	mm	9.5	9.5	9.5	12.7	12.7	15.9	15.9	15.9	15.9	15.9							
	Liquid side	mm	6.4	6.4	6.4	6.4	6.4	9.5	9.5	9.5	9.5	9.5							
	Drain port (nominal dia)	mm	25 (Polyvinyl chloride tube)																

Notes : 1) The cooling capacities are measured under the conditions specified by JIS B 8615 based on the reference piping

The reference piping consists of 5 m of main piping and 2.5 m of branch piping connected with 0 m height


(*1.1) Indoor air temperature 27.0 °C DB/ 19.0 °C WB, outdoor air temperature 35.0 °C DB

(*1.2) Indoor air temperature 27.0 °C DB/ 19.5 °C WB, outdoor air temperature 35.0 °C DB


Drawings

Unit : mm


MMD-UP0071BHP-T to MMD-UP0181BHP-T

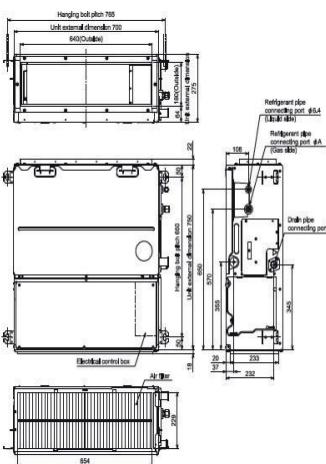

MMD-UP0241BHP-T to MMD-UP0301BHP-T

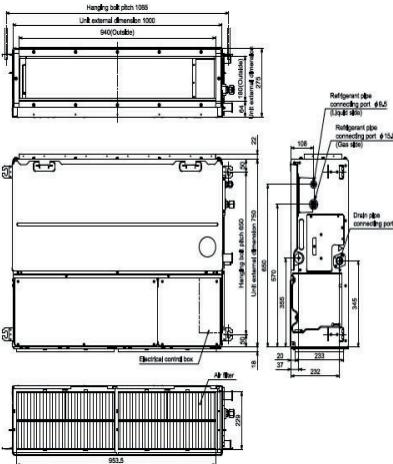

MMD-UP0361BHP-T to MMD-UP0561BHP-T

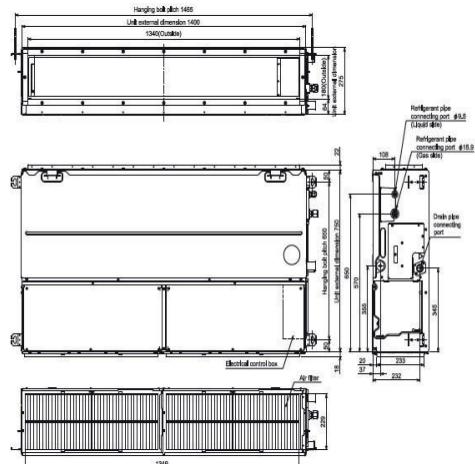


CONCEALED DUCT

Sound pressure levels

Unit : dB(A)


MMD-UP0071BHP-T

External static pressure 80 Pa			
FAN tap	H	M	L
Sound pressure level (dB(A))	33	30	27

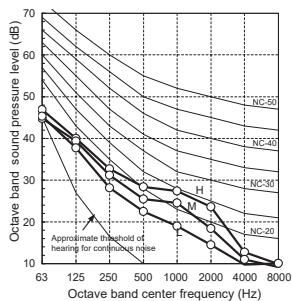


MMD-UP0301BHP-T

External static pressure 80 Pa			
FAN tap	H	M	L
Sound pressure level (dB(A))	42	39	33

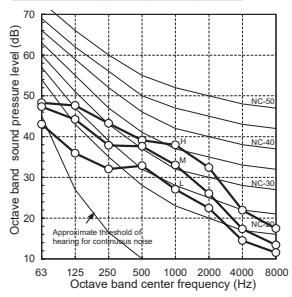


MMD-UP0091, 0121BHP-T

External static pressure 80 Pa			
FAN tap	H	M	L
Sound pressure level (dB(A))	34	30	28

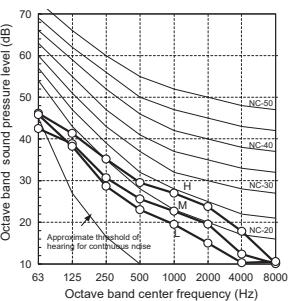


MMD-UP0151, 0181BHP-T

External static pressure 80 Pa			
FAN tap	H	M	L
Sound pressure level (dB(A))	37	33	31

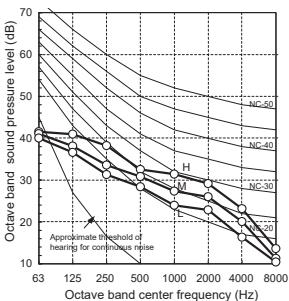


MMD-UP0241, 0271BHP-T

External static pressure 80 Pa			
FAN tap	H	M	L
Sound pressure level (dB(A))	42	38	33

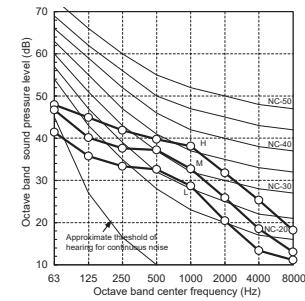


MMD-UP0361BHP-T

External static pressure 80 Pa			
FAN tap	H	M	L
Sound pressure level (dB(A))	41	39	35

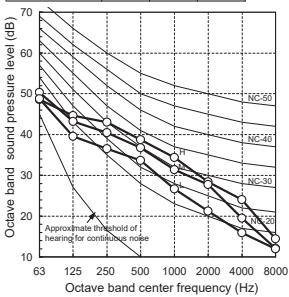

MMD-UP0481, 0561BHP-T

External static pressure 80 Pa			
FAN tap	H	M	L
Sound pressure level (dB(A))	41	40	36

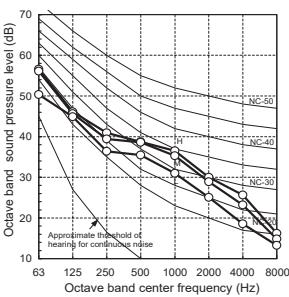

Accessories

No.	Part name	Model name	Applied model	Appearance	Notes
1	Spigot shaped flange	TCB-SF56C6BE	MMD-UP0071 to 0181BHP-T		263x694x175mm / Spigot diameter 200mm
2	Spigot shaped flange	TCB-SF80C6BE	MMD-UP0241 to 0301BHP-T		263x994x175mm / Spigot diameter 200mm
3	Spigot shaped flange	TCB-SF160C6BE	MMD-UP0361 to 0561BHP-T		263x1394x175mm / Spigot diameter 200mm
4	Wireless remote controller	RBC-AXU31-E	MMD-UP_1BHP-T		For installing as stand alone


Concealed duct connectors

*: Available

CN32	CN60	CN61	CN70	CN73	CN80
Additional ventilation control from remote control	Operation status signal output (Cooling, fan, thermo-on)	External On/Off, operation output and alarm output	Warning symbol on remote control based on signal input.	Forced IDU thermo-off based on signal input	Forced IDU thermo-off and IDU lock based on signal input
•	•	•	•	•	•

Installation flexibility

Changing from back air intake to under air intake

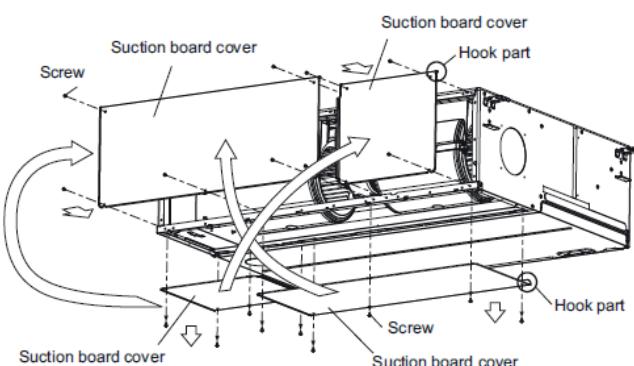

MMD-UP_1HP-T

CONCEALED DUCT HIGH STATIC PRESSURE



This is Toshiba's most powerful ducted unit delivering air flows up to 4,800 m³/h with an external static pressure of up to 250 Pa.



2 HP ~ 10 HP

31 dB(A)

LOCAL CONTROLS



RBC-AXU31-E

RBC-ASCU11-E
RBC-AMTU31-E
RBC-AMSU51-EN/ES

Features

Model name	MMD-	UP0181HP-T	UP0241HP-T	UP0271HP-T	UP0361HP-T	UP0481HP-T	UP0561HP-T	UP0721HP-T	UP0961HP-T	
Cooling capacity	kW	5.6	7.1	8.0	11.2	14.0	16.0	22.4	28.0	
	BTU(*1.1)	19,100	24,200	27,300	38,200	47,800	54,600	76,400	95,500	
	BTU(*1.2)	19,300	24,500	27,600	38,600	48,400	55,300	77,300	96,700	
Electrical characteristics	Power supply				1-phase 50Hz 220-240V / 1-phase 60Hz 208-230V					
	Running current (50Hz/60Hz)	A	0.82/0.85	0.92/0.95	1.16/1.20	1.39/1.43	1.81/1.86	2.48/2.57	2.83/2.93	3.77/3.92
	Power consumption (50Hz/60Hz)	kW	0.125/0.125	0.140/0.140	0.190/0.190	0.230/0.230	0.300/0.300	0.400/0.400	0.540/0.540	0.790/0.790
	Starting current (50Hz/60Hz)	A	1.12/1.15	1.22/1.25	1.46/1.50	1.89/1.93	2.41/2.46	3.08/3.17	7.80/8.15	7.80/8.15
Appearance					Zinc hot dipping steel plate					
Dimensions (HxWxD)	mm		298x1000x750			298x1400x750		448x1400x900		
Total weight	kg		34			43		97		
Soundproof / Heat-insulating material					Polyethylene foam					
Fan unit	Fan				Centrifugal fan					
	Standard air flow (H/M/L)	m ³ /h	1100/990/900	1200/1050/960	1500/1350/1200	1920/1560/1340	2340/1980/1695	2760/2340/1920	3800/3200/2500	4800/4200/3500
	Motor output	W		250		350			250	
	External static pressure (Factory setting)	Pa			100				150	
	External static pressure	Pa			50-75-125-100-150-175-200 (7steps)			50-83-117-150-183-217-250 (7steps)		
Sound pressure level (H/M/L)	dB(A)	37/33/31	38/34/31	43/41/38	41/37/34	44/44/38	46/44/41	44/40/36	46/42/38	
Sound power level	dB(A)		60		62	67	69	79	81	
Air filter			Sold separately (TCB-LK801D-E)		Sold separately (TCB-LK1401D-E)		Sold separately (TCB-LK2801DP-E)			
Connecting pipe	Gas side	mm	12.7	15.9	15.9	15.9	15.9	22.2	22.2	
	Liquid side	mm	6.4	9.5	9.5	9.5	9.5	12.7	12.7	
	Drain port (nominal dia)	mm			25 (Polyvinyl chloride tube)					

Notes : 1) The cooling capacities are measured under the conditions specified by JIS B 8615 based on the reference piping

The reference piping consists of 5 m of main piping and 2.5 m of branch piping connected with 0 m height


(*1.1) Indoor air temperature 27.0 °C DB/ 19.0 °C WB, outdoor air temperature 35.0 °C DB

(*1.2) Indoor air temperature 27.0 °C DB/ 19.5 °C WB, outdoor air temperature 35.0 °C DB

Drawings

Unit : mm


MMD-UP0181HP-T to MMD-UP0561HP-T

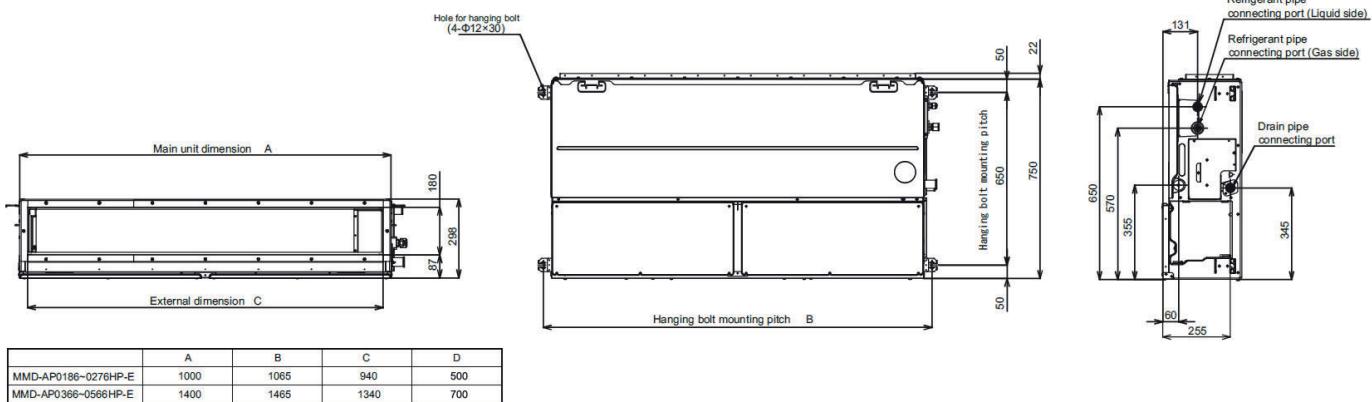


CONCEALED DUCT HIGH STATIC PRESSURE

Drawings

MMD-UP0721HP-T & MMD-UP0961HP-T

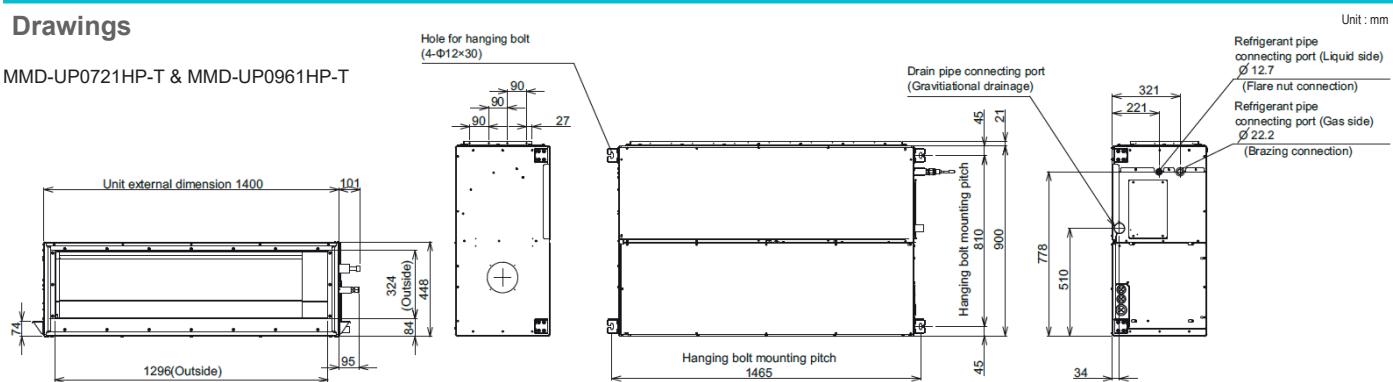

Sound pressure levels

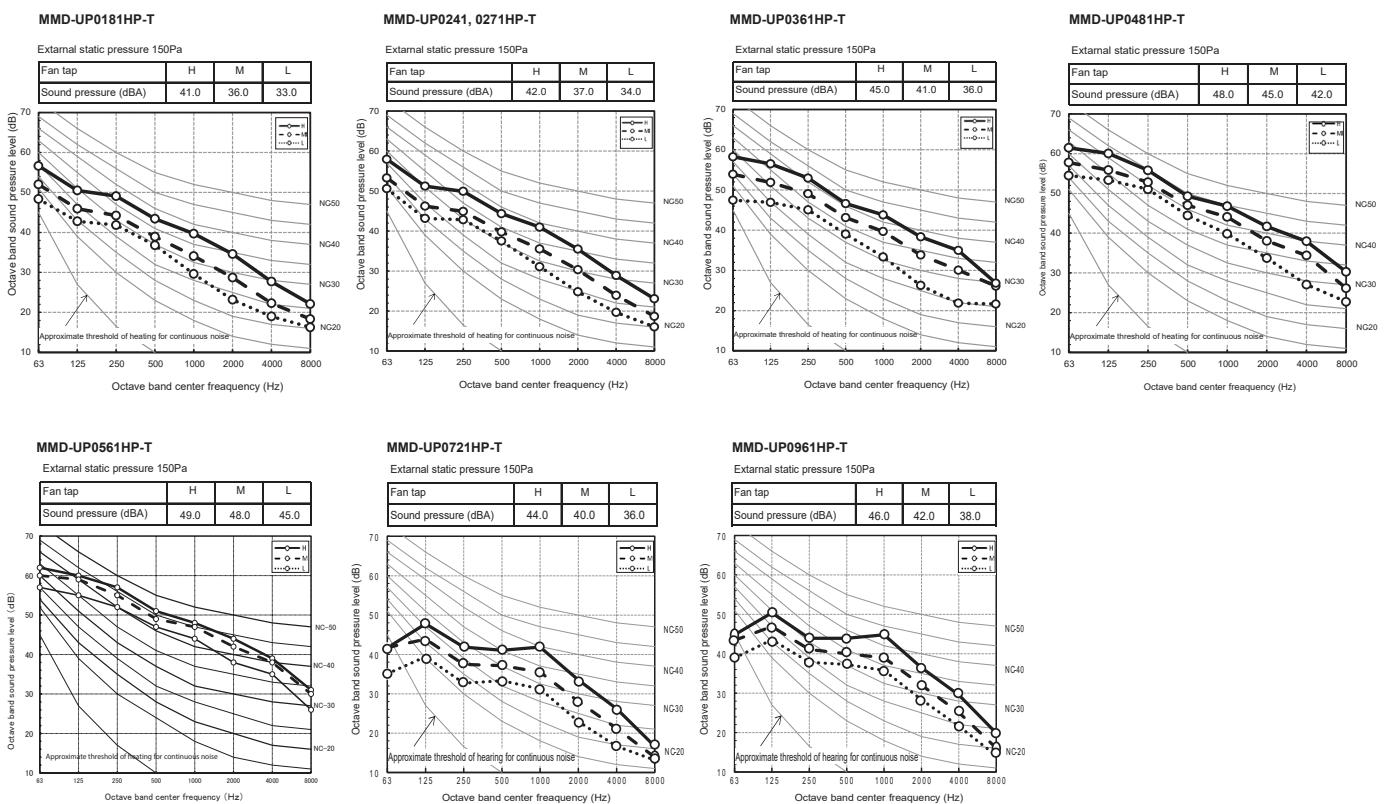

Accessories

No.	Part name	Model name	Applied model	Appearance	Notes
1	Spigot shaped flange	TCB-SF80C6BE	MMD-UP0181 to 0271HP-T		263x994x175mm / Spigot diameter 200mm
2	Spigot shaped flange	TCB-SF160C6BE	MMD-UP0361 to 0561HP-T		263x1394x175mm / Spigot diameter 200mm
3	Long life filter kit	TCB-LK801D-E	MMD-UP0181 to 0271HP-T		Flange shaped
4	Long life filter kit	TCB-LK1401D-E	MMD-UP0361 to 0561HP-T		Mount chassis directly
5	Long life filter kit	TCB-LK2801DP-E	MMD-UP0721 to 0961HP-T		Upside down mounting possible
6	Auxiliary fresh air flange	TCB-FF151US-E	MMD-UP0181 to 0561HP-T		Left and right removable
7	Drain pump kit	TCB-DP40DPE	MMD-UP0721 to 0961HP-T		
8	Wireless remote controller	RBC-AXU31-E	MMD-UP_1HP-T		For installing as stand alone

Concealed duct high static pressure connectors

*: Available

	CN32	CN60	CN61	CN70	CN73	CN80
	Additional ventilation control from remote control	Operation status signal output (Cooling, fan, thermo-on)	External On/Off, operation output and alarm output	Warning symbol on remote control based on signal input.	Forced IDU thermo-off based on signal input	Forced IDU thermo-off and IDU lock based on signal input
Up to 6HP	*	*	*	*	*	*
8 & 10HP	*	TCB-PCUC2E PCB needed	*	TCB-PCUC2E PCB needed	TCB-PCUC2E PCB needed	TCB-PCUC2E PCB needed

FRESH AIR INTAKE

MMD-UP_1HFP-T FRESH AIR INTAKE



This indoor unit has been specifically designed to manage and treat fresh air before its distribution into the building.



AIR FLOW
Up to 1,080m³/h ~ 3,060m³/h



SOUND PRESSURE LEVEL
31 dB(A)

LOCAL CONTROLS



RBC-AXU31-E



RBC-ASCU11-E
RBC-AMTU31-E
RBC-AMSU51-EN/ES

Features

Model name	MMD-	UP0481HFP-T	UP0721HFP-T	UP0961HFP-T	UP1121HFP-T	UP1281HFP-T
Cooling capacity (*) (Note 1)	kW	14.0	22.4	28.0	33.5	40.0
	BTU(*1.1)	47,800	76,400	95,500	114,300	136,400
Electrical characteristics	Power supply		1-phase 50Hz 220-240V / 1-phase 60Hz 208-230V			
	Running current (50Hz/60Hz)	A	0.77/0.80	0.86/0.90	1.07/1.12	1.30/1.36
	Power consumption (50Hz/60Hz)	kW	0.108/0.108	0.153/0.153	0.198/0.198	0.240/0.240
	Starting current (50Hz/60Hz)	A	2.01/2.10	7.80/8.15	7.80/8.15	7.80/8.15
Dimensions (HxWxD)	mm	327x1430x750		477x1430x900		
Total weight	kg	44		99		
Soundproof / Heat-insulating material			Non-flammable insulation			
Fan unit	Fan		Centrifugal fan			
	Standard air flow (H/M/L)	m ³ /h	1080/930/760	1680/1440/1200	2100/1800/1470	2520/2130/1770
	Motor output	W	350		1000	
	External static pressure (Factory setting)	Pa		100		
	External static pressure	Pa		50-75-100-125-150-175-200 (7 Steps)		
	Air flow limit	Lower limit m ³ /h	600	960	1320	1500
		Upper limit m ³ /h	1320	2040	2520	3060
Sound pressure level (H/M/L)	dB(A)	38/35/31	38/36/33	39/36/33	40/37/34	42/38/35
Air filter			Option or field supply			
Connecting pipe	Gas / Liquid side	mm	15.9 / 9.5	22.2 / 12.7	28.6 / 12.7	28.6 / 12.7
	Drain port (nominal dia)	mm		25 (Polyvinyl chloride tube)		

* The setting temperature is 13 - 25°C (standard IDU 18 - 30 °C).

Note 1 : Rated conditions

Cooling : Outdoor air temperature 33°C DB/28°C WB setting temperature 18°C


Note 2 : When supply air temperature is "setting temperature + 3°C" or less, Fresh Air Intake unit operates as FAN mode

Note 3 : When supply air temperature is "setting temperature -3°C" or over, Fresh Air Intake unit operates as FAN mode

Note 4 : 46-52°C is also available but temporary operable


Use conditions

- In "COOL" or "FAN" mode, if temperature of the outdoor/suction air is under 5°C, the operation stops automatically in order to protect the equipment.

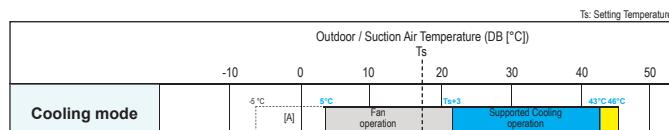


Drawings

MMD-UP0481HFP-T

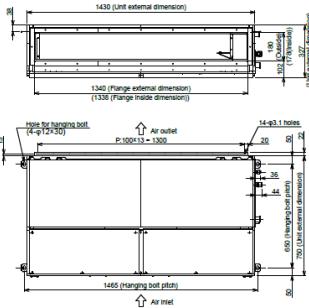

MMD-UP0721HFP-T to MMD-UP1281HFP-T


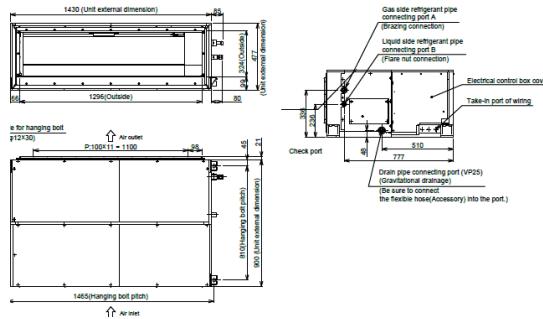


FRESH AIR INTAKE


Fresh air intake indoor unit type

System restriction	SMMS-7 Multi IDU connection	SMMS-7 All fresh air intake connection	SMMS ∞ Multi IDU connection	SMMS ∞ All fresh air intake connection
Max. no. of combined outdoor units	3	1	5	2
Max. capacity of combined outdoor units	60HP	24HP	120HP	52HP
Maximum number of connected indoor units	64	3	128	4
Total capacity of combined Indoor+fresh air unit	80 to 110%	100%		80 to 110%
Max. no. of combined Indoor units		3		4
Allowable length and height difference of refrigerant piping				
	Allowable value (m)			
	SMMS-7 Multi IDU connection	SMMS-7 All fresh air intake connection	SMMS ∞ Multi IDU connection	SMMS ∞ All fresh air intake connection
Pipe length	300/1000	300	500/1200	300
	Farthest piping length	Equivalent / Actual length m	235/190	150/130
	Main piping length	Equivalent / Actual length m	120/100	120/100
	Farthest equivalent piping length from the first branching section	Equivalent length m	90/65	30
	Maximum actual length of pipes connected to indoor units	Actual length m	30	30
	Maximum equivalent length between branching sections	Equivalent length m	50	50
Height difference	Height between outdoor and indoor units	Upper / Lower outdoor unit m	70/40	40/3
	Height between indoor units /fresh air intake units	m	0.5	0.5
			40	5

Sound pressure levels

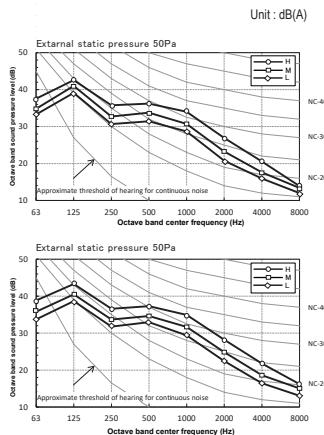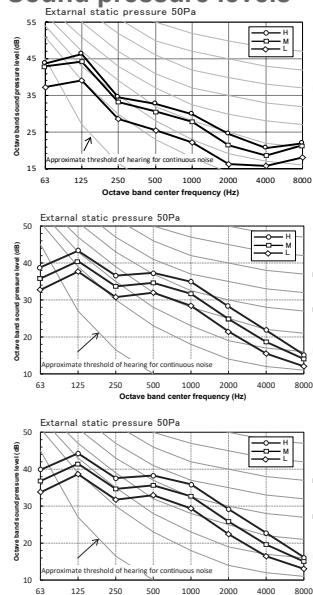


Other information

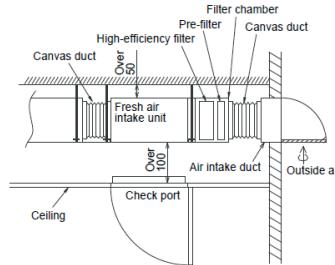

Accessories

No.	Part name	Model name	Applied model	Appearance	Notes
1	High-efficiency filter 65	TCB-UFM0481D-E	MMD-UP0481HFP-T		
2	High-efficiency filter 65	TCB-UFM1281D-E	MMD-UP0721 to 1281HFP-T		
3	High-efficiency filter 90	TCB-UFH0481D-E	MMD-UP0481HFP-T		
4	High-efficiency filter 90	TCB-UFH1281D-E	MMD-UP0721 to 1281HFP-T		
5	Stand alone long life prefilter	TCK-LK1401D-E	MMD-UP0481HFP-T		
6	Stand alone long life prefilter	TCK-LK2801DP-E	MMD-UP0721 to 1281HFP-T		
7	High efficiency long life prefilter	TCK-LK1401D-E (*2)	MMD-UP0481HFP-T		
8	High efficiency long life prefilter	TCK-PF1281DF-E	MMD-UP0721 to 1281HFP-T		
9	Filter chamber	TCB-FC0481DF-E	MMD-UP0481HFP-T		
10	Filter chamber	TCB-FC1281DF-E	MMD-UP0721 to 1281HFP-T		
11	Drain pump kit	TCB-DP40DFP-E	All models		
12	Wireless remote controller	RBC-AXU31-E	MMD-UP_1HFP-T		For installing as stand alone

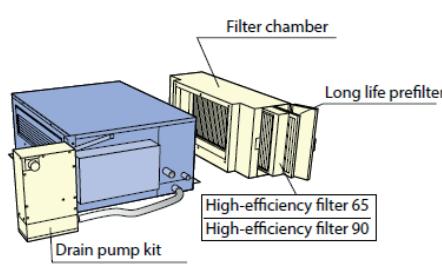

Fresh air intake connectors

* : Available

	CN32	CN60	CN61	CN70	CN73	CN80
	Additional ventilation control from remote control	Operation status signal output (Cooling, fan, thermo-on)	External On/Off, operation output and alarm output	Warning symbol on remote control based on signal input.	Forced IDU thermo-off based on signal input	Forced IDU thermo-off and IDU lock based on signal input
5HP	*	*	*	*	*	*
8 & 14HP	*	TCB-PCUC2E PCB needed	*	TCB-PCUC2E PCB needed	TCB-PCUC2E PCB needed	TCB-PCUC2E PCB needed

MMC-UP_1HP-T

CEILING



Simple, yet elegant design helps to create a pleasant and relaxing environment, quickly conditioning the room air to the desired temperature.

CAPACITY



1.7 HP ~ 6 HP

SOUND PRESSURE LEVEL



28 dB(A)

LOCAL CONTROLS

RBC-AXU31-E
RBC-AXU31C-ERBC-ASCU11-E
RBC-AMTU31-E
RBC-AMSU51-EN/ES

Features

Model name	MMC-	UP0151HP-T	UP0181HP-T	UP0241HP-T	UP0271HP-T	UP0361HP-T	UP0481HP-T	UP0561HP-T
Cooling capacity	kW	4.5	5.6	7.1	8.0	11.2	14.0	16.0
	BTU(*1.1)	15,400	19,100	24,200	27,300	38,200	47,800	54,600
	BTU(*1.2)	15,600	19,300	24,500	27,600	38,600	48,400	55,300
Electrical characteristics	Power supply			1 phase 50Hz 230V (220-240V) / 1 phase 60Hz 220V				
	Running current (50Hz/60Hz)	A	0.35/0.37	0.36/0.38	0.64/0.67	0.65/0.67	0.77/0.80	0.77/0.80
	Power consumption (50Hz/60Hz)	kW	0.033/0.033	0.034/0.034	0.067/0.067	0.067/0.067	0.083/0.083	0.083/0.083
	Starting current (50Hz/60Hz)	A	0.54/0.55	0.55/0.57	0.96/1.00	0.97/1.00	1.15/1.20	1.15/1.20
Appearance				Pure White (Munsell N9.1)				
Dimensions (HxWxD)	mm	235x950x690		235x1270x690		235x1586x690		
Total weight	kg	24		30		39		
Soundproof / Heat-insulating material				Polyethylene foam				
Fan unit	Fan			Centrifugal fan (Sirocco fan)				
	Standard air flow (H/M/L)	m³/h	840/690/540	960/720/540	1440/1020/750	1440/1020/750	1860/1350/1020	1860/1530/1200
	Motor output	W		94			139	
Sound pressure level (H/M/L)	dB(A)	36/34/28	37/35/28	41/36/29	41/36/29	44/38/32	44/41/35	46/42/36
Sound power level	dB(A)	51	52	56	56	59	59	61
Air filter				Standard filter supplied (Long life filter)				
	Gas side	mm	12.7	12.7	15.9	15.9	15.9	15.9
Connecting pipe	Liquid side	mm	6.4	6.4	9.5	9.5	9.5	9.5
	Drain port (nominal dia)	mm		20 (Polyvinyl chloride tube)				

Notes : 1) The cooling capacities are measured under the conditions specified by JIS B 8615 based on the reference piping

The reference piping consists of 5 m of main piping and 2.5 m of branch piping connected with 0 m height


(*1.1) Indoor air temperature 27.0 °C DB/ 19.0 °C WB, outdoor air temperature 35.0 °C DB

(*1.2) Indoor air temperature 27.0 °C DB/ 19.5 °C WB, outdoor air temperature 35.0 °C DB


Drawings

Unit : mm





MMC-UP0151HP-T, MMC-UP0181HP-T

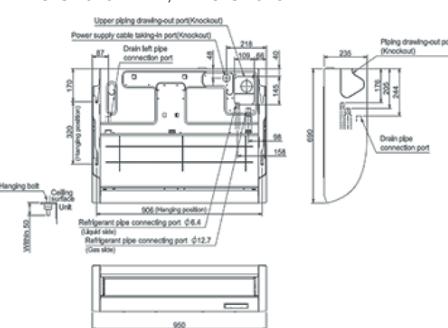

MMC-UP0241HP-T, MMC-UP0271HP-T

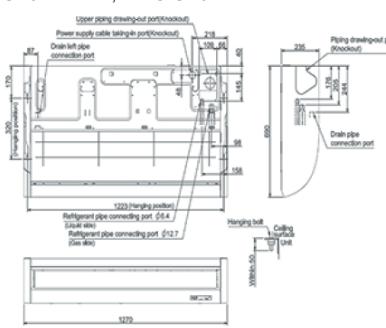

MMC-UP0361HP-T to MMC-UP0561HP-T

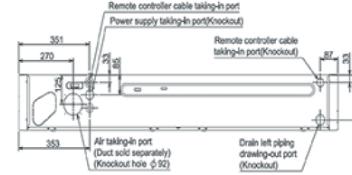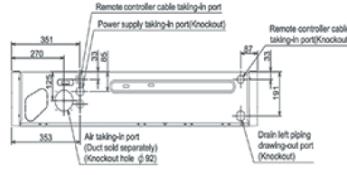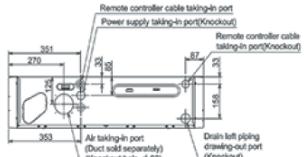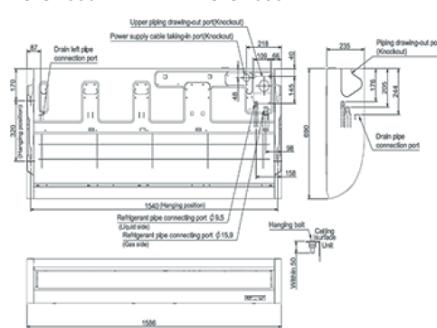


CEILING


Sound pressure levels

Unit : dB(A)


MMC-UP0151HP-T

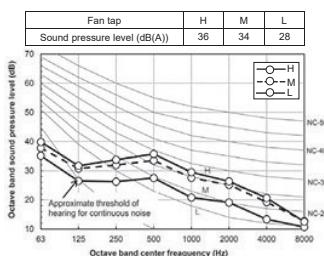


MMC-UP0181HP-T

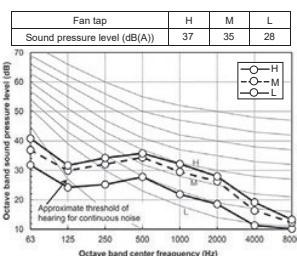


MMC-UP0241, 0271HP-T

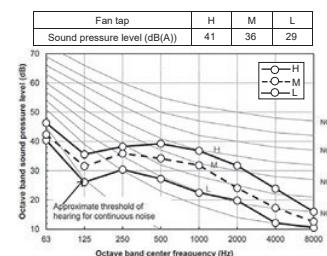


MMC-UP0361HP-T

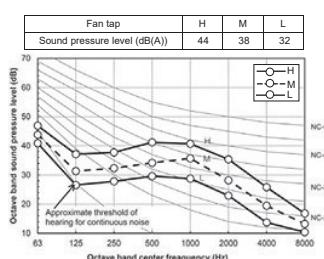

MMC-UP0481HP-T

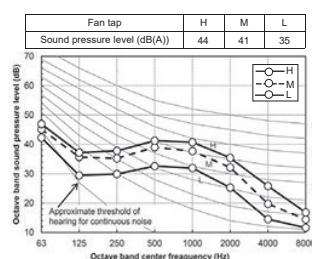

MMC-UP0561HP-T

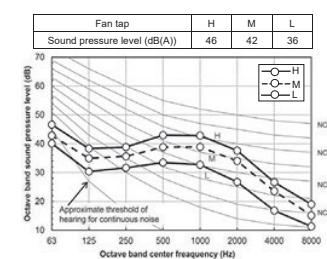


Air diffusion

Unit : m/s


MMC-UP0151HP-T

Cooling

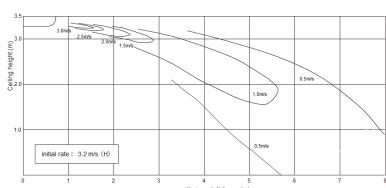


MMC-UP0181HP-T

Cooling

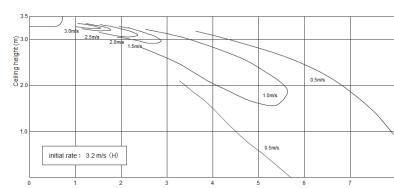


MMC-UP0241, 0271HP-T

Cooling

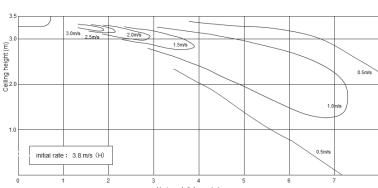


MMC-UP0361, 0481HP-T

Cooling

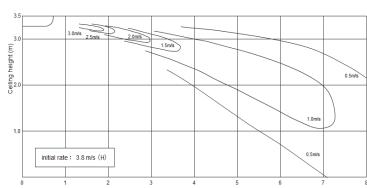


MMC-UP0561HP-T

Cooling

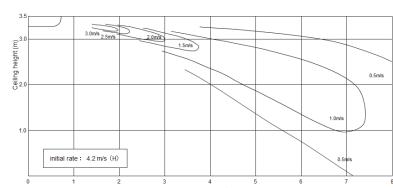

Accessories

No.	Part name	Model name	Applied model	Notes	Remarks
1	Wireless Remote Controller kit	RBC-AXU31C-E	MMC-UP_1HP-T		
2	Wireless Remote Controller	RBC-AXU31-E		For installing as stand alone	
3	Drain pump kit	TCB-DP31CE		Antibacterial glass is built into drain pump kit	
4	Elbow piping kit	TCB-KP14CPE	MMC-UP0151 to 0181HP-T	It is necessary for installation of drain pump kit	Use with TCB-DP31CE
5	Elbow piping kit	TCB-KP24CPE	MMC-UP0241 to 0561HP-T		
6	Option connecting kit	TCB-PCUC2E	MMC-UP_1HP-T	For external I/O signal without local relay preparation	

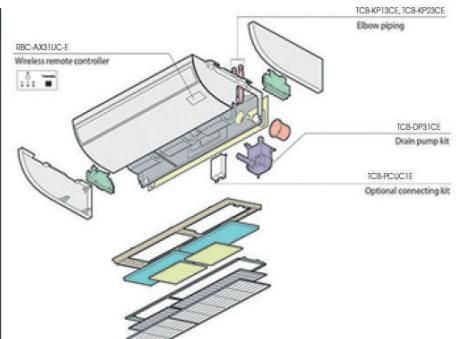


Ceiling connectors

*: Available

CN32	CN60	CN61	CN70	CN73	CN80
Additional ventilation control from remote control	Operation status signal output (Cooling, fan, thermo-on)	External On/Off, operation output and alarm output	Warning symbol on remote control based on signal input.	Forced IDU thermo-off based on signal input	Forced IDU thermo-off and IDU lock based on signal input
*	TCB-PCUC2E PCB needed	*	TCB-PCUC2E PCB needed	TCB-PCUC2E PCB needed	TCB-PCUC2E PCB needed

MMK-UP_1HP-T

HIGH-WALL

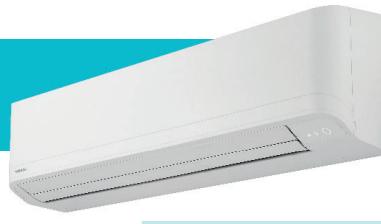

Particularly compact, this high-wall is perfect for limited spaces, such as offices or small shops.

CAPACITY



SOUND PRESSURE LEVEL



0.8 HP ~ 4 HP

25 dB(A)

LOCAL CONTROLS



RBC-ASCU11-E
RBC-AMTU31-E
RBC-AMSU51-EN/ES

Features

Model name	MMK-	UP0071HP-T	UP0091HP-T	UP0121HP-T	UP0151HP-T	UP0181HP-T	UP0241HP-T	UP0271HP-T	UP0301HP-T	UP0361HP-T						
Cooling capacity	kW	2.2	2.8	3.6	4.5	5.6	7.1	8.0	9.0	11.2						
	BTU(*1.1)	7,500	9,600	12,300	15,400	19,100	24,200	27,300	30,700	38,200						
	BTU(*1.2)	7,600	9,700	12,400	15,600	19,300	24,500	27,600	31,000	38,600						
Electrical characteristics	Power supply	1 phase 50Hz 230V (220-240V) / 1 phase 60Hz 220V														
	Running current (50Hz/60Hz)	A	0.15/0.16	0.16/0.17	0.17/0.18	0.25/0.26	0.28/0.29	0.40/0.42	0.28/0.30	0.44/0.46	0.52/0.56					
	Power consumption (50Hz/60Hz)	kW	0.015/0.015	0.016/0.016	0.017/0.017	0.028/0.028	0.032/0.032	0.050/0.050	0.034/0.034	0.054/0.054	0.066/0.066					
	Starting current (50Hz/60Hz)	A	0.19/0.20	0.20/0.21	0.21/0.22	0.33/0.35	0.36/0.38	0.48/0.50	0.34/0.34	0.50/0.50	0.60/0.60					
Dimensions (HxWxD)	mm	293x798x230			320x1050x250			348x1200x280								
Total weight	kg	11			16			21								
Soundproof / Heat-insulating material	Non-flammable insulation															
Fan unit	Fan	Cross Flow Fan														
	Standard air flow (H/M/L)	m³/h	480/385/270	510/395/270	540/410/270	840/690/550	900/720/550	1200/900/600	1200/1000/800	1500/1300/1100	1650/1350/1250					
Sound pressure level (H/M/L)	dB(A)	35/30/25	36/31/25	37/32/25	40/36/32	41/37/32	45/39/33	44/41/39	48/44/41	50/45/43						
Sound power level	dB(A)	50	51	52	55	56	60	60	63	65						
Air filter	Standard filter supplied (Long life filter)															
Connecting pipe	Gas side	mm	9.5	9.5	9.5	12.7	12.7	15.9	15.9	15.9						
	Liquid side	mm	6.4	6.4	6.4	6.4	6.4	9.5	9.5	9.5						
	Drain port (nominal dia)	mm	16 (Polyvinyl chloride tube)													

Notes : 1) The cooling capacities are measured under the conditions specified by JIS B 8615 based on the reference piping

The reference piping consists of 5 m of main piping and 2.5 m of branch piping connected with 0 m height


(*1.1) Indoor air temperature 27.0 °C DB / 19.0 °C WB, outdoor air temperature 35.0 °C DB

(*1.2) Indoor air temperature 27.0 °C DB / 19.5 °C WB, outdoor air temperature 35.0 °C DB


Drawings

Unit : mm


MMK-UP0071HP-T to MMK-UP121HP-T



MMK-UP151HP-T to MMK-UP241HP-T

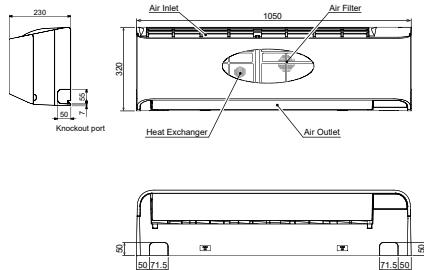


MMK-UP271HP-T to MMK-UP361HP-T

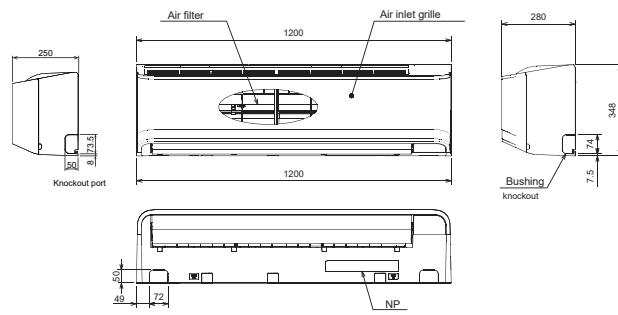


HIGH-WALL**Sound pressure levels**


MMK-UP0071HP-T

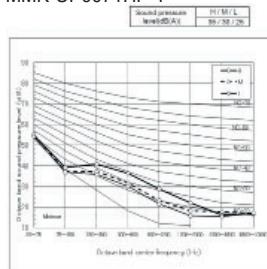


MMK-UP0181HP-T

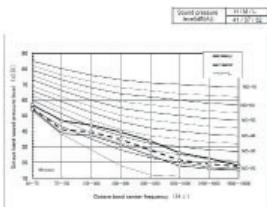


MMK-UP0361HP-T

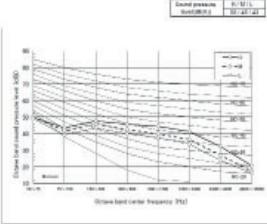


MMK-UP0091HP-T

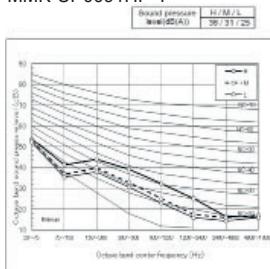


MMK-UP0241HP-T

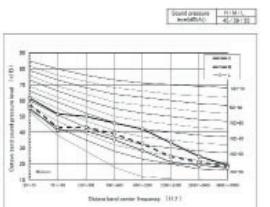


MMK-UP0121HP-T

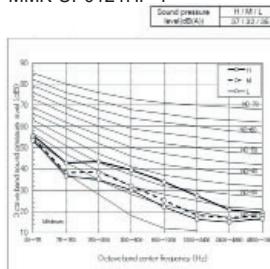


MMK-UP0271HP-T

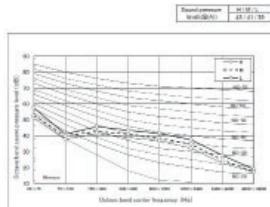

MMK-UP0151HP-T

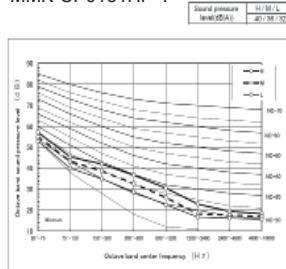


MMK-UP0301HP-T

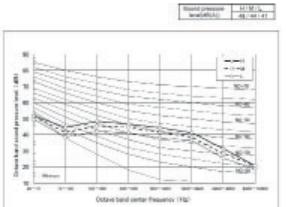**Air diffusion**


High wind: 3.9m/s
Mid wind: 3.0m/s
Low wind: 2.5m/s

MMK-UP0071HP-T

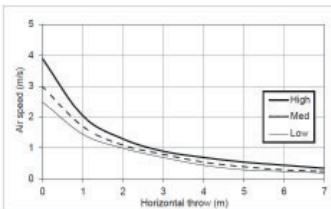


High wind: 4.1m/s
Mid wind: 3.2m/s
Low wind: 2.5m/s

MMK-UP0091HP-T

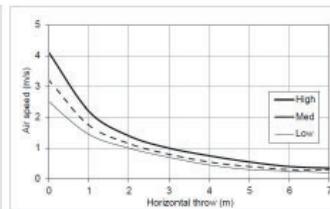


High wind: 4.3m/s
Mid wind: 3.4m/s
Low wind: 2.5m/s

MMK-UP0121HP-T

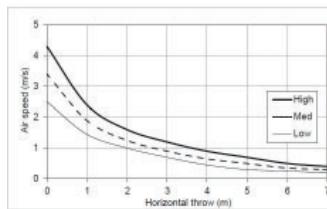


High wind: 4.6m/s
Mid wind: 3.7m/s
Low wind: 2.8m/s


MMK-UP0151HP-T

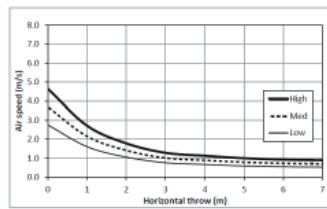


MMK-UP0181HP-T High wind: 5.0m/s
 Mid wind: 3.9m/s
 Low wind: 2.8m/s

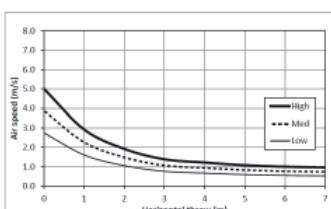


MMK-UP0241HP-T High wind: 6.5m/s
 Mid wind: 5.0m/s
 Low wind: 3.1m/s

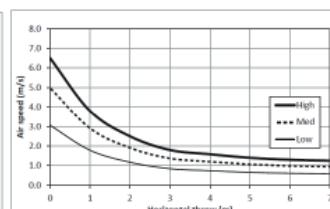


MMK-UP0271HP-T High wind: 6.5m/s
 Mid wind: 5.2m/s
 Low wind: 3.6m/s

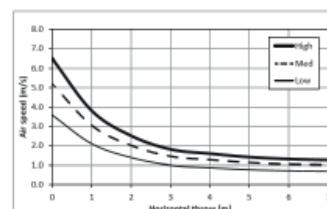

MMK-UP0301HP-T High wind: 7.5m/s
 Mid wind: 6.6m/s
 Low wind: 5.5m/s

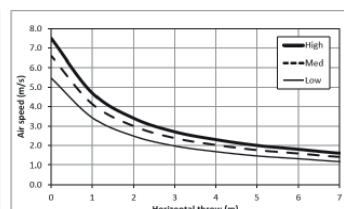

MMK-UP0361HP-T High wind: 8.0m/s
 Mid wind: 7.2m/s
 Low wind: 6.5m/s

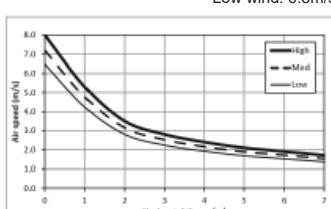**High wall connectors**

*: Available

CN32	CN60	CN61	CN70	CN73	CN80
Additional ventilation control from remote control	Operation status signal output (Cooling, fan, thermo-on)	External On/Off, operation output and alarm output	Warning symbol on remote control based on signal input.	Forced IDU thermo-off based on signal input	Forced IDU thermo-off and IDU lock based on signal input
*	*	*	TCB-PCUC2E PCB needed	TCB-PCUC2E PCB needed	*

ZONING AIRCONDITIONING UNIT

MMZ-UP0091F/MMZ-UP0091D ZONING AIRCONDITIONING UNIT

>NEW



Zoning airconditioning unit can be operated efficiently by supplying the required amount of cold air in specific spot or zone.

CAPACITY	SOUND PRESSURE LEVEL
1 HP	47/42 dB(A)

LOCAL CONTROLS



RBC-ASCU11-E
RBC-AMTU31-E
RBC-AMSU51-EN/ES

Features


Model name	MMZ	UP0091F Auto flap type	UP0091D Duct flange type
Capacity code	HP	1.0	1.0
Cooling capacity	kW	2.8	2.8
Electrical characteristics	Power supply	1 phase 50Hz 220-240V / 1 phase 60Hz 220V	
	Running current (50Hz/60Hz)	A	0.53/0.56
	Power consumption (50Hz/60Hz)	kW	0.061/0.061
	Starting current (50Hz/60Hz)	A	0.74/0.74
Appearance			Silky shade (Munsell: 1Y 8.5 / 0.5)
Outer Dimensions (HxWxD)	mm	500x500x322	500x500x322
Total weight	kg	13	15
Heat exchanger			Finned tube
Soundproof / Heat-insulating material			Acrylonitrile styrene foam
Fan unit	Fan		Propeller fan
	Standard air flow (H/M/L)	m³/h	912/726/558
	Air flow range	m³/h	342-912
	External static pressure (factory setting)	Pa	-
	External static pressure*	Pa	10
Sound pressure level (H/M/L)	dB(A)	57/52/47	52/48/42
Sound power level (H/M/L)	dB(A)	72/67/62	72/67/61
Air filter (Optional)			Standard filter
Controller (Optional)			Wired and infrared remote controller
Connecting pipe	Gas side	mm	9.5
	Liquid side	mm	6.4
	Drain port (nominal dia)	mm	R1

Avoid installing in the following places.


- A kitchen in restaurant or places around machines and equipment in a factory, where a lot of oils are used.(Oil adhering to the heat exchanger and the resin parts in the indoor unit may lower the unit performance, splash water drops, or produce mist and may cause the resin parts to be deformed or damaged.)
- Places where iron or other metal dust is present. If iron or other metal dust adheres to or collects on the interior of the air conditioner, it may spontaneously combusted and start a fire.

Drawings

MMZ-UP0091F

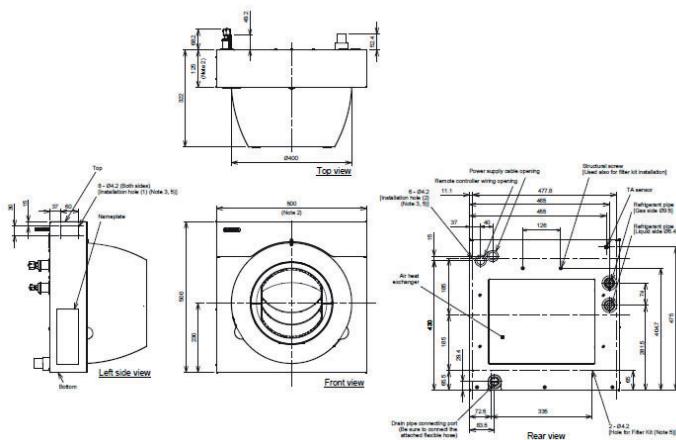

MMZ-UP0091D


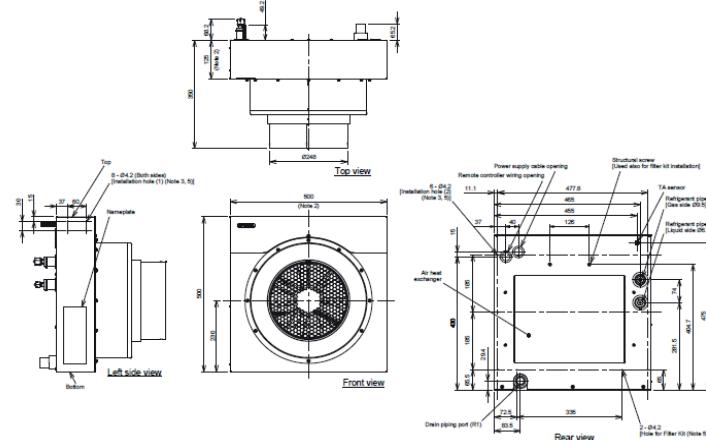


Unit : mm

ZONING AIRCONDITIONING UNIT

Sound pressure levels


Unit : dB(A)

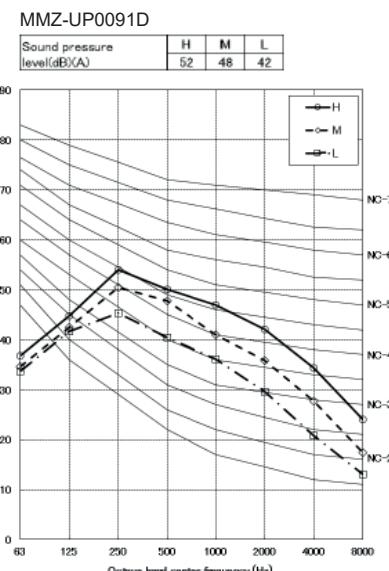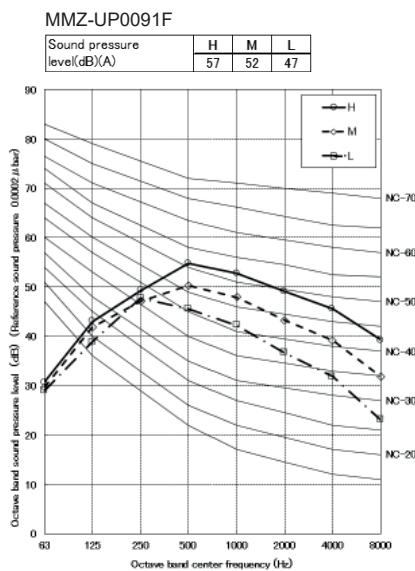

Air diffusion

Unit : m/s

MMZ-UP0091F

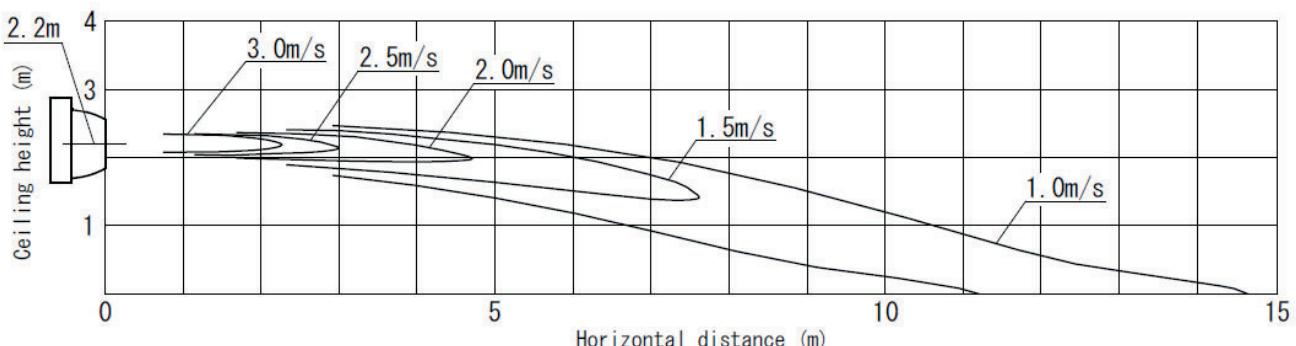

Accessories

No.	Part name	Model name	Applied model	Notes	Remarks
1	Hanging fitting	TCB-TK0091Z-E	MMZ-UP0091F & MMZ-UP0091D	For installing by hanging bolt	
2	Fixing bracket	TCB-TB0091Z-E		For installing on the pillar and wall	
3	Filter kit	TCB-LK0091Z-E			
4	Replacement filter	TCB-PF0091Z-E			
5	Extension valve kit	TCB-VA0091Z-E			

Zoning airconditioning unit connectors

*: Available

CN32	CN60	CN61	CN70	CN73	CN80
Additional ventilation control from remote control	Operation status signal output (Cooling, fan, thermo-on)	External On/Off, operation output and alarm output	Warning symbol on remote control based on signal input.	Forced IDU thermo-off based on signal input	Forced IDU thermo-off and IDU lock based on signal input
*	TCB-PCUC2E PCB needed	*	TCB-PCUC2E PCB needed	TCB-PCUC2E PCB needed	TCB-PCUC2E PCB needed

FLOOR STANDING

MML-UP_1BH-E FLOOR STANDING CONCEALED



This slim unit is designed to easily fit into a compact space and to perfectly integrate itself behind a decorative panel. This is the ideal solution that blends into any interior.

CAPACITY



SOUND PRESSURE LEVEL



0.8 HP ~ 2.5 HP

32 dB(A)

LOCAL CONTROLS



RBC-AXU31-E



RBC-ASCU11-E
RBC-AMTU31-E
RBC-AMSU51-EN/ES

Features

Model name	MML-	UP0071BH-E	UP0091BH-E	UP0121BH-E	UP0151BH-E	UP0181BH-E	UP0241BH-E
Cooling capacity	kW	2.2	2.8	3.6	4.5	5.6	7.1
BTU(*1.1)	BTU(*1.2)	7,500	9,600	12,300	15,400	19,100	24,200
BTU(*1.2)		7,600	9,700	12,400	15,600	19,300	24,500
Electrical characteristics	Power supply			1 phase 50Hz 230V (220-240V) / 1 phase 60Hz 220V			
	Running current (50Hz/60Hz)	A	0.25/0.27		0.45/0.46		0.46/0.51
	Power consumption (50Hz/60Hz)	kW	0.056/0.058		0.090/0.096		0.095/0.110
	Starting current (50Hz/60Hz)	A	0.60/0.60		0.80/0.80		1.00/1.00
Appearance			Zinc hot dipping steel plate				
Dimensions (HxWxD)	mm	600x745x220		600x1045x220			
Total weight	kg	21		28			
Soundproof / Heat-insulating material			Non-flammable insulation				
Fan unit	Fan		Centrifugal fan				
	Standard air flow (H/M/L)	m³/h	460/400/300		740/600/490		950/790/640
	Motor output	W	19		70		
Sound pressure level (H/M/L)	dB(A)		36/34/32				42/37/33
Sound power level	dB(A)		54				60
Air filter			Standard filter supplied (Simple filter)				
Connecting pipe	Gas side	mm	9.5	9.5	9.5	12.7	12.7
	Liquid side	mm	6.4	6.4	6.4	6.4	6.4
	Drain port (nominal dia)	mm		20 (Polyvinyl chloride tube)			9.5

Notes : 1) The cooling capacities are measured under the conditions specified by JIS B 8615 based on the reference piping


The reference piping consists of 5 m of main piping and 2.5 m of branch piping connected with 0 m height

(*1.1) Indoor air temperature 27.0 °C DB/ 19.0 °C WB, outdoor air temperature 35.0 °C DB

(*1.2) Indoor air temperature 27.0 °C DB/ 19.5 °C WB, outdoor air temperature 35.0 °C DB

Drawings

All model

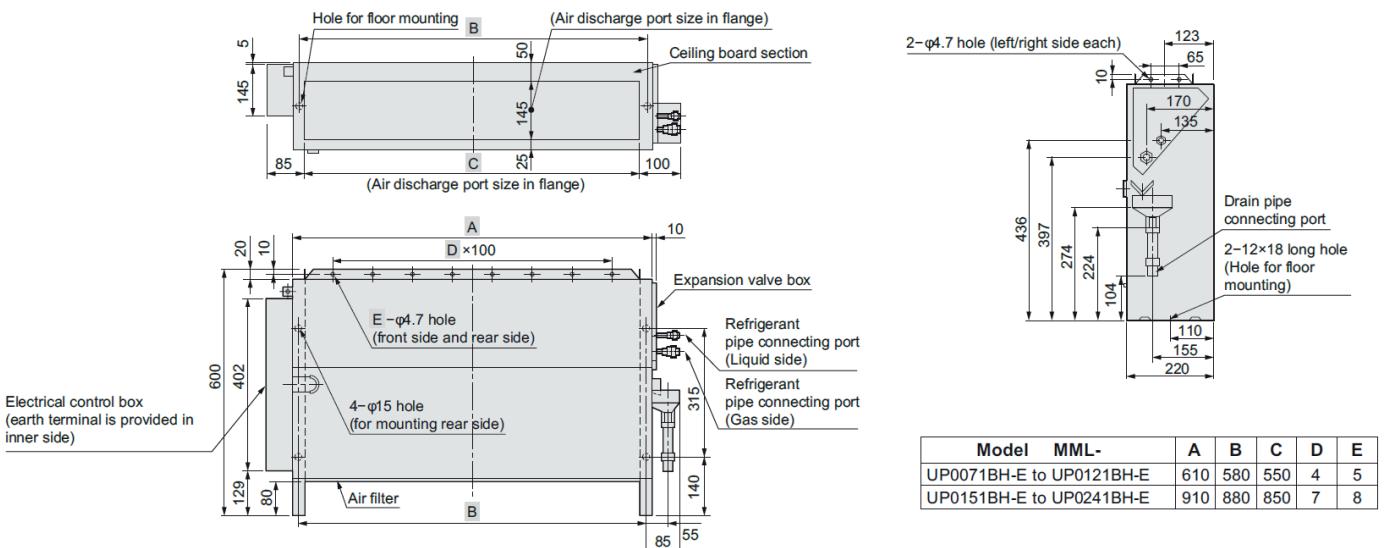


FLOOR STANDING CONCEALED


Sound pressure levels

Unit : dB(A)


MML-UP0071, 0091, 0121BH-E

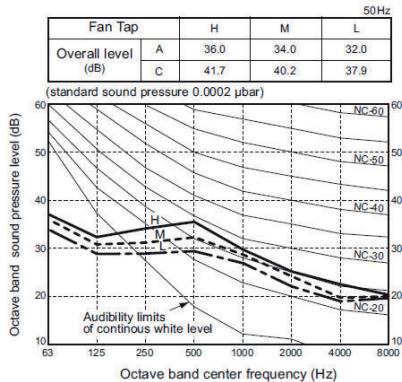

MML-UP0151, 0181BH-E

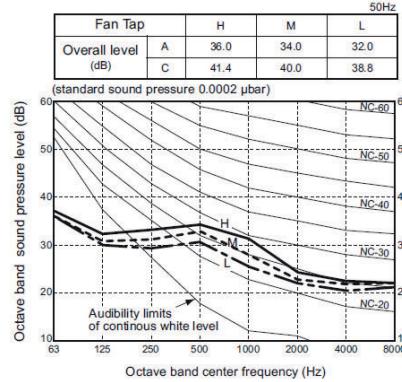

MML-UP0241BH-E

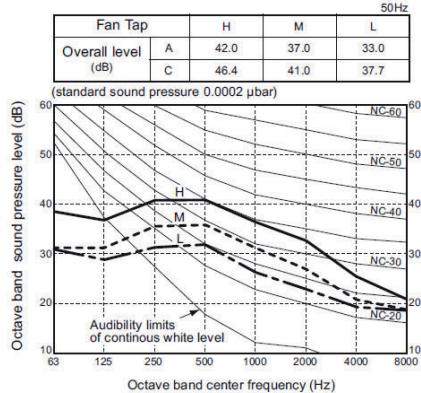

Floor standing concealed connectors

• : Available

CN32	CN60	CN61	CN70	CN73	CN80
Additional ventilation control from remote control	Operation status signal output (Cooling, fan, thermo-on)	External On/Off, operation output and alarm output	Warning symbol on remote control based on signal input.	Forced IDU thermo-off based on signal input	Forced IDU thermo-off and IDU lock based on signal input
•	•	•	•	•	•

FLOOR STANDING

MML-UP_1H-E FLOOR STANDING CABINET



The simple design of this unit represents the perfect choice for refurbishment projects, where the available space is limited, or where neither the walls nor ceiling is able to house the unit.

CAPACITY



0.8 HP ~ 2.5 HP

SOUND PRESSURE LEVEL



35 dB(A)

LOCAL CONTROLS



RBC-AXU31-E



RBC-ASCU11-E
RBC-AMTU31-E
RBC-AMSU51-EN/ES

Features

Model name	MML-	UP0071H-E	UP0091H-E	UP0121H-E	UP0151H-E	UP0181H-E	UP0241H-E		
Cooling capacity	kW	2.2	2.8	3.6	4.5	5.6	7.1		
BTU(*1.1)		7,500	9,600	12,300	15,400	19,100	24,200		
BTU(*1.2)		7,600	9,700	12,400	15,600	19,300	24,500		
Electrical characteristics	Power supply	1 phase 50Hz 230V (220-240V) / 1 phase 60Hz 220V							
	Running current (50Hz/60Hz)	A	0.26/0.25	0.43/0.44	0.47/0.53				
	Power consumption (50Hz/60Hz)	kW	0.056/0.044	0.092/0.069	0.102/0.076				
	Starting current (50Hz/60Hz)	A	0.60/0.60	0.80/0.80	1.10/1.10				
Appearance	Silky shade (Y18.5/0.5)								
Dimensions (HxWxD)	mm	630x950x230							
Total weight	kg	35				38			
Soundproof / Heat-insulating material	Non-flammable insulation								
Fan unit	Fan	Centrifugal fan							
	Standard air flow (H/M/L)	m³/h	480/420/360	900/780/650	1080/930/780				
	Motor output	W	45				70		
Sound pressure level (H/M/L)	dB(A)	39/37/35		45/41/38		49/44/39			
Sound power level	dB(A)	54		60		64			
Air filter	Standard filter supplied (Simple filter)								
Connecting pipe	Gas side	mm	9.5	9.5	9.5	12.7	12.7		
	Liquid side	mm	6.4	6.4	6.4	6.4	9.5		
	Drain port (nominal dia)	mm	20 (Polyvinyl chloride tube)						

Notes : 1) The cooling capacities are measured under the conditions specified by JIS B 8615 based on the reference piping

The reference piping consists of 5 m of main piping and 2.5 m of branch piping connected with 0 m height


(*1.1) Indoor air temperature 27.0 °C DB/ 19.0 °C WB, outdoor air temperature 35.0 °C DB

(*1.2) Indoor air temperature 27.0 °C DB/ 19.5 °C WB, outdoor air temperature 35.0 °C DB

Drawings

Unit : mm

All model

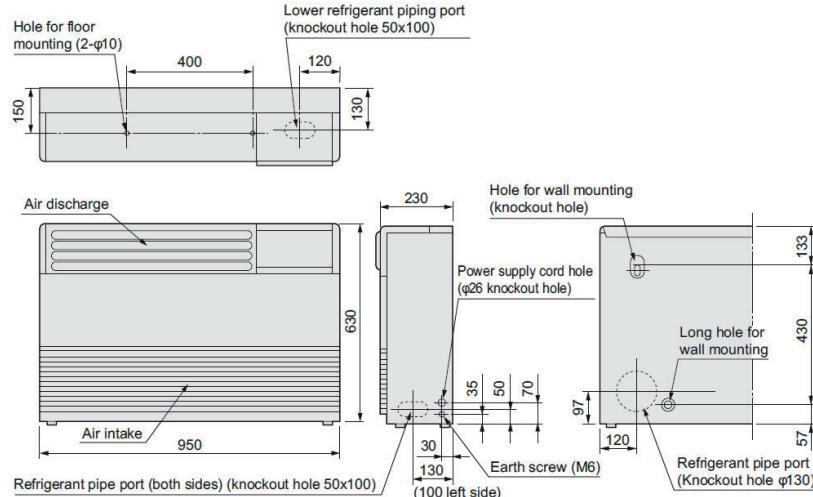


FLOOR STANDING CABINET

Sound pressure levels

Unit : dB(A)


MML-UP0071, 0091H-E

Fan tap	H	M	L
Sound pressure level (dB(A))	39	37	35

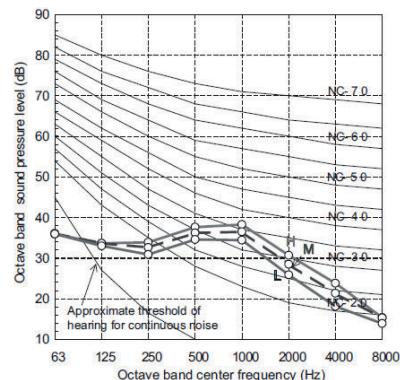


MML-UP0121, 0151H-E

Fan tap	H	M	L
Sound pressure level (dB(A))	45	41	38

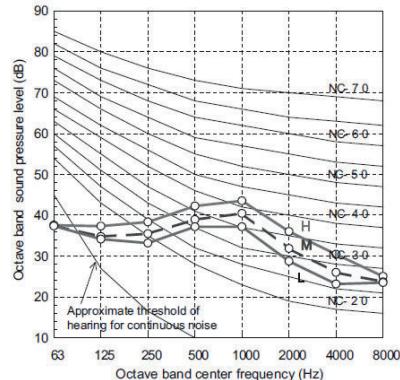

MML-UP0181, 0241H-E


Fan tap	H	M	L
Sound pressure level (dB(A))	49	44	39

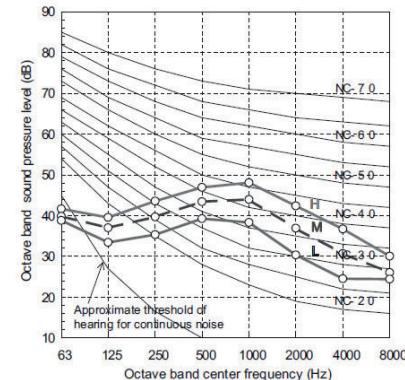


Air diffusion

Unit : m/s


MML-UP0071, 0091H-E

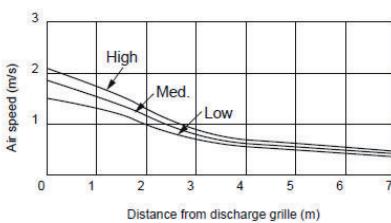

MML-UP0121, 0151H-E

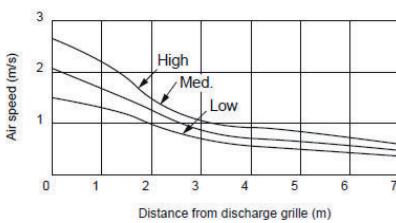

MML-UP0181, 0241H-E

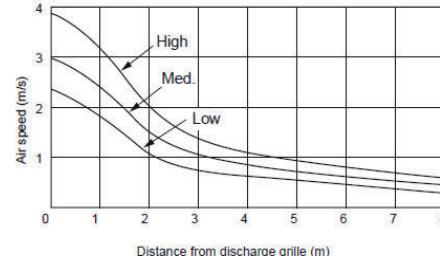

Floor standing cabinet connectors

• : Available

CN32	CN60	CN61	CN70	CN73	CN80
Additional ventilation control from remote control	Operation status signal output (Cooling, fan, thermo-on)	External On/Off, operation output and alarm output	Warning symbol on remote control based on signal input.	Forced IDU thermo-off based on signal input	Forced IDU thermo-off and IDU lock based on signal input
•	•	•	•	•	•

CONSOLE

MML-UP_1NHP-T CONSOLE



Innovative and compact unit to be installed on the floor and in low wall applications, fits perfectly under the window sills or in a low ceiling attic.

CAPACITY



SOUND PRESSURE LEVEL



0.8 HP ~ 2 HP

26 dB(A)

LOCAL CONTROLS



Included



RBC-ASCU11-E
RBC-AMTU31-E
RBC-AMSU51-EN/ES

Features

Model name	MML-	UP0071NHP-T	UP0091NHP-T	UP0121NHP-T	UP0151NHP-T	UP0181NHP-T	
Cooling capacity	kW	2.2	2.8	3.6	4.5	5.6	
	BTU(*1.1)	7,500	9,600	12,300	15,400	19,100	
	BTU(*1.2)	7,600	9,700	12,400	15,600	19,300	
Electrical characteristics	Power supply	1 phase 50Hz 230V (220-240V) / 1 phase 60Hz 220V					
	Running current (50Hz/60Hz)	A	0.20/0.17	0.20/0.17	0.23/0.19	0.29/0.25	
	Power consumption (50Hz/60Hz)	kW	0.021/0.021	0.021/0.021	0.025/0.025	0.034/0.034	
	Starting current (50Hz/60Hz)	A	0.26/0.22	0.26/0.22	0.30/0.30	0.33/0.38	
Appearance	Air intake grille and side panel	Moon white (Munsell : 2.5GY 9.0/0.5)					
	Discharge-grille	Moon white (Munsell : 2.5GY 9.0/0.5)					
	Bottom surface	Moon white (Munsell : 2.5GY 9.0/0.5)					
Dimensions (HxWxD)	mm	600x700x220					
Total weight	kg	17					
Soundproof / Heat-insulating material	Foamed polystyrene / Polyethylene						
Fan unit	Fan	Turbo fan					
	Standard air flow (H/M/L)	m ³ /h	510/366/282	510/366/282	552/408/324	624/468/384	
	Motor output	W	41				
Sound pressure level (H/M/L)	dB(A)	38/32/26	38/32/26	40/34/29	43/37/31	47/40/34	
Sound power level	dB(A)	53	53	55	58	62	
Air filter	Standard filter supplied (Long life filter)						
Connecting pipe	Gas side	mm	9.5	9.5	9.5	12.7	
	Liquid side	mm	6.4	6.4	6.4	6.4	
	Drain port (nominal dia)	mm	16 (Polypropylene tube)				

Notes : 1) The cooling capacities are measured under the conditions specified by JIS B 8615 based on the reference piping

The reference piping consists of 5 m of main piping and 2.5 m of branch piping connected with 0 m height




(*1.1) Indoor air temperature 27.0 °C DB/ 19.0 °C WB, outdoor air temperature 35.0 °C DB

(*1.2) Indoor air temperature 27.0 °C DB/ 19.5 °C WB, outdoor air temperature 35.0 °C DB

Drawings

All model

Unit : mm

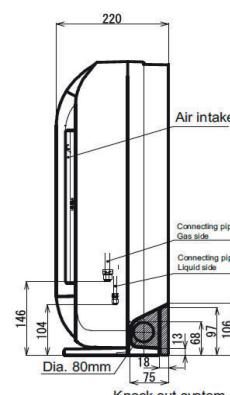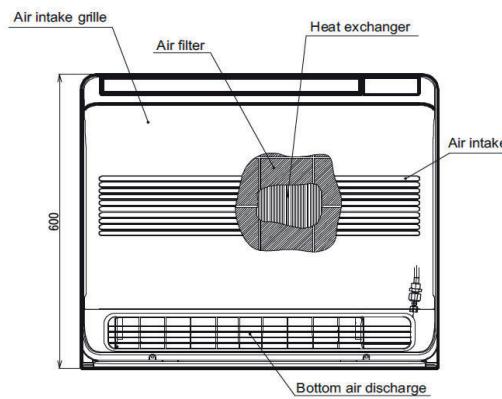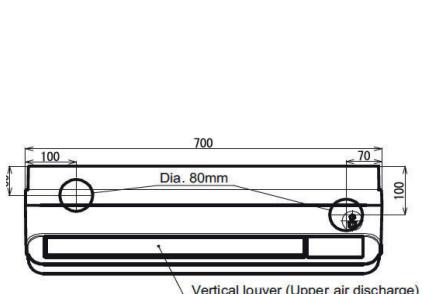


CONSOLE

Sound pressure levels

Unit : dB(A)

MML-UP0071, 0091NHP-T

Fan tap	H	M	L
Sound pressure level (dB(A))	38	32	26

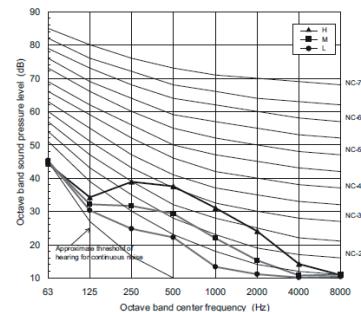


MML-UP0121NHP-T

Fan tap	H	M	L
Sound pressure level (dB(A))	40	34	29


MML-UP0121NHP-T

Fan tap	H	M	L
Sound pressure level (dB(A))	40	34	29

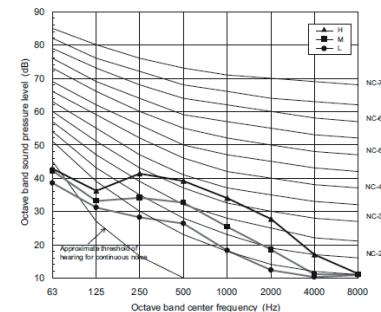


MML-UP0151NHP-T

Fan tap	H	M	L
Sound pressure level (dB(A))	43	37	31

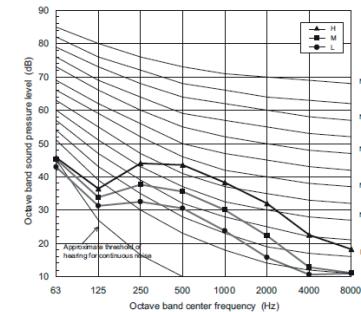

MML-UP0181NHP-T


Fan tap	H	M	L
Sound pressure level (dB(A))	47	40	34

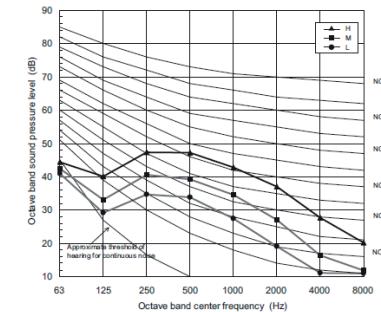

Air diffusion


Unit : m/s

MML-UP0071, 0091NHP-T
Cooling - Upper & Lower

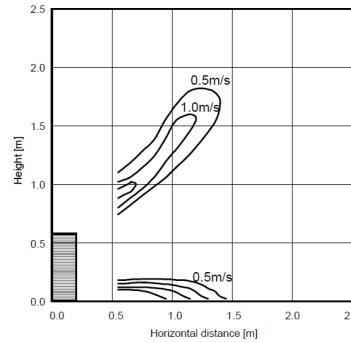


MML-UP0121NHP-T
Cooling - Upper & Lower


MML-UP0121NHP-T
Cooling - Upper & Lower

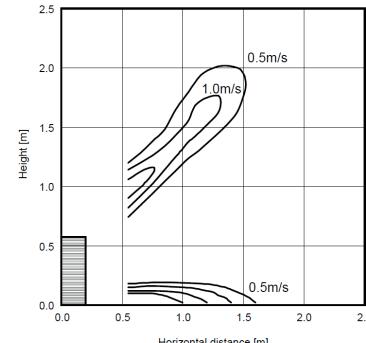

MML-UP0151NHP-T
Cooling - Upper & Lower

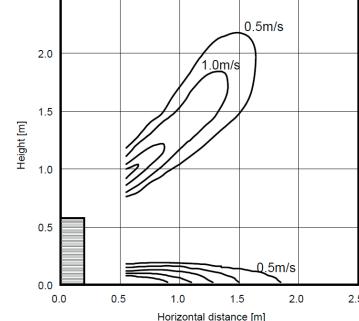

MML-UP0181NHP-T
Cooling - Upper & Lower

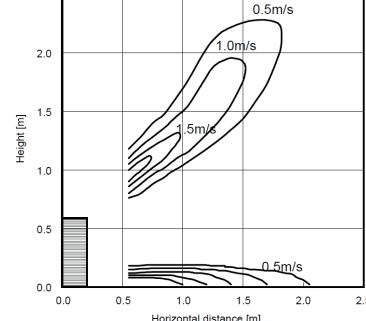

Console connectors

• : Available

CN32	CN60	CN61	CN70	CN73	CN80
Additional ventilation control from remote control	Operation status signal output (Cooling, fan, thermo-on)	External On/Off, operation output and alarm output	Warning symbol on remote control based on signal input.	Forced IDU thermo-off based on signal input	Forced IDU thermo-off and IDU lock based on signal input
•	•	•	TCB-PCUC2E PCB needed	TCB-PCUC2E PCB needed	•

FLOOR STANDING

MMF-UP_1H-E

FLOOR STANDING



This system is particularly suitable for large rooms air condition like shops, showrooms and with low ceilings like restaurants.



LOCAL CONTROLS



RBC-AXU31-E



RBC-ASCU11-E
RBC-AMTU31-E
RBC-AMSU51-EN/ES

Features

Model name		MMF-	UP0151H-E	UP0181H-E	UP0241H-E	UP0271H-E	UP0361H-E	UP0481H-E	UP0561H-E							
Cooling capacity		kW	4.5	5.6	7.1	8.0	11.2	14.0	16.0							
	BTU(*1.1)		15,400	19,100	24,200	27,300	38,200	47,800	54,600							
	BTU(*1.2)		15,600	19,300	24,500	27,600	38,600	48,400	55,300							
Electrical characteristics	Power supply		1 phase 50Hz 230V (220-240V) / 1 phase 60Hz 220V													
	Running current (50Hz/60Hz)		A	0.37/0.38	0.55/0.58	0.82/0.86	0.97/1.02									
	Power consumption (50Hz/60Hz)		kW	0.053/0.053	0.087/0.087	0.133/0.133	0.158/0.158									
	Starting current (50Hz/60Hz)		A	0.48/0.50	0.71/0.75	1.06/1.11	1.27/1.33									
Appearance		Silky shade (Munsell / 1Y 8.5 / 8.0)														
Dimensions (HxWxD)			mm	1750x600x210			1750x600x390									
Total weight			kg	46	47	61										
Soundproof / Heat-insulating material			Non-flammable insulation													
Fan unit	Fan		Centrifugal fan													
	Standard air flow (H/M/L)		m³/h	820/700/600	930/770/640	1660/1420/1170	1760/1480/1350									
	Motor output		W	62			109									
Sound pressure level (H/M/L)			dB(A)	46/42/38	50/45/41	51/46/41	53/48/45									
Sound power level			dB(A)	64	67	69	72									
Air filter			Standard filter supplied (Simple filter)													
Connecting pipe	Gas side		mm	12.7	12.7	12.7	12.7	12.7	12.7							
	Liquid side		mm	6.4	6.4	6.4	9.5	9.5	9.5							
	Drain port (nominal dia)		mm	20 (Polyvinyl chloride tube)												

Notes : 1) The cooling capacities are measured under the conditions specified by JIS B 8615 based on the reference piping.

The reference piping consists of 5 m of main piping and 2.5 m of branch piping connected with 0 m height


(*1.1) Indoor air temperature 27.0 °C DB/ 19.0 °C WB, outdoor air temperature 35.0 °C DB

(*1.2) Indoor air temperature 27.0 °C DB/ 19.5 °C WB, outdoor air temperature 35.0 °C DB


Drawings

Unit : mm

MME-UP0151H-E to MME-UP0271H-E

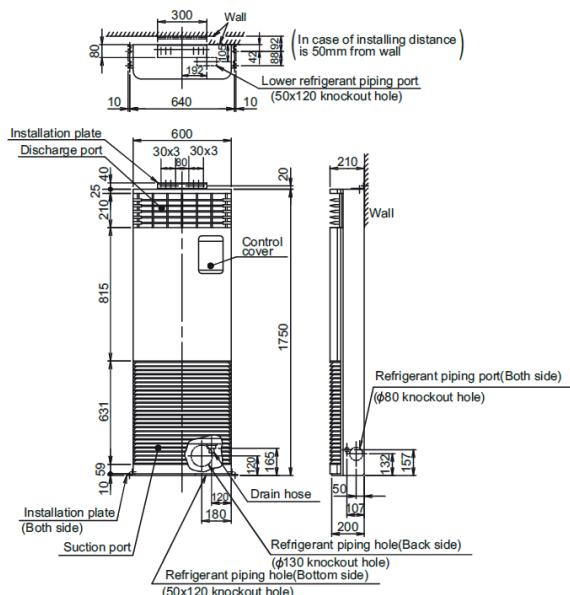


MME-UP0361H-E to MME-UP0561H-E

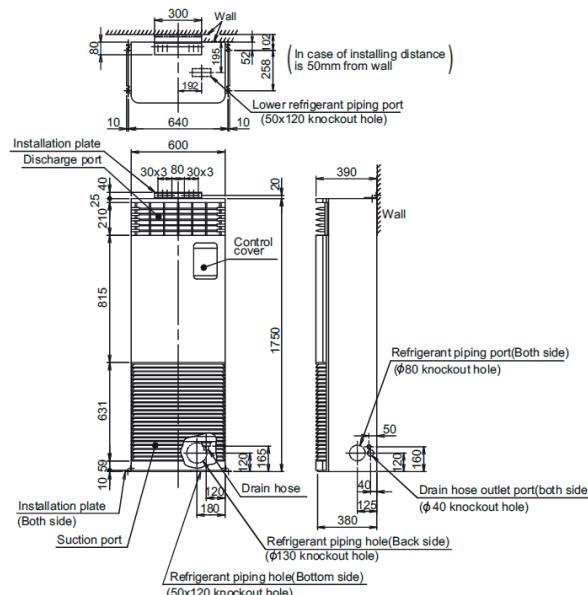

FLOOR STANDING


Sound pressure levels

Unit : dB(A)

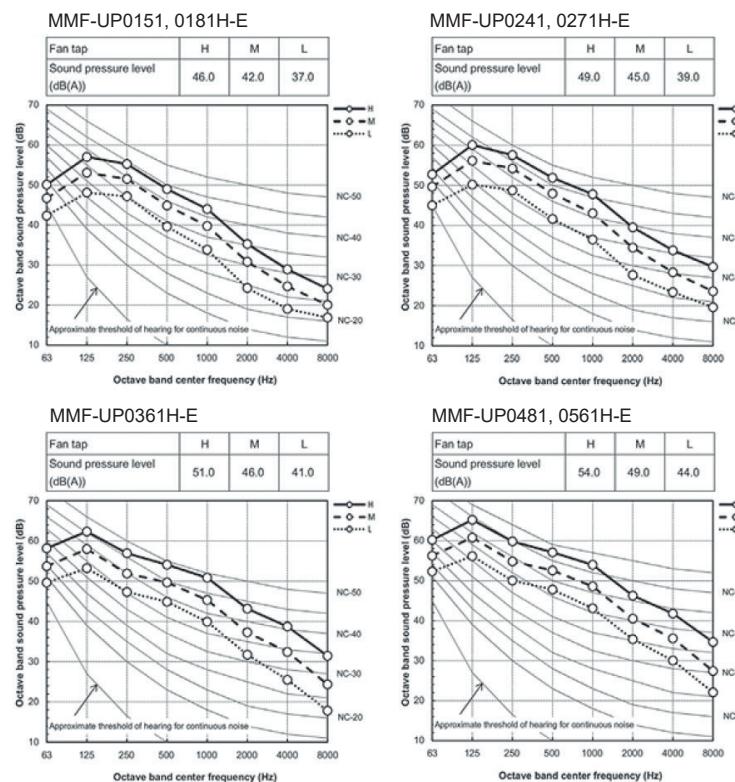

Air diffusion

Unit : m/s

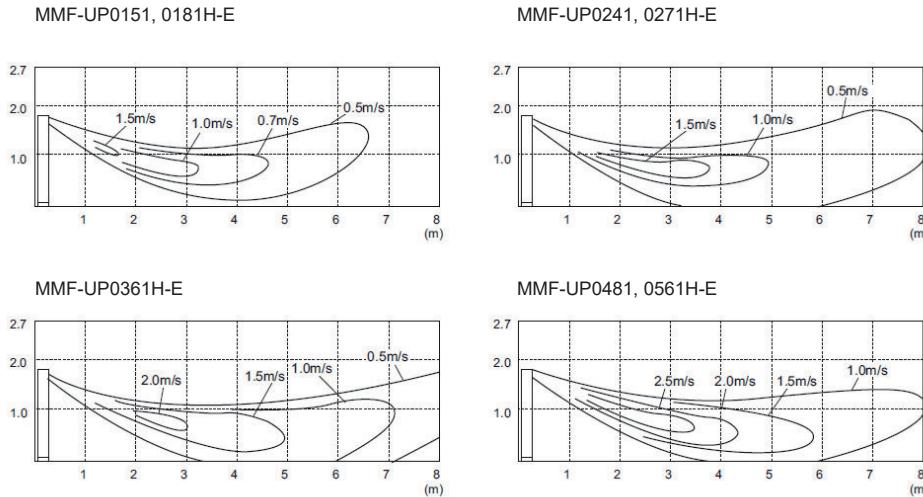

Floor standing connectors

• : Available

CN32	CN60	CN61	CN70	CN73	CN80
Additional ventilation control from remote control	Operation status signal output (Cooling, fan, thermo-on)	External On/Off, operation output and alarm output	Warning symbol on remote control based on signal input.	Forced IDU thermo-off based on signal input	Forced IDU thermo-off and IDU lock based on signal input
•	TCB-PCUC2E PCB needed	•	TCB-PCUC2E PCB needed	TCB-PCUC2E PCB needed	TCB-PCUC2E PCB needed

FLOOR STANDING

MMF-AP_5(D)HP-VA LARGE CAPACITY FLOOR STANDING



This system is particularly suitable for large rooms air conditioning like warehouse, factory and shopping mall.



8 HP ~ 20 HP



AIR FLOW
Up to 3,600m³/h ~ 8,400m³/h



SOUND PRESSURE LEVEL
59 dB(A)

LOCAL CONTROLS



RBC-AXU31-E



RBC-ASCU11-E
RBC-AMTU31-E
RBC-AMSU51-EN/ES

Features

Model name	MMF-	Ducted Type				Direct Blow Type				
		AP0725DHP-VA	AP0965DHP-VA	AP1445DHP-VA	AP1925DHP-VA	AP0725HP-VA	AP0965HP-VA	AP1445HP-VA	AP1925HP-VA	
Cooling capacity	kW	22.4	28.0	45.0	56.0	22.4	28.0	45.0	56.0	
BTU(*1.1)		76,400	95,500	153,500	191,100	76,400	95,500	153,500	191,100	
BTU(*1.2)		77,300	96,700	155,500	193,600	77,300	96,700	155,500	193,600	
Electrical characteristics	Power supply	VA: 3 phase 50Hz 380-415V								
	Running current (50Hz/60Hz)	A	1.68/1.69	2.85/2.74	4.26/4.16	5.67/5.18	1.42/1.29	2.27/1.94	2.91/2.54	3.77/3.49
	Power consumption (50Hz/60Hz)	kW	0.83/0.93	1.35/1.48	2.30/2.41	2.67/2.80	0.62/0.67	0.80/0.86	1.28/1.31	1.96/1.98
	Starting current (50Hz/60Hz)	A	9.4/8.2	19.6/17.7	31.5/27.0	45.6/42.0	9.4/8.2	19.6/17.7	31.5/27.0	31.5/27.0
Appearance	Cream (5Y 7/1.5)									
Dimensions (HxWxD)	mm	1820x890x540		1870x1300x760		2130x890x540		2280x1300x760		
Total weight	kg	150	155	280	290	170	175	320		
Heat exchanger	Copper tubes, Aluminum plate fins									
Soundproof / Heat-insulating material	Polyolefin form									
Fan unit	Fan	Multi blades centrifugal; Belt drive								
	Standard air flow	m³/h	3600	4500	7200	8400	3600	4200	7200	8400
	Air flow limit (Lower/Upper)	m³/h	2880/4320	3360/5040	5760/8640	6720/10080	2880/4320	3360/5040	5760/8640	6720/10080
	External static pressure	Pa	200	300	300	300	-	-	-	-
Sound pressure level	dB(A)	59	64	66	68	60	64	63	66	
Air filter	Standard filter supplied (Simple filter)									
Connecting pipe	Gas side	mm	22.2		28.6		22.2		28.6	
	Liquid side	mm	12.7		15.9		12.7		15.9	
	Drain port (nominal dia)	mm	25 (Both sides of male screw)							

*1: Because these models can support only old communication protocol, please communicate with local distributor if you want to connect these indoor units.

Notes : 1) The cooling capacities are measured under the conditions specified by JIS B 8615 based on the reference piping

The reference piping consists of 5 m of main piping and 2.5 m of branch piping connected with 0 m height


(*1.1) Indoor air temperature 27.0 °C DB/ 19.0 °C WB, outdoor air temperature 35.0 °C DB

(*1.2) Indoor air temperature 27.0 °C DB/ 19.5 °C WB, outdoor air temperature 35.0 °C DB


Drawings

Unit : mm


MMF-AP0725DHP-VA,
MMF-AP0965DHP-VA




MMF-AP1445DHP-VA,
MMF-AP1925DHP-VA



MMF-AP0725HP-VA,
MMF-AP0965HP-VA



MMF-AP1445HP-VA,
MMF-AP1925HP-VA

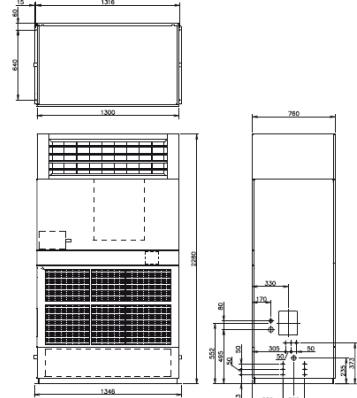


LARGE CAPACITY FLOOR STANDING


Sound pressure levels

Unit : dB(A)


MMF-AP0725DHP-VA

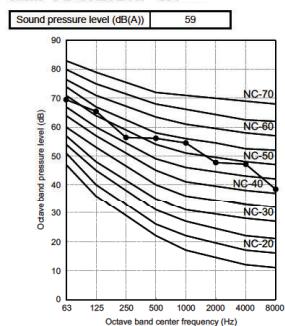


MMF-AP0965DHP-VA

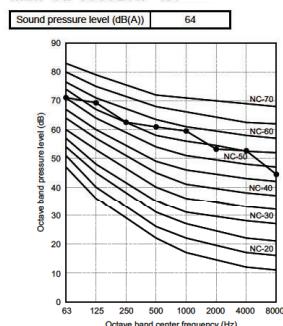


MMF-AP1445DHP-VA

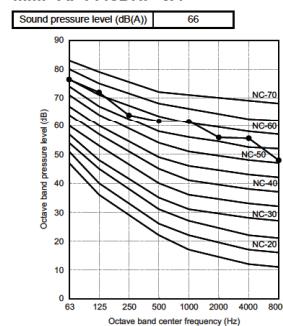


MMF-AP1925DHP-VA

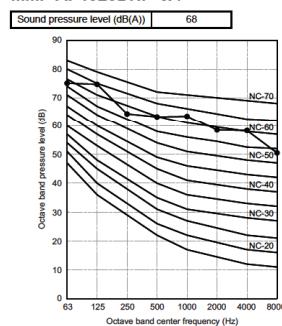


MMF-AP0725HP-VA

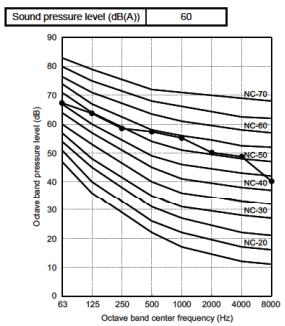


MMF-AP0965HP-VA

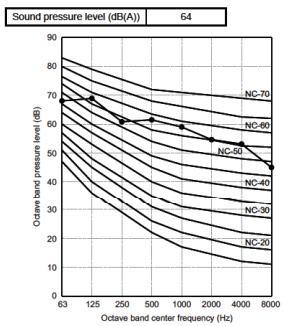

MMF-AP1445HP-VA

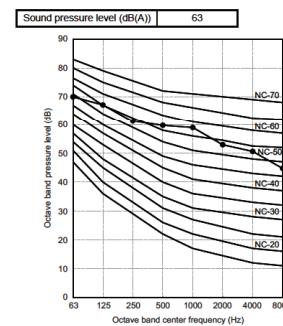


MMF-AP1925HP-VA

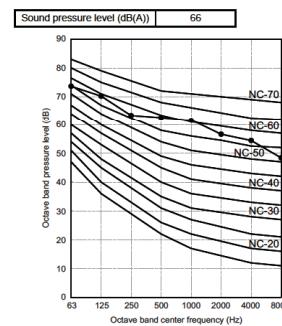


Air diffusion

Unit : m/s


MMF-AP0725HP-VA

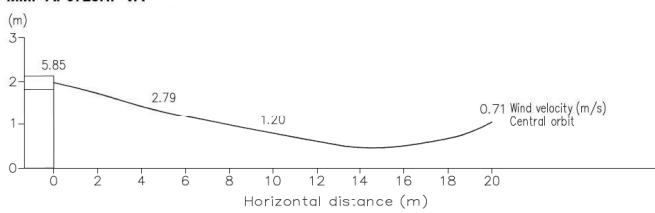


MMF-AP0965HP-VA

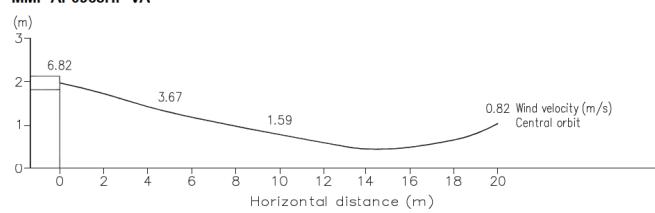

MMF-AP1445HP-VA

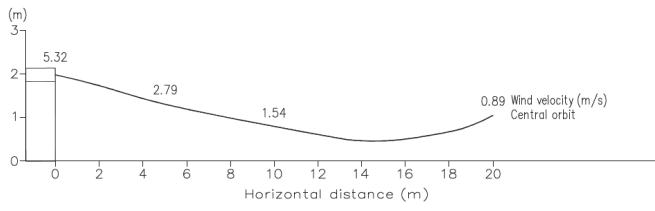

MMF-AP1925HP-VA

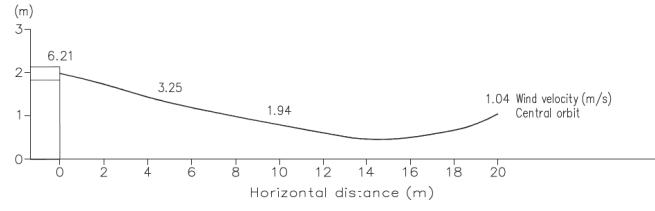

Large capacity floor standing connectors

• : Available

CN32	CN60	CN61	CN70	CN73	CN80
Additional ventilation control from remote control	Operation status signal output (Cooling, fan, thermo-on)	External On/Off, operation output and alarm output	Warning symbol on remote control based on signal input.	Forced IDU thermo-off based on signal input	Forced IDU thermo-off and IDU lock based on signal input
•	TCB-PCUC2E PCB needed	•	TCB-PCUC2E PCB needed	TCB-PCUC2E PCB needed	TCB-PCUC2E PCB needed

MMD-VN

AIR-TO-AIR HEAT EXCHANGER WITH DX-COIL



MMD-VN ventilation products are using exhaust air + DX-coil to pre-condition the incoming air, thus reducing the cooling load and the overall size of the required air conditioning system.

CAPACITY



4.1 kW ~ 8.25 kW

AIR FLOW



Up to 500m³/h ~ 950m³/h

SOUND PRESSURE LEVEL



34.5 dB(A)

LOCAL CONTROLS

NRC-01HE
RBC-AMTU31E

Features

Model name		MMD-	Without humidifier				
			VN502HEX1E	VN802HEX1E	VN1002HEX1E	VN1002HEX1E2	
Cooling capacity			4.10(1.30)	6.56(2.06)	8.25(2.32)	8.25(2.32)	
Power supply			1 phase 50Hz 230V (220-240V) / 1 phase 60Hz 220V		1 phase 50Hz 230V(220V-240V)	1 phase 60Hz 220V	
Temperature exchange efficiency	Extra high/High/Low	%	70.5/71.5/72.0	70.5/72.5/73.0	65.5/67.5/68.0	65.5/67.5/68.0	
Enthalpy exchange efficiency (%)	Cooling (Extra high/High/Low)	%	56.5/57.5/58.0	56.0/59.0/59.5	52.0/54.0/55.0	52.0/54.0/55.0	
Power input (Heat exchange mode)	Extra high	kW	0.300/0.365	0.505/0.595	0.550	0.720	
	High	kW	0.280/0.350	0.465/0.555	0.545	0.665	
	Low	kW	0.235/0.250	0.335/0.390	0.485	0.530	
Running current	Extra high	A	1.30/1.65	2.25/2.77	2.46	3.38	
	High	A	1.21/1.62	2.07/2.59	2.43	3.11	
	Low	A	1.01/1.14	1.46/1.79	2.16	2.45	
Fan unit	Standard air flow	Extra high	m³/h	500/-	800/-	950	
		High	m³/h	500/-	800/-	950	
		Low	m³/h	440/410	640/600	820	
	External static pressure	Extra high	Pa	120/200	120/190	135	
		High	Pa	105/170	100/155	120	
		Low	Pa	115/150	100/130	105	
	Air flow limit	Lower limit	m³/h	330	480	640	
		Upper limit	m³/h	600	960	1140	
Sound pressure level	Extra high	dB(A)	37.5/40	41/43	43	43.5	
	High	dB(A)	36.5/38	40/42	42	42	
	Low	dB(A)	34.5/36.5	38/37	40	40	
Sound power level		dB(A)	55	58	59	59	
Appearance							
Dimensions (HxWxD)		mm	430x1140x1690	430x1189x1739	430x1189x1789	430x1189x1789	
Weight		kg	84	100	101	101	
Heat exchanger / Heat-insulating material							
Air filter							
Controller							
Connecting pipe	Gas side / Liquid side	mm	9.5 / 6.4	12.7 / 6.4	12.7 / 6.4	12.7 / 6.4	
	Drain port (nominal dia)	mm	25 (Polyvinyl chloride tube)				
Water supply connection (Port size)			-	-	-	-	
Operating range	Around unit		-10 - 40°C . RH ≤80%				
	Outdoor Air (OA)		-15 - 43°C . RH ≤80%				
	Return Air (RA)		5 - 40°C . RH ≤80%				

*1: Because these models can support only old communication protocol, please communicate with local distributor if you want to connect these indoor units.


Cooling capacities are based on the following conditions:

Cooling capacities are based on: indoor temperature: 27°CDB/19°C WB, Outdoor temperature: 35°C DB

The figures in () indicate the heat reclaimed from the heat recovery ventilator.


AIR-TO-AIR HEAT EXCHANGER WITH DX-COIL

Drawings

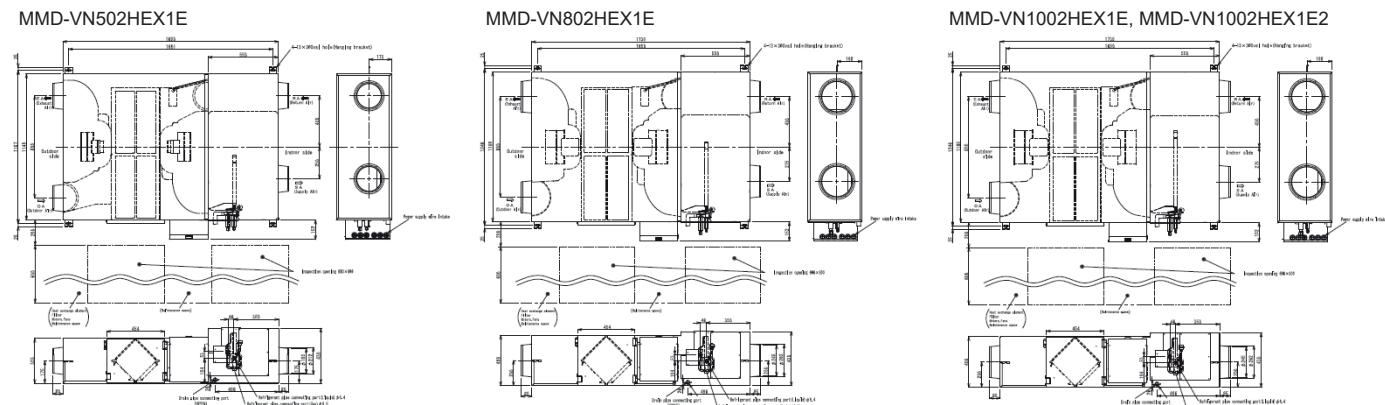

Sound pressure levels

Unit : dB(A)

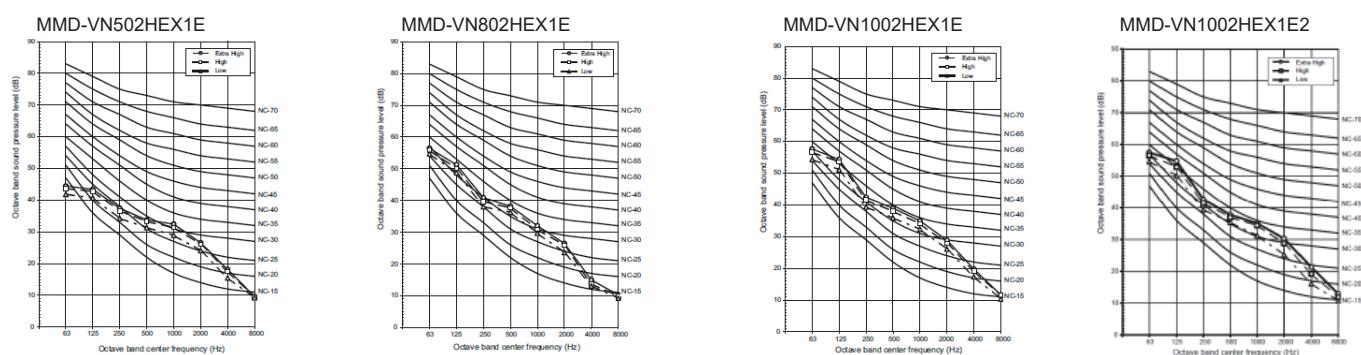

Accessories


Part name	Model name	Description	Appearance	Remarks
Control	NRC-01HE	Dedicated remote controller for air-to-air heat exchanger		Integrated functions : fan speed, freecooling, air balance volume rate, temperature management and timer.
	NRB-1HE	On/off optional PCB for air-to-air heat exchanger		
Condensates	TCB-DP31HEXE	Drain pump kit		

Air-to-air heat exchanger (with DX-coil) connectors

• : Available

CN32	CN60	CN61	CN70	CN73	CN80
Additional ventilation control from remote control	Operation status signal output (Cooling, fan, thermo-on)	External On/Off, operation output and alarm output	Warning symbol on remote control based on signal input.	Forced IDU thermo-off based on signal input	Forced IDU thermo-off and IDU lock based on signal input
-	-	-	•	•	•

Other information

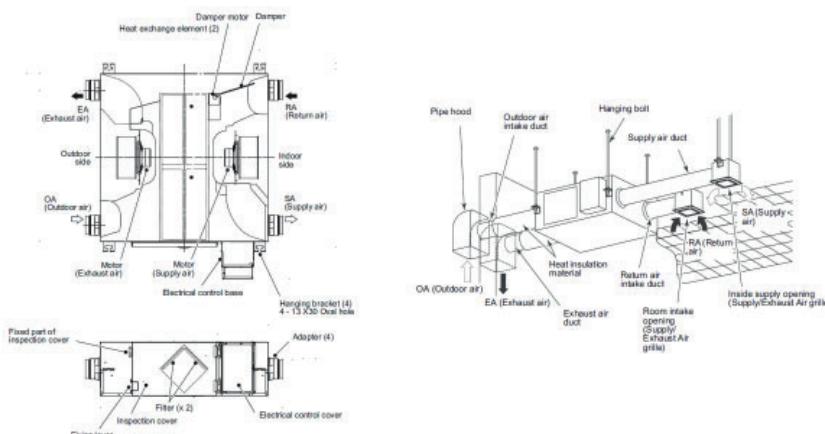

TCB-IFDMX(R)01UP-E/RBM-A_1UPVA-E

DX-COIL INTERFACE ADVANCE

>NEW



Dx-coil interface advance enables to connect SMMS ∞ and third party AHU by TA, DDC or TF control condition.

CAPACITY



8 HP ~ 20HP

LOCAL CONTROLS



RBC-ASCU11-E
RBC-AMTU31-E
RBC-AMSU51-EN/ES


DX coil controller

Model name	TCB-	IFDMX01UP-E (Terminal block without relay)	IFDMR01UP-E (Terminal block with relay)
Power supply	1 phase 50Hz 220-240V / 1 phase 60Hz 208-230V		
Appearance	Zinc hot dipping steel plate		
Dimensions (HxWxD)	mm 420x330x122		
Total weight	kg 4.0		
Controllable operation type	TA, DDC, TF		
Operable ambient condition	°C/RH 5-52 / 10-80		


DX valve kit

Model name	RBM-	A101UPVA-E				A201UPVA-E				
Capacity code	HP	8	10	12	14	16	18	20		
Dimensions (HxWxD)	mm	360x209x80								
Total weight	kg	2.3								


Single combination

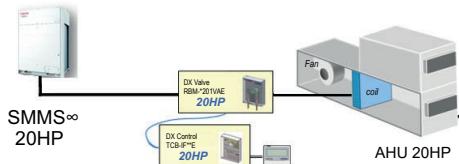

Twin combination


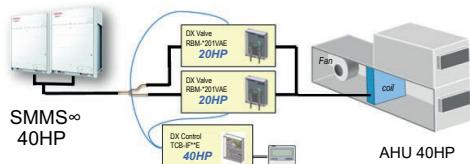


Multi combination

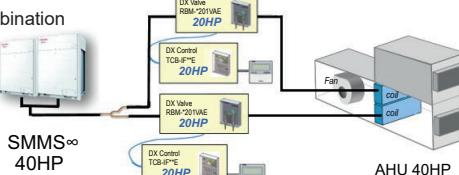


Drawings


TCB-IFDMX01UP-E
TCB-IFDMR01UP-E

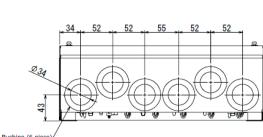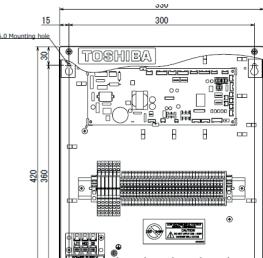

RBM-A101UPVA-E
RBM-A201UPVA-E

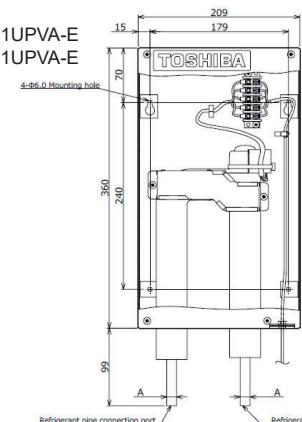

Refrigerant pipe connection port (Liquid pipe / Outdoor unit side)
Refrigerant pipe connection port (Liquid pipe / Air Handling unit side)



Model	A (P)ipe
RBM-A101UPVA-E	φ 12.7
RBM-A201UPVA-E	φ 15.88

DX-COIL INTERFACE ADVANCE

IDU

Type of AHU Dx-coil	Normal	Interfaced, Split face							
Appearance of AHU Dx-coil							
Dx-coil number	1	1	2	3	4	5	6	2	3
Dx's combination	Single	Twin	Single multi (2)	Single multi (3)	Single multi (4)	Single multi (5)	Single multi (6)	Double Twin	Triple Twin
Dx-controller No.	1	1	2	3	4	5	6	2	3
Dx-valve kit No.	1	2	2	3	4	5	6	4	6
Dx-valve kit Combination [HP]	8	8							
10	10								
12	12								
14	14								
16	16	8+8	8+8						
18	18		10+8						
20	20	10+10	10+10						
22			12+10						
24		12+12	12+12	8+8+8					
26				10+8+8					
28		14+14	14+14	10+10+8					
30			16+14	10+10+10					
32		16+16	16+16	12+10+10	8+8+8+8		(8+8)+(8+8)		
34			18+16	12+12+10	10+8+8+8				
36		18+18	18+18	12+12+12	10+10+8+8				
38			20+18		10+10+10+8				
40		20+20	20+20		10+10+10+10	8+8+8+8+8	(10+10)+(10+10)		
42				14+14+14	12+10+10+10	10+8+8+8+8			
44				16+14+14	12+12+10+10	10+10+8+8+8			
46				16+16+14	12+12+12+10	10+10+10+8+8			
48				16+16+16	12+12+12+12	10+10+10+10+8	8+8+8+8+8+8	(12+12)+(12+12)	(8+8)+(8+8)+(8+8)
50				18+16+16		10+10+10+10+10	10+8+8+8+8		
52				18+18+16		12+10+10+10+10	10+10+8+8+8		
54				18+18+18		12+12+10+10+10	10+10+10+8+8		
56				20+18+18	14+14+14+14	12+12+12+10+10	10+10+10+10+8+8	(14+14)+(14+14)	
58				20+20+18	16+14+14+14	12+12+12+12+10	10+10+10+10+10+8		
60				20+20+20	16+16+14+14	12+12+12+12+12	10+10+10+10+10+10		(10+10)+(10+10)+(10+10)
62					16+16+16+14		12+10+10+10+10+10		
64					16+16+16+16		12+12+12+10+10+10	(16+16)+(16+16)	
66					18+16+16+16		12+12+12+12+10+10		
68					18+18+16+16		12+12+12+12+10+10		
70					18+18+18+16	14+14+14+14+14	12+12+12+12+12+10		
72					18+18+18+18	16+14+14+14+14	12+12+12+12+12+12	(18+18)+(18+18)	(12+12)+(12+12)+(12+12)
74					20+18+18+18	16+16+14+14+14			
76					20+20+18+18	16+16+16+14+14			
78					20+20+20+18	16+16+16+16+14			
80					20+20+20+20	16+16+16+16+16		(20+20)+(20+20)	
82						18+16+16+16+16			
84						18+18+16+16+16	14+14+14+14+14+14		(14+14)+(14+14)+(14+14)
86						18+18+18+16+16	16+14+14+14+14+14		
88						18+18+18+18+16	16+16+14+14+14+14		
90						18+18+18+18+18	16+16+16+14+14+14		
92						20+18+18+18+18	16+16+16+16+14+14		
94						20+20+18+18+18	16+16+16+16+16+14		
96						20+20+20+18+18	16+16+16+16+16+16		(16+16)+(16+16)+(16+16)
98						20+20+20+20+18	18+16+16+16+16+16		
100						20+20+20+20+20	18+16+16+16+16+16		
102							18+18+18+16+16+16		
104							18+18+18+18+16+16		
106							18+18+18+18+18+16		
108							18+18+18+18+18+18		(18+18)+(18+18)+(18+18)
110							20+18+18+18+18+18		
112							20+20+18+18+18+18		
114							20+20+20+18+18+18		
116							20+20+20+20+18+18		
118							20+20+20+20+20+18		
120							20+20+20+20+20+20		(20+20)+(20+20)+(20+20)

* Please refer to the guideline of Dx-coil interface advance for other combination of DX coil controller and DX valve kit.

VN-M_HE

AIR-TO-AIR HEAT EXCHANGER



Toshiba's VN model uses exhaust air to pre-condition the incoming air, thus reducing the cooling load on the system. This allows the overall capacity size of the system to be reduced.

AIR FLOW



SOUND PRESSURE LEVEL

150m³/h ~ 2.000m³/h

20 dB(A)

LOCAL CONTROLS

NRC-01HE
RBC-AMTU31E

Features

Model name		VN-M150HE	VN-M250HE	VN-M350HE	VN-M500HE	VN-M650HE	VN-M800HE	VN-M1000HE	VN-M1500HE	VN-M2000HE						
Air volume (Extra high/High/Low)		m ³ /h	150/150/110	250/250/155	350/350/210	500/500/390	650/650/520	800/800/700	1000/1000/755	1500/1500/1200	2000/2000/1400					
Power consumption	Extra high	W	68-78	123-138	165-182	214-238	262-290	360-383	532-569	751-786	1084-1154					
	High	W	59-67	99-111	135-145	176-192	240-258	339-353	494-538	708-784	1032-1080					
	Low	W	42-47	52-69	82-88	128-142	178-191	286-300	353-370	570-607	702-742					
External static pressure	Extra high	Pa	82-102	80-98	114-125	134-150	91-107	142-158	130-150	135-156	124-143					
	High	Pa	52-78	34-65	56-83	69-99	58-82	102-132	97-122	103-129	92-116					
	Low	Pa	47-64	28-40	65-94	62-92	61-96	76-112	84-127	112-142	110-143					
Sound pressure level	Extra high	dB(A)	26-28	29.5-30	34-35	32.5-34	34-36	37-38.5	39.5-40.5	38-39	41-42.5					
	High	dB(A)	24-25.5	25-27	30-32	29.5-31	33-34	35.5-37	38.5-40	36.5-37.5	39.5-41					
	Low	dB(A)	20-22	21-22	27-29	26-29	31-32.5	33.5-35	34-35.5	36-37.5	37-38					
Temperature exchange efficiency (%)	Extra high		81.5	78	74.5	76.5	75	76.5	73.5	76.5	73.5					
	High		81.5	78	74.5	76.5	75	76.5	73.5	76.5	73.5					
	Low		83	81.5	79.5	78	76.5	77.5	77	79	77.5					
Enthalpy exchange efficiency (%)	Extra high	Heating	74.5	70	65	72	69.5	71	68.5	71	68.5					
	High	Heating	74.5	70	65	72	69.5	71	68.5	71	68.5					
	Low	Heating	76	74	71.5	73.5	71.5	71.5	71.5	73.5	72					
	Extra high	Cooling	69.5	65	60.5	64.5	61.5	64	60.5	64	60.5					
	High	Cooling	69.5	65	60.5	64.5	61.5	64	60.5	64	60.5					
	Low	Cooling	71	69	67	66.5	64	65.5	64.5	67	65.5					
Power supply		1 phase 50Hz 230V (220-240V) / 1 phase 60Hz 220V														
Dimensions (HxWxD)		mm	900x900x290			1140x1140x350		1189x1189x400		1189x1189x810						
Weight		kg	36	36	38	53	53	70	70	143	143					
Duct diameter		mm	100	150		200		250		Inside: 250 / Outside: 283x730						
Filtration efficiency grade (%)		82														
Operating range	Around unit	-10°C-40°C 80%RH or less														
	Outdoor Air (OA)	-15°C(*1)-43°C 80%RH or less														
	Return Air (RA)	5°C-40°C 80%RH or less														

*1: Because these models can support only old communication protocol, please communicate with local distributor if you want to connect these indoor units.

* Air volume can be changed over to high (Extra high) mode or low mode at both heat exchange and normal ventilation modes.

* Sound pressure level is measured 1.5 m below the center of the unit, and the value was measured at the acoustic room.

* Sound pressure levels usually become higher than above values by the influence of actual installation condition such as reflected sound and peripheral noise.


* Sound power level is the value of casing.

*1) When the temperature of the outdoor air is below -10°C, the unit runs cold operation mode (intermittent operation of the ventilation for air supply).


The unit cannot be used at -15°C or less. The ventilator for air supply stops, and the ventilator for air exhaust also can be stopped by the setting.

Drawings


VN-M150HE to VN-M350HE

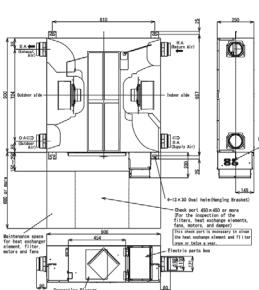


VN-M500HE to VN-M650HE

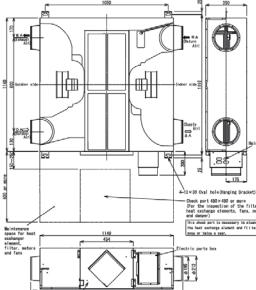

VN-M800HE to VN-M1000HE1

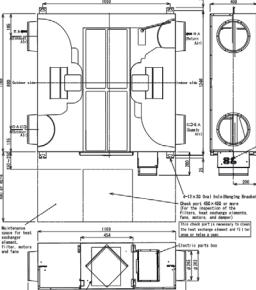

VN-M1500HE1 to VN-M2000HE1

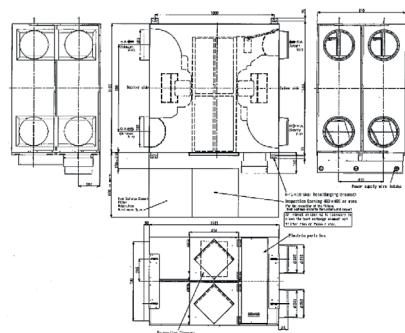


Unit : mm

AIR-TO-AIR HEAT EXCHANGER


Sound pressure levels

Unit : dB(A)


VN-M150HE

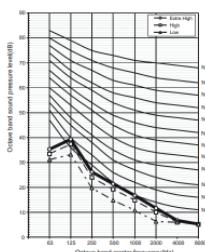


VN-M250HE

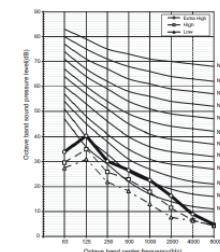


VN-M350HE

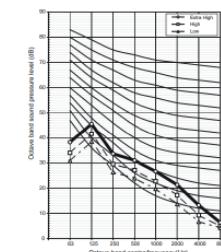


VN-M500HE

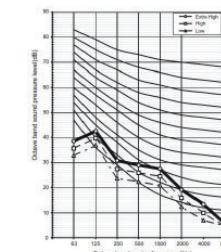


VN-M650HE

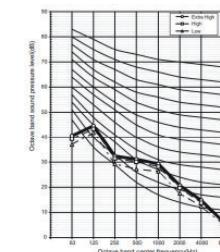


VN-M800HE

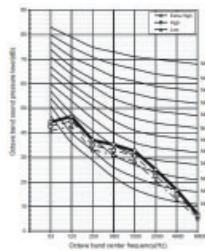


VN-M1000HE

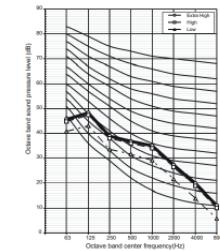

VN-M1500HE

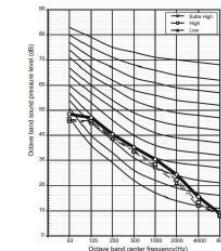


VN-M2000HE

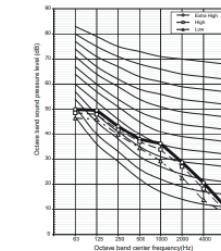

Accessories

Part name	Model name	Description	Appearance	Remarks
Control	NRC-01HE	All air-to-air heat exchangers dedicated remote control		Integrated functions : fan speed, freecooling, air balance volume rate, temperature management and timer.
	NRB-1HE	All air-to-air heat exchangers On/Off additional PCB		On/off optional PCB for air-to-air heat exchanger

Other information

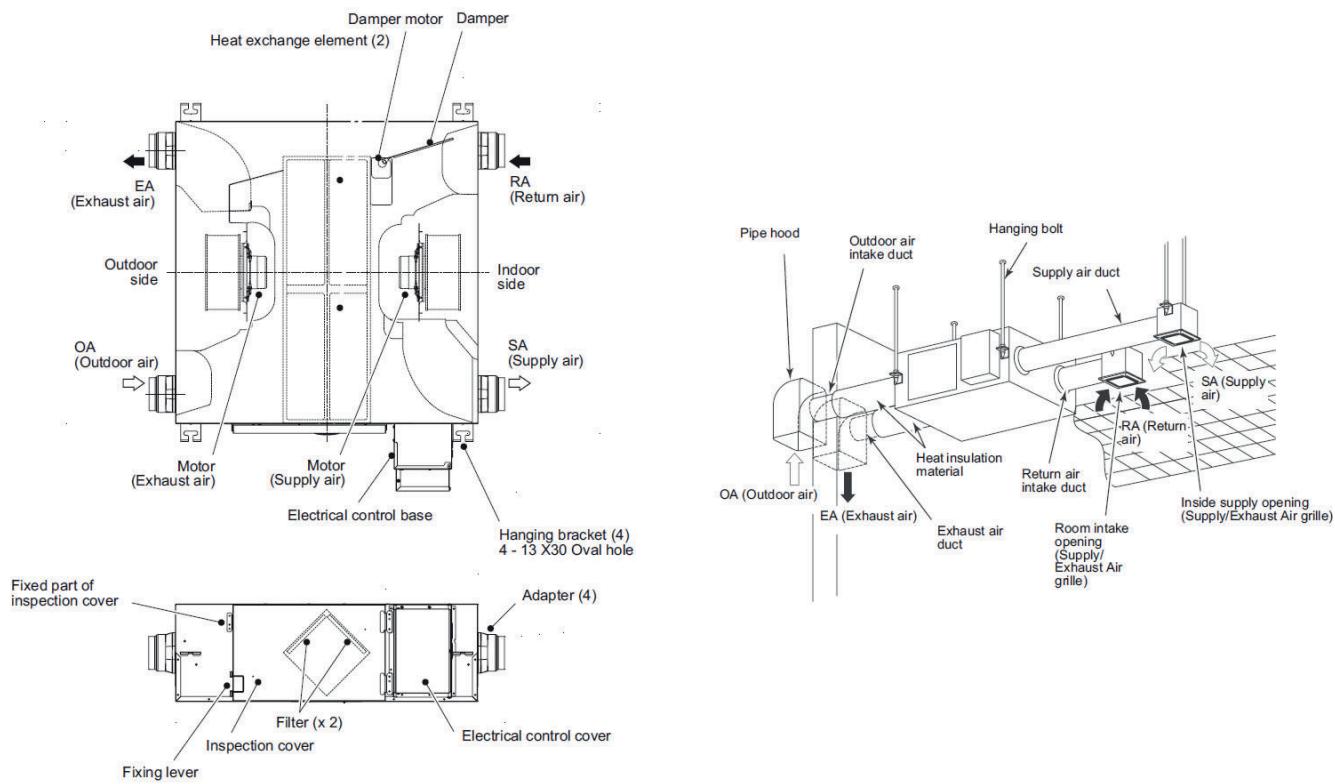

WIRELESS SOLUTIONS KEEP CONTROL



In addition to the high quality of the air conditioners, the controls also play a significant part in the ease-of-use and efficiency of the units. Optimized settings create the perfect climate. As well as local control options, Toshiba also offers a broad selection of central control systems or the option to integrate these in the building control system.

› ONE CONTROL FOR EVERY USAGE



Local controls

Cable remote controls (max. cable length 500 m) or wireless infrared remote controls are used to control individual units or groups of up to 8 indoor units. Additional modules allow units to be controlled from any location via apps or the Internet.



Central controls


VRF systems can be controlled from a preferred central location, such as the reception or plant room. Cable lengths can be max. 2,000 m and up to 512 indoor units can be controlled.



Building control systems

Toshiba air conditioners can be interlinked with all conventional building control systems. This makes air conditioning an integral part of the central control of a building.

› WHEREVER YOU ARE

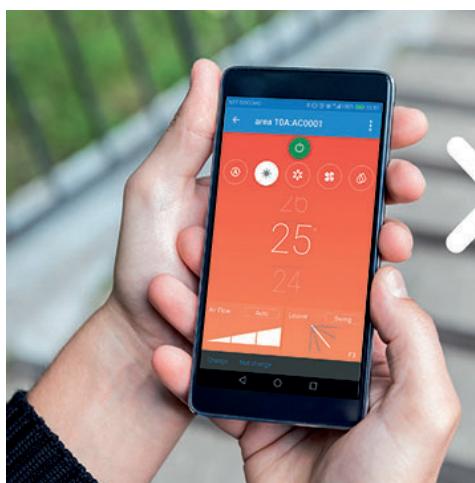

On the cloud with Toshiba AC control app



Locally with standard remote control



Using Toshiba WebBrowser for all your facilities

› TRUST TOSHIBA TU2C-LINK

All control devices are connected to the air conditioner side using Toshiba's dedicated central control network, also called the TU2C-LINK. It can be used to directly connect all equipment.

Wiring: 2-core, non-polarity

Type: Shield wire

Size/length:

• 1 to 1.5 mm² / Up to 1,000 m


• 2 mm² / Up to 2,000 m

INDIVIDUAL REMOTE CONTROLLER


TYPE		INFRARED								WIRED			
Part number		RBC-AXU31-E	RBC-AXU41U-E	RBC-AXU31U-E	RBC-AXU33UP-E	RBC-AXU31UM-E	RBC-AXU31UW-E	RBC-AX33UVP-E	RBC-AXU31C-E	RBC-ASCU11-E	RBC-AMTU31-E	RBC-AMSU1-ENES	NRC-01HE
Picture													
Dimensions (HxWxD) in mm	Remote	157x56x19	157x56x19	157x56x19	157x56x19	157x56x19	157x56x19	157x56x19	157x56x19	86x86x16	120x120x16	120x120x20	120x120x16
Infrared receiver		120x70x18	204x204x24	163x163x24	204x204x24	163x163x24	71x162x39	140x113x12	130x65				
Compatibility	All indoor units	4 way cassette high performance	4 way cassette	4 way cassette	Compact 4 way cassette	2 way cassette	1 way cassette	Ceiling	All indoor units	All indoor units	All indoor units	Air to air heat exchanger	
Connectivity	1:1	1:1	1:1	1:1	1:1	1:1	1:1	1:1	1:16	1:16	1:16	1:16	1:8
Standard functions	On/Off	•	•	•	•	•	•	•	•	•	•	•	•
	Mode (heat, cool, ventilation,dry, auto)	•	•	•	•	•	•	•	•	•	•	•	•
	Temperature setting	•/17°C-30°C	•/17°C-30°C	•/17°C-30°C	•/17°C-30°C	•/17°C-30°C	•/17°C-30°C	•/17°C-30°C	•/18°C-29°C	•/18°C-29°C	•/18°C-29°C	•/18°C-29°C	•/18°C-29°C
	Fan speed (auto, manual 5 speed)	•	•	•	•	•	•	•	•	•	•	•	
	Air direction (swing mode or manual orientation)	•	•	•	•	•	•	•	•	•	•	•	
Scheduling	Timer function	•	•	•	•	•	•	•	•	•	•	•	•
	Schedule function											•	
	Return back											•	
Advanced functions	Dual set point												•
	Soft cooling												•
	Night operation												•
	Energy save function										•	•	•
	Frost protection										•	•	•
	Lock function												•
	Summer time												•
Installation & maintenance	Room naming												•
	Filter dirty indication									•	•	•	
	Error display	•	•	•	•	•	•	•	•	•	•	•	•
	System settings									•	•	•	
Outputs	Indoor unit serial number												•
	Error output									•	•	•	•
	External ventilation control									•	•	•	
Display & Interface	Interface	Icon	Icon	Icon	Icon	Icon	Icon	Icon	Icon	Icon	Icon	Menu	Icon
	Multilanguage												•
	Luminous buttons												•
	Backlight display												•
Other	Temperature sensor									•	•	•	•
Communication protocol										TU2C-LINK	TU2C-LINK	TU2C-LINK	TCC-LINK

Installation drawings


Individual controls

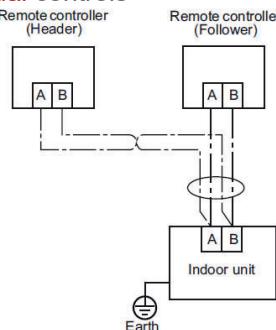

Group controls

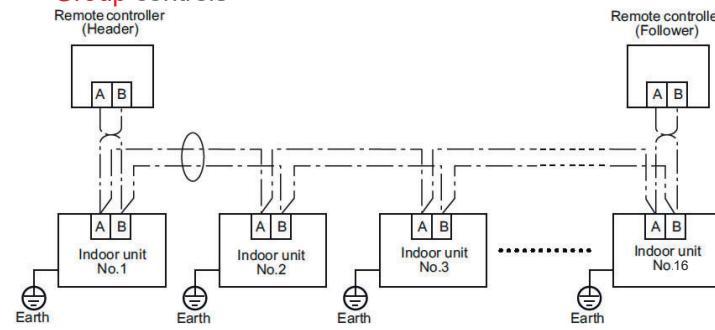



TYPE		WIRED	
Part number		TCB-SC640U-E	
Picture			
Dimensions (HxWxD) in mm		120x120x16	
Compatibility		all systems	
Connectivity		1:64	
Standard functions	On/Off	•	
	Mode (heat, cool, ventilation, dry, auto)	•	
	Temperature setting	•	
	Fan speed (auto, manual 5 speed)	•	
	Air direction (swing mode or manual orientation)	•	
Scheduling	Timer function	•	
	Schedule fonction	•	
	Return back	•	
Advanced functions	Dual set point	•	
	Soft cooling	•	
	Energy save function		
	Energy monitoring	• (If power meter,BMS-IFWH5E interface relay needed)	
Central control	Permit/prohibit function	•	
	Group control	•	
Installation & maintenance	Filter dirty indication	•	
	Error display	•	
	Error transfer by Email	•	
	System settings	• V	
Display & Interface	Interface	Menu	
	Multilanguage	•	
	Luminous buttons	•	
	Backlight display	•	
Other	Digital Input/output	• (BMS-IFDD03E interface needed)	
	Web connection	•	
Communication protocol		TU2C-LINK	
		TCC-LINK	

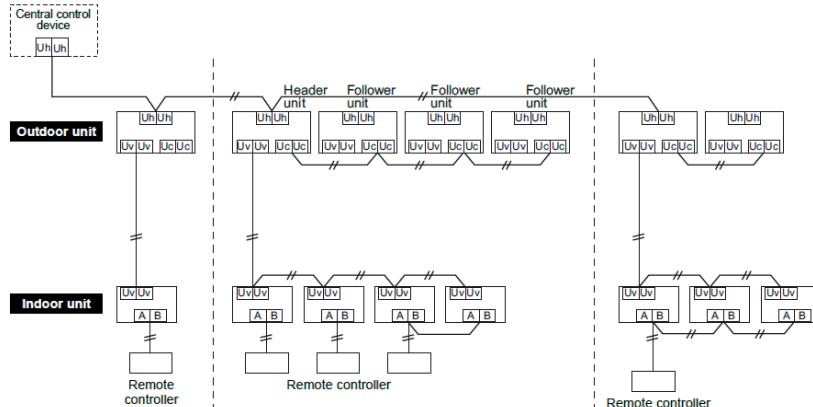Drawings**Focus on Web Browser**

The Smart Manager can be remotely connected via a computer and all functions can be controlled via web browser:
 Standard operation - Advanced scheduling - Dual set point management - Up to 64 zones - Permit/Prohibit function - Energy saving - Return back

**Focus on Data Analyzer**


With or without power meter, the Data Analyzer software allows facility manager to manage system energy consumption. Through graphics on different periods, different indoor units, different energy consumption zones can be compared to optimize global efficiency. Set point, ambient temperature and outdoor temperature are monitored.



CLOUD SOLUTION

Part number	BMS-IWF0320E - Smart Device control interface	
App name	Toshiba AC control	
Picture		
Dimensions (HxWxD) in mm	140x90x45	
Compatibility	All indoor units (except hot water module, DX kit, fresh air, A2A heat exchanger)	
Connectivity	1:32	
Standard functions	On/Off	•
	Mode (heat, cool, ventilation, dry, auto)	•
	Temperature setting	•
	Fan speed (auto, manual 5 speed)	•
	Air direction (swing mode or manual orientation)	•
Scheduling	Timer function	•
	Schedule function	•
	Return back	•
Advanced functions	Energy save function	•
	Eco temperature shift	•
	Soft cooling	•
	Customize room/floor/building name	•
Central control	Permit/prohibit function	•
	Group control	•
Display & Interface	Interface	App
	Multilanguage	•
	App compatibility	Android & iOS
	Devices compatibility	Smartphone and Phablet
Installation & maintenance	Filter dirty indication	•
	Error display	•
	Error transfer by Email	•
Users	User access	Login & Password
	Max user	1 admin / 32 users
Communication protocol	TCC-LINK	

Drawings

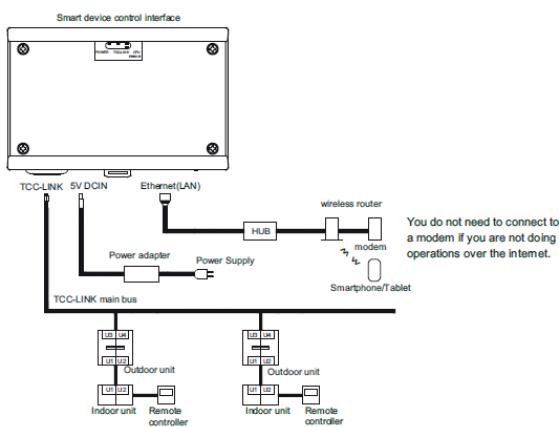

Level function	Administrator	User
Air conditioner's display	•	*1
Air conditioner's settings	•	*1, *2
Users settings	•	-
Alarm	•	-*3
Schedule	•	-
Air conditioner's various settings	•	-*4
Clock settings	• (via intranet acces only)	-
Operation mode restriction	• (via intranet acces only)	-

*1:Only the air conditioners in the "Access Area" can be displayed.

*2:If the locking setting is enabled, you cannot do any settings.

*3:The alarm settings for "Access Area" can only be displayed.

*4:The settings can only be displayed.

Toshiba AC control



Designed for commercial applications, the Toshiba AC Control App is your one-stop solution for managing up to 32 indoor units via an Android or iOS smartphone, with all main functions accessible in a single touch.




TOUCH SCREEN SOLUTIONS


Part number	Touch Screen Smart Manager	BMS-CT2560U-E	BMS-CT5121E
Picture	 		
Dimensions (HxWxD) in mm	205x136x90	255x323x49	
Compatibility	All indoor units (except hot water module, DX kit, fresh air, A2A heat exchanger)	All indoor units. TCS-NET relay interface needed (BMS-IFLSV4E)	
Connectivity	1:256	1:512	
Screen	Type / Dimension	Capacitive color touch screen / 7"	Capacitive color touch screen / 12.1"
Standard functions	On/Off	•	•
	Mode (heat, cool, ventilation, dry, auto)	•	•
	Temperature setting	•	•
	Fan speed (auto, manual 5 speed)	•	•
	Air direction (swing mode or manual orientation)	•	•
Scheduling	Timer function	•	•
	Schedule function	•	•
	Return back	•	•
Advanced functions	Dual set point	•	•
	Soft cooling	•	•
	Energy save function	•	•
	Energy monitoring	•	• (If power meter,BMS-IFWH5E interface relay needed)
	Rooms naming		
Central control	Permit/prohibit function		
	Group control	•	•
Installation & maintenance	Filter dirty indication	•	•
	Error display	•	•
	Error transfer by Email	•	•
	System settings	•	•
Outputs	Digital Input/output	•	• (Digital I/O BMS-IFDD03E needed)
	Web connection	•	•
Display & Interface	Interface	Menu	Menu
	Multilanguage	•	•
	Backlight display	•	•
Communication protocol	TU2C-LINK	TCC-LINK	

Installation drawings

BMS-CT2560U-E

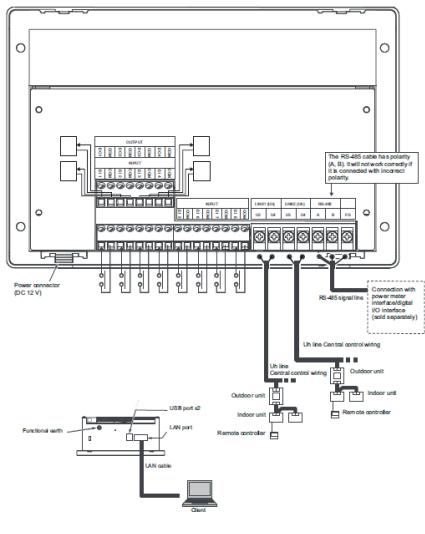

BMS-CT5121E

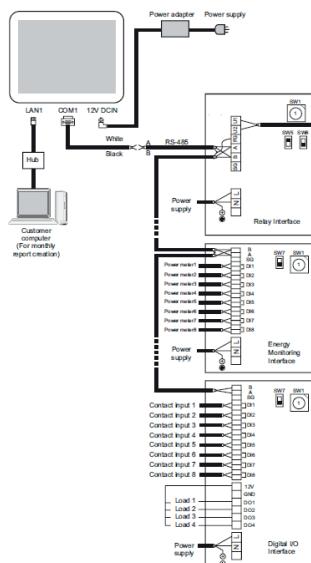

ADDITIONAL PCB

Additional PCB for outdoor units

Model name	Power peak-cut control board			External master ON/OFF control board			Output control board		
									
	TCB-PCDM4E			TCB-PCM04E			TCB-PCIN4E		
System	SMMSu/ SMMS-7/SMMS ∞	SHRMe	Mini SMMSe	SMMSu/ SMMS-7/SMMS ∞	SHRMe	Mini SMMSe	SMMSu/ SMMS-7/SMMS ∞	SHRMe	Mini SMMSe
Power peak cut control	•	•	•						
Power peak cut extend	•	•	•						
Snowfall fan control					•	•			
External master ON/OFF control					•	•			
Night operation (Sound reduction) control					•	•			
Operation mode selection control					•	•			
Error/Operation output control							•	•	•
Compressor operation output							•	•	•
Operation rate display							•	•	•
Max number installed	1	1	1	4	4	2	2	2	1
Kind of digital input / output	2/1			6/-			-8		


Additional PCB for Indoor units

Optional connection kit TCB-PCUC2-E

SIGNAL

OUTPUT TERMINAL TB1


Signal outputs (Mode, fans status, alarm, defrost,...) are extracted from "OUT1", "OUT2", and "OUT3".

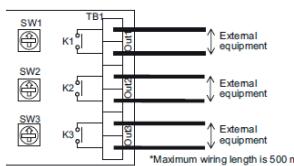

EXTERNAL

DIGITAL INPUT TERMINAL TB2


Stop air conditioner or lock local remote by inputting signal.

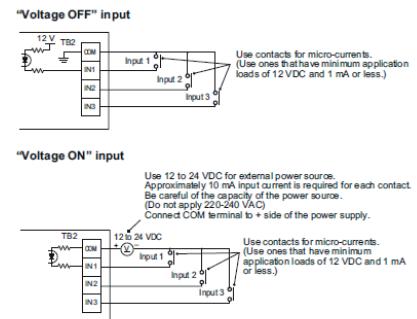

EXTERNAL


ANALOG INPUT TERMINAL TB3

Change the indoor unit's operation mode (AN1), set temperature (AN2), and blower setting (AN3) by connecting a variable resistor to the analog input terminal.

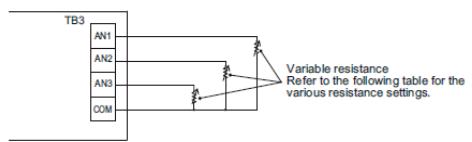

Multi tenant kit TCB-PSMT1E

For multi tenant application, this PCB maintain low voltage power during tenant absence when main power supply for the IDU is shut down.

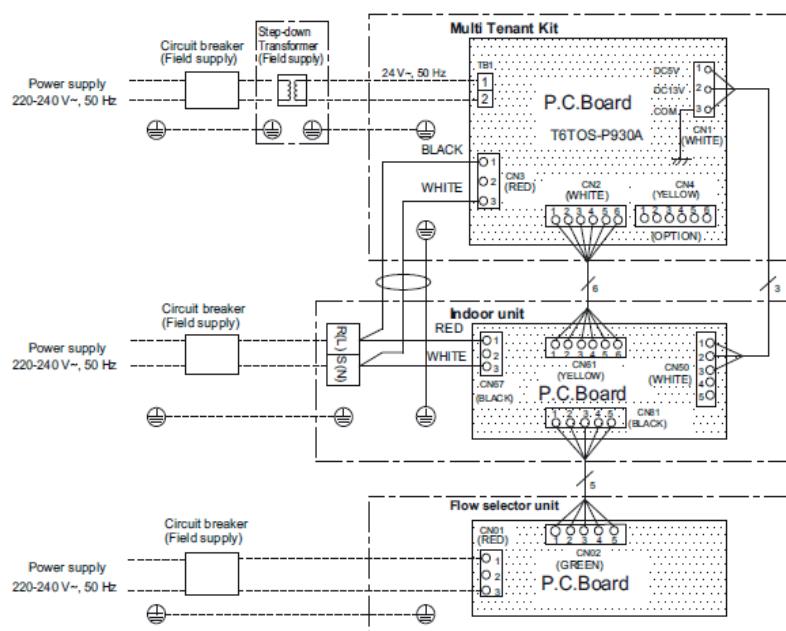

Features

Part number	BMS-IFMB1280U-E	TCB-IFLN642TLE	BMS-IFBN1280U-E	TCB-IFCB640TLE
Langage	Modbus ®	LONWORKS ®	BACnet ®	Analogue and digital inputs
Picture				
Dimensions (HxWxD) in mm	170x200x66	193x246x66	90x140x45	66x170x200
Compatibility	All indoor units (HWM, A2A heat exchanger excluded)	All indoor units (HWM, A2A heat exchanger excluded)	All indoor units (HWM excluded)	All indoor units
Connectivity	Max number of indoor units	128	64	128
	Max number of outdoor units	16	16	
	Max number of gateways	15	10	1
Command	On/Off	R/W	R/W	R/W
	Accumulated operation time	R/W		
	Mode (heat, cool, ventilation, dry, auto)	R/W	R/W	R/W
	Temperature setting	R/W	R/W	R/W
	Fan speed (auto, manual 5 speed)	R/W	R/W	R/W
	Air direction (swing mode or manual orientation)	R/W	R/W	R/W
	Soft cooling			
	Save operation			
	Filter dirty indication	R/W	R/W	R/W
	Room temperature	R	R	R
	Permit/Prohibit of local operation	R/W	R/W	R/W
	Temperature setting range limitation	R/W		
	Error status	R	R	R
	Error code	R	R	
	Error address			
	Model name	R		
	Serial number	R		
	Indoor unit capacity	R		
	Indoor unit type	R		
Protocol	Modbus RTU	LonTalk communication	Bacnet IP	Voltage signal
Infrastructure	RS-485	Twisted pair shield cable	LAN cable (higher than Category 5, UTP)	
Requirements (Locally supplied)	Modbus master device	Lonworks control system		
	Modbus master device	Lonworks Network Card for PC Control		
Toshiba communication protocol	TU2C-LINK	TCC-LINK	TU2C-LINK	TCC-LINK

BUSINESS / CONTROL SUMMARY

Controls

Model number	Reference	TCC-LINK	TU2C-LINK	Description	Used with
BMS-CT256U-E	7" Touch Screen Controller	x	x	Enables full control of up to 256 indoor units	
BMS-CT512E	12" Touch Screen Controller	x		Enables full control of up to 512 indoor units with electric billing, ML	
BMS-IFBN1280U-E	BN Interface	x	x	BACnet Interface for LC & VRF	Enables integration with BACnet
BMS-IFDD03E	Digital I/O relay interface	x		Digital I/O relay interface	Touch screen controller, Compliant manager, Web based controller, Smart Manager
BMS-IFKX0TLR-E	1:1 KNX interface	x		Connect the system to a KNX Building Management System	Remote Control wiring
BMS-IFLSV4E	TCS-Net Relay Interface	x		Relay for integration to TCS-Net	Bacnet gateway, Touch-screens & Web based controller
BMS-IFMB0TLR-E	1:1 Modbus interface	x		Connect the system to a Modbus Building Management System	Remote Control wiring
BMS-IFWH5E	Energy monitoring relay interface	x		Energy monitoring relay interface	Touch screen controller, Compliant manager, Web based controller, Smart Manager
BMS-IWF0320E	Smart Device Control Interface	x		Enables full control of up to 32 indoor units by usin Toshiba AC app (Smart phone & Tablet)	
BMS-SM1281ETLE	Smart BMS Manager with data analyzer	x		Enables full control of up to 128 indoor units with Energy Monitoring and Advanced Control Options.	Network 1:1 model connection interface required for DI/SDI (Excluding high-wall type)
NRB-1HE	Remote ON/OFF adapter	x		Allows ON/OFF control	All Air-to-air heat exchangers
NRC-01HE	Wired Remote Controller	x		Air-to-air heat exchanger remote controller, including with DX coil and humidifiers models	Air-to-air heat exchangers and Air-to-air heat exchangers with DX coil
RBC-AMS41E	Remote controller with schedule timer	x		Indoor unit operation with schedule timer (7-days) allowing to program 8 functions/day + clock display	
RBC-AMSU51-EN/ES	Design remote Controller with schedule timer	x	x	Multi-Language LCD display, a built-in 7-Day timer, Energy Saving options and return back function,Dual set points, and Soft cooling. EN = English, Italian, Polish, Greek, Russian, Turkish. ES = English, Spanish, Portuguese, French, Dutch, German	
RBC-AMTU31-E	Wired Remote Controller	x	x	Main wired remote controller	
RBC-AMT32-E	Wired Remote Controller	x		Main wired remote controller	
RBC-AS41E	Simplified Wired Remote Controller	x		Dedicated for hotel and domestic applications	
RBC-AXU31C-E	Infra-red Remote Kit	x	x	Wireless remote controller	All ceiling units
RBC-AXU31U-E	Wireless remote unit kit	x	x	Wireless remote unit kit for 4-way cassette	4 way cassette series 1 & RBC-U32PGP-E
RBC-AXU33UP-E	Wireless remote unit kit	x	x	Wireless remote unit kit for 4-way cassette	4 way cassette series 1 & RBC-U33P-E
RBC-AX33UYP-E	Wireless remote kit	x	x	Wireless remote kit for YHP 1-way cassette	
RBC-AXU31-E	Infra-red Remote Kit	x	x	Wireless remote controller	All units
TCB-IFCB-4E2	Remote location On/Off Control Box	x		Enables remote location On/Off control	
TCB-IFCB5-PE	Window Switch & Remote on/off	x		Ensure the indoor unit not operate when outside window is open or for Door Entry systems	
TCB-IFCB640TLE	Analog interface	x		Control & monitoring up to 64 IU on TCC-link	Combination with TCB-IFCG1TLE
TCB-IFCG1TLE	General purpose interface	x		Enables control of A/C by the DI/DO and AI/AO	Combination with TCB-IFCB640TLE
TCB-IFLN642TLE	LN interface	x		Allows control of 64 indoor units from a Lonworks based BMS	
BMS-IFMB1280U-E	Modbus interface box	x	x	Connect the system to a Modbus Building Management System	
TCB-KBCN32VEE	Connectors	x		For CN32	
TCB-KBCN60OPE	Connectors	x		For CN60	
TCB-KBCN61HAE	Connectors	x		For CN61	
TCB-KBCN70OAE	Connectors	x		For CN70	
TCB-KBCN73DEE	Connectors	x		For CN73	
TCB-KBCN80EXE	Connectors	x		For CN80	
TCB-PCDM4E	Application Control PC Board	x		Power Peak Cut Control	
TCB-PCIN4E	Application Control PC Board	x		Error/Individual compressor Operation Output Control Board	
TCB-PCMO4E	Application Control PC Board	x		External Master ON/OFF Control Board	
TCB-PCUC2E	Optionnal connection kit	x			
TCB-PSMT1E	Optionnal connection kit	x		Multi-Tenant Kit for VRF Systems	SMMS-u, SMMS~, SMMS-e, SHRM-e and Mini-SMMS Indoor Units (refer to I/M for more details of connectable Indoor units)
TCB-PX100-PE	Enclosure for the Window Switch / Remote On/Off	x		For use when the Window Switch / Remote On/Off Accessory cannot fit within the AC unit, eg. High Walls	For use with TCB-IFCB5-PE
TCB-PX30MUE	E-Box Extension Enclosure	x		For 1:1 Model connection I/F and Window Switch / Remote On/Off PCB	4-Way Cassettes only & TCB-IFCB5-PE
TCB-PX40MUE	E-Box Extension Enclosure	x		For 1:1 Model connection I/F and Window Switch / Remote On/Off PCB	4-Way Compact Cassettes only & TCB-IFCB5-PE
TCB-SC640U-E	Centralized remote contolle	x	x	Up to 64 indoor units	
TCB-TC41U-E	Remote temperature sensor	x	x	Remote temperature sensor for cassette & duct	
RBC-ASC11U-E	Wired Remote Controller	x	x	Main wired remote controller	
RBC-ASC11-E	Wired Remote Controller	x		Main wired remote controller	

Indoor units accessories

Indoor unit type	Parts name	Model name	Applied model	Notes	Remarks
4-way cassette high performance	Ceiling Panel	RBC-U41PG(W)-E	MMU-UP_1H-E	Required accessory	
	Wireless remote controller	RBC-AXU41U-E		For Installing on panel	
	Wireless remote controller	RBC-AXU31-E		For installing as stand alone	
	Fresh air chamber	TCB-GFC1603UE			
	Spacer for height adjustment	TCB-SP1603UE			
	Air discharge direction kit	TCB-BC1603UE			
4-way cassette	Ceiling Panel(Wide-flow louver)	RBC-U32PGP-T	MMU-UP_1HP-T	Required accessory	
	Ceiling panel (Smart design)	RBC-U33P-T		Required accessory	
	Wireless remote controller	RBC-AXU31U-E		For Installing on panel	Use with RBC-U32PGP-E
	Wireless remote controller	RBC-AXU31-E		For installing as stand alone	
	Fresh air chamber	TCB-GFC1602UE			Use with TCB-GB1602UE
	Fresh air inlet box	TCB-GB1602UE		For fresh air intake by using the knockout hole of Fresh air and filter chamber. (dia.=100 mm)	Use with TCB-GFC1602UE
	Auxiliary fresh air flange	TCB-FF101URE2		For easy fresh air intake by using the knockout hole of indoor unit. (dia.=100mm)	
	Spacer for height adjustment	TCB-SP1602UE		Height 50 mm	
	Air discharge direction kit	TCB-BC1602UE		Air direction change by cutting off air discharge port (3 pcs.)	
	PM2.5 filter	TCB-PLFC1UPE-120		Before Pre-Filter type	
		TCB-PLFC2UPE-80		After Pre-Filter type	
	Wireless remote controller	RBC-AXU33UP-E		*New product and coming soon	Use with RBC-U33P-E
	Occupancy sensor	TCB-SIR33UP-E		*New product and coming soon	Use with RBC-U33P-E
	Air purifier kit	TCB-EAPC1UCP-E		*New product and coming soon	Use with RBC-U33P-E
Compact 4-way cassette	Standard panel	RBC-UM21PG(W)-E	MMU-UP_1MH-E	Required accessory	
	Motion Sensor	TCB-SIR41UM-E			Wireless remote controller kit (RBC-AX32UM(W)-E) and Occupancy sensor cannot be used on the same indoor unit.
2-way cassette	Standard panel	RBC-UW283PG(W)-E	MMU-UP0071 to 0151WH-E	Required accessory	
		RBC-UW803PG(W)-E	MMU-UP0181 to 0301WH-E		
		RBC-UW1403PG(W)-E	MMU-UP0361 to 0561WH-E		
	Auxiliary fresh air flange	TCB-FF151US-E	MMU-UP_1WH-E	For easy fresh air intake by using the knockout hole of indoor unit	
	Filter chamber	TCB-FC283UW-E	MMU-UP0071 to 0151WH-E	For use with filter chamber	
		TCB-FC803UW-E	MMU-UP0181 to 0301WH-E		
		TCB-FC1403UW-E	MMU-UP0361 to 0561WH-E		
	Super Long life filter	TCB-LF283UW-E	MMU-UP0071 to 0151WH-E	Use with TCB-FC283UW-E	
		TCB-LF803UW-E	MMU-UP0181 to 0301WH-E		
		TCB-LF1403UW-E	MMU-UP0361 to 0561WH-E		
1-way cassette	Ceiling Panel	RBC-UY32P-T	MMU-UP0071 to 0121YHP-T	Required accessory	
		RBC-UY42P-T	MMU-UP0151 to 0271YHP-T	Required accessory	
	Auxiliary fresh air flange	TCB-FF101URE2	MMU-UP0151 to 0271YHP-T	For easy fresh air intake by using the knockout hole of indoor unit. (dia.=100mm)	
	Air purifier kit	TCB-EAPC1UYHP-E	MMU-UP_1YHP-T		
	Occupancy sensor	TCB-SIR41UYP-E			
	Wireless remote controller	RBC-AX33UYP-E		For Installing on panel	
	Wireless remote controller	RBC-AXU31-E		For installing as stand alone	
Slim duct	Auxiliary fresh air flange	TCB-FF101URE2	MMD-UP_1SPHY-E	For easy fresh air intake by using the knockout hole of indoor unit. (dia.=100mm)	
Concealed duct	Spigot shaped flange	TCB-SF56C6BE	MMD-UP0071 to 0181BHP-T		
		TCB-SF80C6BE	MMD-UP0241 to 0301BHP-T		
		TCB-SF160C6BE	MMD-UP0361 to 0561BHP-T		
Concealed duct high static pressure	Long life filter kit	TCB-LK801D-E	MMD-UP0181 to 0271HP-T		
		TCB-LK1401D-E	MMD-UP0361 to 0561HP-T		
		TCB-LK2801DP-E	MMD-UP0721 to 0961HP-T		
	Spigot shaped flange	TCB-SF80C6BE	MMD-UP0181 to 0271HP-T		
		TCB-SF160C6BE	MMD-UP0361 to 0561HP-T		
	Auxiliary fresh air flange	TCB-FF151US-E	MMD-UP_1HP-T		
	Drain Pump kit	TCB-DP40DPE			


TECHNICAL GUIDEBOOK

Indoor units accessories

Indoor unit type	Parts name	Model name	Applied model	Notes	Remarks
Ceiling	Drain pump kit	TCB-DP31CE	MMC-UP_1HP-T	Lift up to 600 mm	Use TCB-KP13, 23CE
	Elbow Piping kit	TCB-KP13CE	MMC-UP0151 to 0181HP-T		
		TCB-KP23CE	MMC-UP0241 to 0561HP-T		
	Wireless remote controller	RBC-AXU31C-E	MMC-UP_1HP-T	For installing on panel	
Fresh air intake	Wireless remote controller	RBC-AXU31-E	MMC-UP_1HP-T	For installing as stand alone	
	High-efficiency filter 65	TCB-UFM0481D-E	MMD-UP0481HFP-T	Dust collecting effect: 65% (NBS Colorimetric method)	Use with TCB-FC0481DF-E
		TCB-UFM1281D-E	MMD-UP0721 to 1281HFP-T		Use with TCB-FC1281DF-E
	High-efficiency filter 90	TCB-UHF0481D-E	MMD-UP0481HFP-T	Dust collecting effect: 90% (NBS Colorimetric method)	Use with TCB-FC0481DF-E
		TCB-UHF1281D-E	MMD-UP0721 to 1281HFP-T		Use with TCB-FC1281DF-E
	Stand alone long life prefilter	TCK-LK1401D-E	MMD-UP0481HFP-T		
		TCK-LK2801DP-E	MMD-UP0721-1281HFP-T		
	Filter chamber	TCB-FC0481DF-E	MMD-UP0481HFP-T	For high efficiency filter or long life prefilter	
		TCB-FC1281DF-E	MMD-UP0721 to 1281HFP-T		
Air-to-air heat exchanger with Dx-coil	Drain pump kit	TCB-DP40DFP-E	All models	Lift up to 330 mm	
		TCB-DP31HEXE	MMD-VN502/802/1002HEX1E & MMD-VN1002HEX1E2	Lift up to 330 mm	

Refrigerant accessories

Model name	Specification	Picture	Total capacity codes
Compatible SMMS ∞			
RBM-BY55EC			under 6.4 HP
RBM-BY105EC			from 6.4 to 14.2 HP
RBM-BY205EC	Branching joint		from 14.2 to 25.2 HP
RBM-BY305EC			from 25.2 to 61.2 HP
RBM-BY405EC			61.2 HP or more
RBM-HY1043E	Headers branching four-way		< 14.2 HP
RBM-HY2043E			< 14.2 - 25.2 HP
RBM-HY1083E	Headers branching eight-way		< 14.2 HP
RBM-HY2083E			< 14.2 - 25.2 HP
RBM-BT14E	Joints for connection of outdoor units		< 26 HP system capacity
RBM-BT24EC			> 26 < 62 HP system capacity
RBM-BT34EC			> 62 HP system capacity

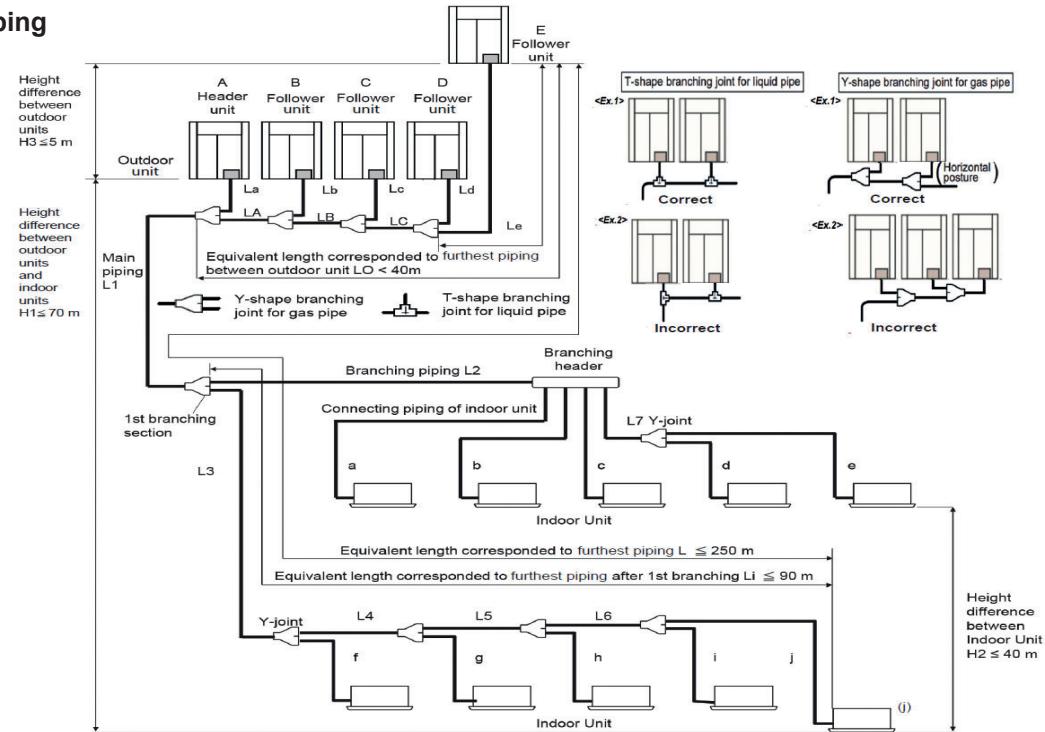
SMMS ∞ piping




> SYSTEM RESTRICTION

	SMMS[®]	SMMS-7
Outdoor unit combination	Up to 5 units	Up to 3 units
Total capacity of outdoor units	Up to 120HP	Up to 60HP
Indoor unit connection	Up to 128 units	Up to 64 units
Total capacity of indoor units	H2 ≤ 15m 15m > H2	Max. 200% 105%
		Max. 200% 105%

T-shape branching joint for liquid pipe

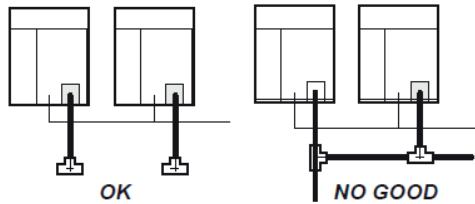


Y-shape branching joint for gas pipe

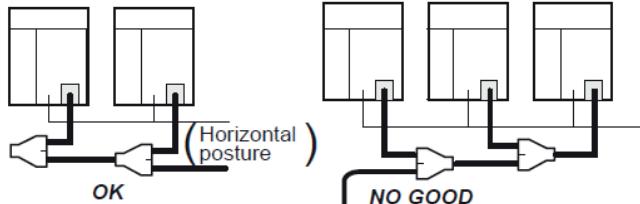

> CAUTION FOR INSTALLATION

Be careful of the connecting arrangement of the header unit and follower units. Set the outdoor units in order of capacity from the one with the largest capacity.

At a level position

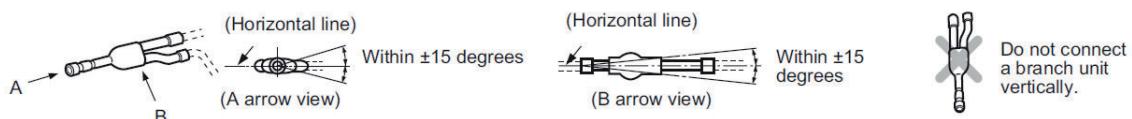


Do not connect a branch unit vertically.

> FREE BRANCHING SYSTEM


Line branching system	
Header branching system	
Header branching system after line branching	
Line branching system after header branching	
Header branching system after header branching	

TECHNICAL GUIDEBOOK

Electrical wiring

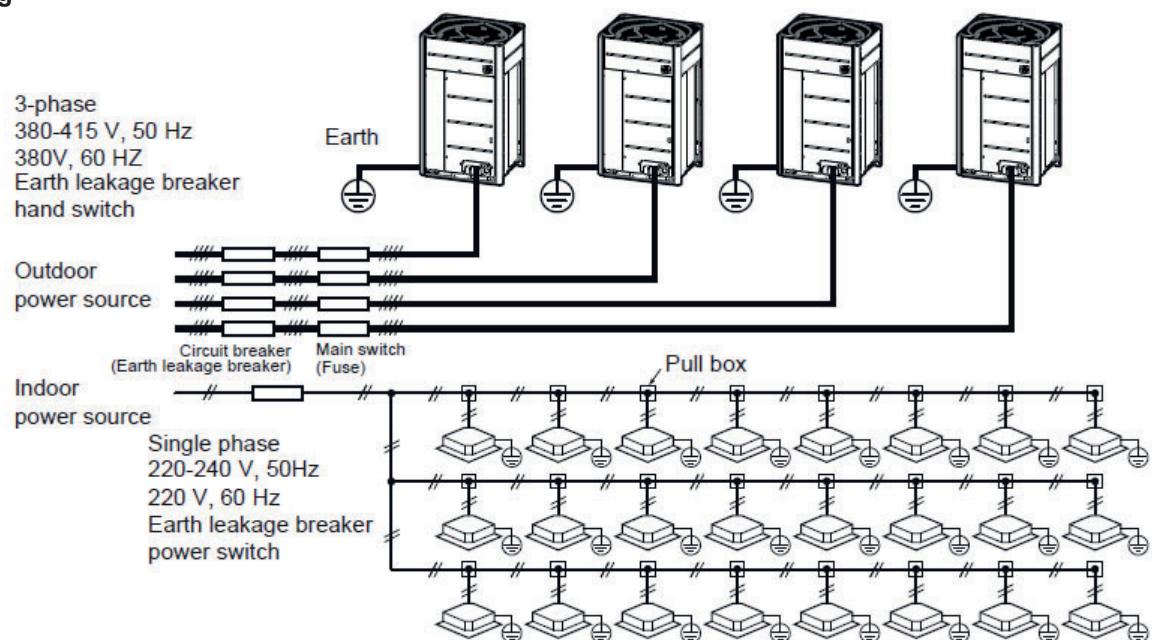


Sound pressure level measurement

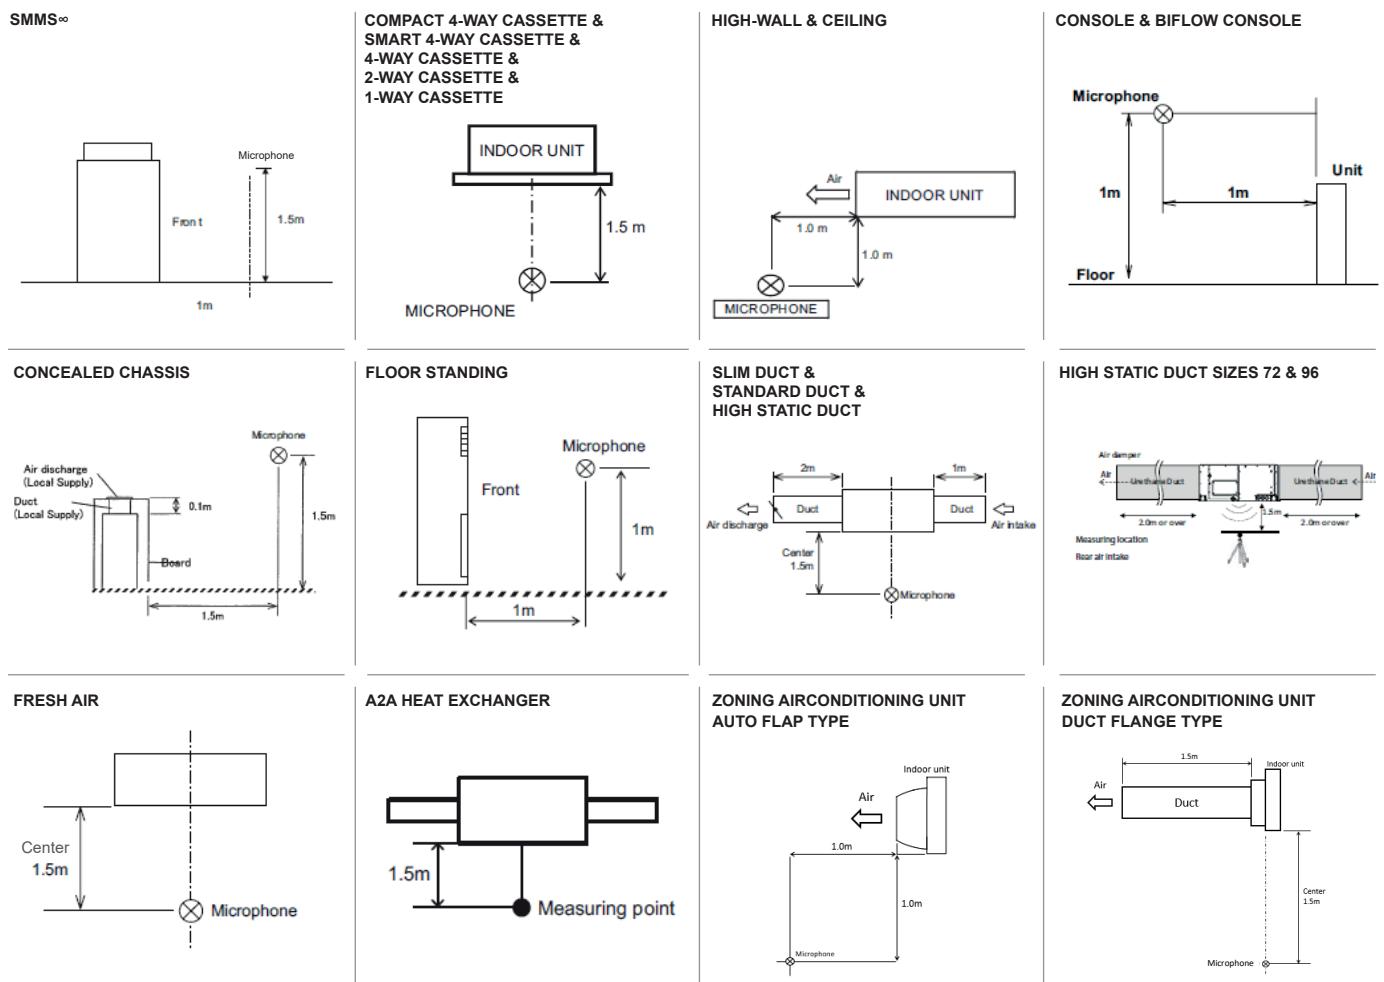

> SELECTION TOOL




Software main screen

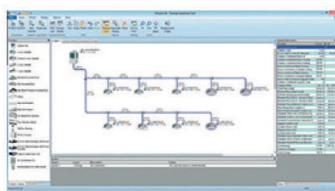


Toshiba Selection software has been fully designed, with a user-friendly interface allowing novice and expert users alike to create simple, yet detailed VRF system schematics. It is highly versatile, allowing the level of detail to be tailored to suit customer requirements. The software also allows the user to specify pricing strategy and create additional interim reports, including any diagrams and schematics required. Final detailed reports can then be produced and sent to customers in PDF format or in more complex files, such as AutoCAD DXF, allowing simple integration into their existing software packages.

Project fully customizable

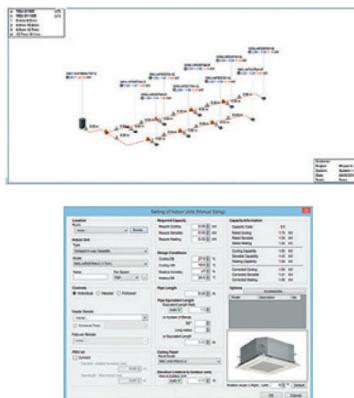


Complete report

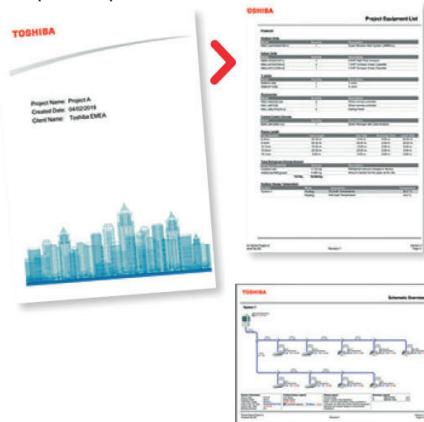


> SERVICE TOOL

Save time during commissioning and maintenance. Choose between the "Wave Tool Advance" using Smartphone NFC connection or the link adaptor connected to the outdoor or indoor unit.

NEW Application Wave Tool Advance

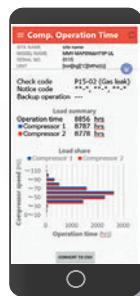

Wireless connection using smartphone*
NFC technology to collect system data

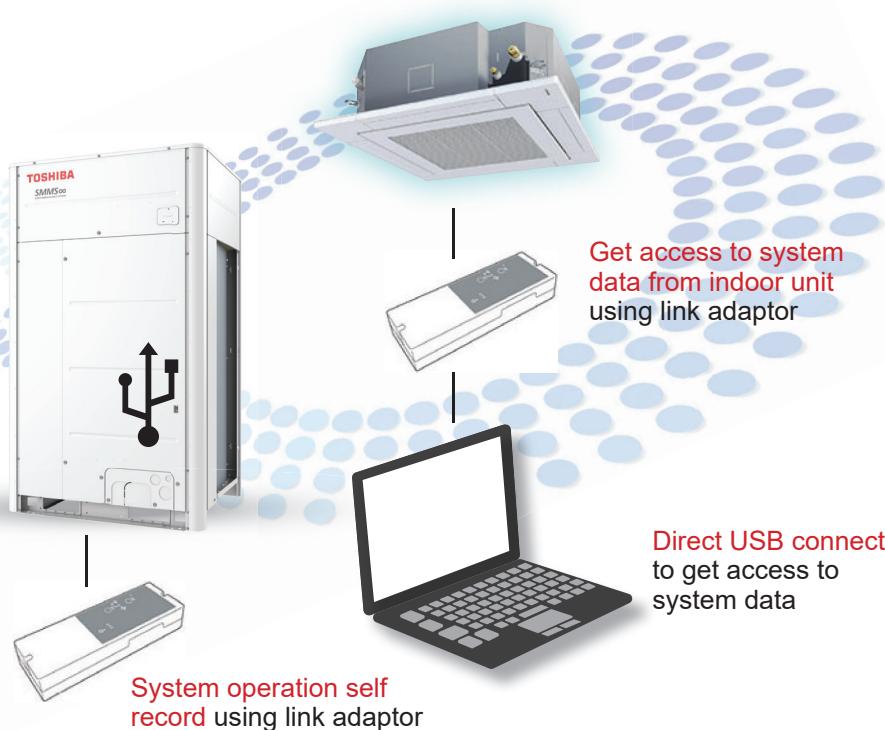

Direct USB connection to get access to system data

NOTE


TOSHIBA



Notice: - Products listed in this catalogue use HFC refrigerant R410A with a GWP of 2,088*.

- Toshiba is committed to continuously improving its products to ensure the highest quality and reliability standards, and regulations and market requirements. All features and specifications are subject to change without prior notice.

*The GWP value is calculated based on information provided in the EU F gas Regulation and IPCC Fourth Assessment Report.



Better Air Solutions

Through our commitment to world-class **efficiency**, versatile **scalability** and leading **quality**, Toshiba Air Conditioning advances leading-edge technologies to find the most forward-thinking solutions possible for your world.



MASCI

ISO 9001 QMS18026/1686
ISO 14001 EMS18012/471
ISO 45001 OHSMS19061/078

CTH2022-SMMS∞

Carrier (Thailand) Ltd.

1858/63-74, 14, 15 Floor, Debaratna Road, Km.4.5, Bangna Tai,
Bangna Bangkok 10260 Thailand Tel. 0-2090-9999

Carrier reserves the right to make changes in specifications without prior notice.